







5/3-Way spool valve, 1/8" ... 1/2"

Series K53P2



Design type	5/3-way spool valve, Actuation pneumatic/pneumatic
Connection	G1/8" ... G1/2" according to ISO228/1
Materials	Body Nickel-plated aluminium, Slide valve Aluminium, Seals NBR
Mounting type	Through bores in the valve body
Mounting position	any
Medium	filtered and lubricated or non-lubricated compressed air
Medium temperature	0...+40°C
Ambient temperature	-10...+50°C

Notes:



Application	Valve size 1/8" only with silencer series SLN-RB
	Technical documentation for base plate see separate data sheet CAD files are available in the STASTO Store at www.stasto.eu

Type code

K	53	P	2	3	18
			3	pressurized	18G1/8"
			6	locked	14G1/4"
			9	exhausted	12G1/2"




Dimensions

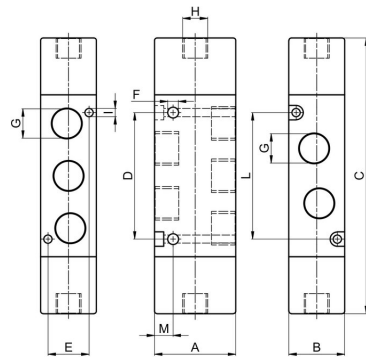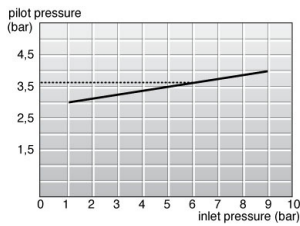


Connection G	Nominal size DN [mm]	Pressure range [bar]	A	B	C	D	E	F	H	I	L	M	Flow rate* [Nl/min]	Type
G1/8"	6	3...9	28	18	89	35	13	3,2	G1/8"	3,2	35	8	552	K53P2.18
G1/4"	8	3...9	32	22	109	50	16,2	4,2	G1/8"	3,5	50	7,3	1040	K53P2.14
G1/2"	14	3...9	50	30	108	45,6	-	5,2	G1/8"	-	-	11	3500	K53P2.12

*Reference pressure 6bar, Reference temperature 20°C


Flow diagram

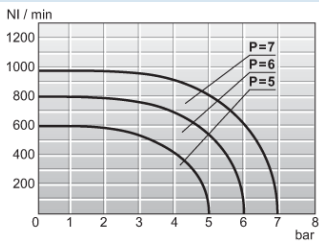

Flow diagram 1/8"

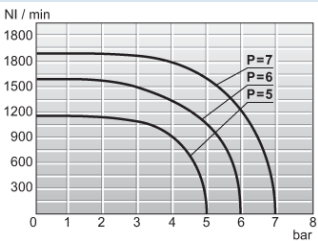

Flow diagram 1/4"

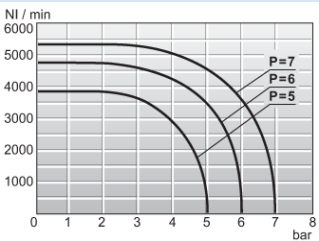

Flow diagram 1/2"

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Way-valves - electrically / pneumatically / 3/2- 5/2- 5/3-way valves - series K (connector size 16mm) / 5/3-way valve Series K5.P