







5/3-Potna drsni ventil, 1/8" ... 1/2"

Serijska K53P2



Konstrukcija	5/3-potna drsni ventil, Aktiviranje pnevmatsko/pnevmatsko
Priključek	G1/8" ... G1/2" po ISO228/1
Materiali	Telo Nikljan aluminij, Drsnik Aluminij, Tesnila NBR
Način pritrditve	Pretočne izvrtine v telesu ventila
Položaj vgradnje	poljubno
Medij	filtriran in naoljen ali nenaoljen stisnjen zrak
Temperatura medija	0...+40°C
Temperatura okolice	-10...+50°C

Opombe:



Uporaba	Velikost ventila 1/8" samo z dušilnikom zvoka serije SLN-RB
	tehnična dokumentacija za osnovno ploščo glejte ločen podatkovni list CAD-datoteke so na voljo v trgovini STASTO na www.stasto.eu

Tipski ključ

K 53 P 2	3	18
	3 pod tlakom	18G1/8"
	6 blokirano	14G1/4"
	9 odzračen	12G1/2"



Dimenzije

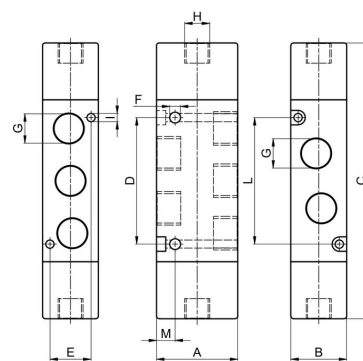

Priključek G	Nazivni premer DN [mm]	Tlačno območje [bar]	A	B	C	D	E	F	H	I	L	M	Pretok* [NI/min]	Tip
G1/8"	6	3...9	28	18	89	35	13	3,2	G1/8"	3,2	35	8	552	K53P2.18
G1/4"	8	3...9	32	22	109	50	16,2	4,2	G1/8"	3,5	50	7,3	1040	K53P2.14
G1/2"	14	3...9	50	30	108	45,6	-	5,2	G1/8"	-	-	11	3500	K53P2.12

*Referenčni tlak 6bar, Referenčna temperatura 20°C

Diagram pretoka




Diagram pretoka 1/8"




Diagram pretoka 1/4"




Diagram pretoka 1/2"

Ilustracije nezavezujoče

Prilazimo si pravico do sprememb konstrukcije, mer in materialov.

Pnevmatika / Potni ventili - električno / pnevmatsko / 3/2- 5/2- 5/3-potni ventili - serija K (širina vtiča 16mm) / 5/3-potni ventili serija K5.P

Različica 7

138291 / Ustvarjeno 2026/33 SL

IZDELANO V EVROPI

+386 51 253 255

slovenia@stasto.eu

© STASTO AVTOMATIKA d.o.o.

www.stasto.si

Odpre serijo na spletu

Stran 2 / 2

