

Directional control valves - mechanically actuated

1/8" up to 1/4"

Series VC



VCMS32 . M .



VCMS52M1 .



VCMS52S1 .



VCLR32.M8



VCLR52M18



VCLR52018



VCLL32.M8






VCLL52M18




Design type	Slide valve, mechanically actuated
Connection	G1/8" ... G1/4" according to ISO228/1
Nominal size	G1/8" DN 6mm, G1/4" DN 8mm
Flow rate	G1/8" 650NI/min, G1/4" 1080NI/min
Pressure range	0...10bar
Materials	Body Nickel-plated aluminium, Slide valve Stainless steel, Seals NBR
Mounting type	Through bores in the valve body
Mounting position	any
Medium	filtered and lubricated or non-lubricated compressed air
Medium temperature	0...+40°C
Ambient temperature	-10...+50°C
Note	CAD files are available in the STASTO Store at www.stasto.eu





VCMS32 . M8 3/2-way valve G1/8" Cam/spring

		Function	F min.	F max.	Type
		NC	20N	40N	VCMS326M8
		NO	20N	40N	VCMS329M8



VCMS32 . M4 3/2-way valve G1/4" Cam/spring

		Function	F min.	F max.	Type
		NC	40N	60N	VCMS326M4
		NO	40N	60N	VCMS329M4



VCMS52M18 5/2-way valve G1/8" Cam/spring

		F min.	F max.	Type
		20N	40N	VCMS52M18



VCMS52M14 5/2-way valve G1/4" Cam/spring

		F min.	F max.	Type
		40N	60N	VCMS52M14




VCMS52S18 5/2-way valve G1/8" Cam/cam

		Type
		VCMS52S18



VCMS52S14 5/2-way valve G1/4" Cam/cam

		Type
		VCMS52S14



VCLR32 . M8 3/2-way valve G1/8" Roller/spring

		Function	F min.	F max.	Type
		NC	10N	20N	VCLR326M8
		NO	10N	20N	VCLR329M8

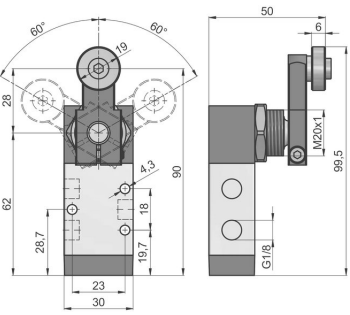

VCLR52M18 5/2-way valve G1/8" Roller/spring

		F min.	F max.	Type
		10N	20N	VCLR52M18

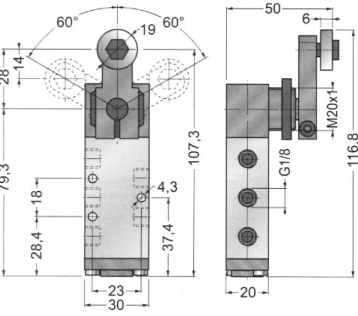

VCLR52018 5/2-way valve G1/8" Roller/roller

		Type
		VCLR52018

VCLL326M8 3/2-way valve G1/8" Roller/spring

		Function	Type
		NC	VCLL326M8

VCLL52M18 5/2-way valve G1/8" Roller/spring

		Type
		VCLL52M18

Illustrations non-binding
Design, dimensional and material changes reserved

