



two-hand safety valve type ZH-A



function	a two-hand safety valve requires a synchronised operation of both hands to start or continue a process or machine. the outlet signal is active if both inlet signals appear within max. 0,4 seconds. the release of just one inlet signal interrupt the outlet signal. to reactivate the outlet signal both inlet signal have to be releases before.
connection	push-in fitting for outside hose diameter 4mm
materials	body POM, inner parts brass/POM, seals NBR
nominal diameter	2,5mm
pressure range	2,5 to 8bar
type of fixing	mounting on DIN rail according to EN60715, two side holes for screws M4
medium	dried, filtered and non lubricated compressed air
medium temperature	-10 to +50°C
ambient temperature	-10 to +50°C
permissible switching differential	maximum 0,4s
approval	certification TÜV-A-MHF/MG/10-05159A

dimensions and connection drawing

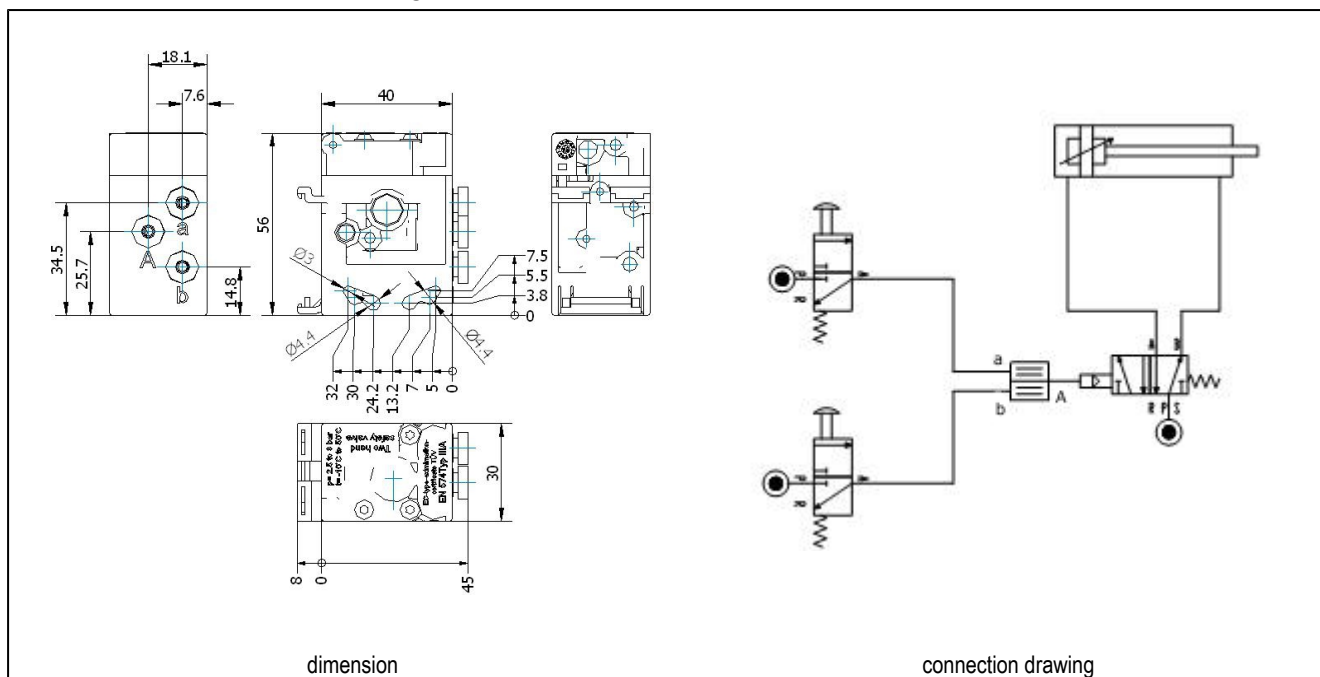

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice