


Nepovratni ventil Serija MV23



Konstrukcija	Nepovratni ventil u prolaznoj izvedbi
Materijal	Telo Mesing niklovano, Zaptivke NBR
Funkcija	slobodan prolaz u jednom smeru, Sprečavanje protoka u suprotnom smeru
Priključci sa navojem	M5 posle ISO R/262, G1/8"...G1/2" posle ISO228/1
Položaj ugradnje	proizvoljno
Medij	Komprimovani vazduh, neutralni gasovi
Temperatura medijuma	-10°C...+70°C
Radni pritisak	0,2...10bar
Smer protoka	je označeno strelicom



Dimenzije



D1	L1	L2	Nominalni protok [Nl/min]	CH	Težina [g]	Tip
M5	5	25	160	8	8	MV23-00-M5
G1/8"	8	36,5	900	13	26	MV23-00-18
G1/4"	9	42,5	1500	16	38	MV23-00-14
G3/8"	10,5	51	2400	20	72	MV23-00-38
G1/2"	12,5	62	3400	24	119	MV23-00-12



Tabele protoka

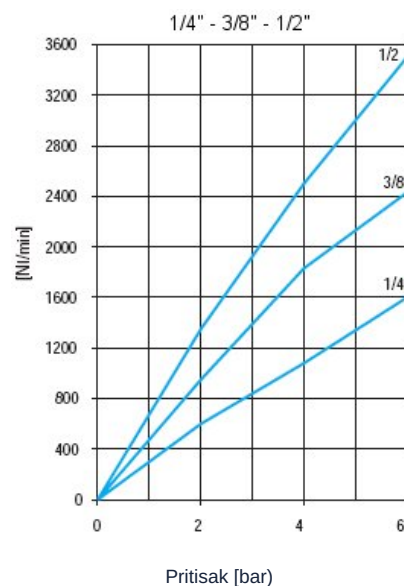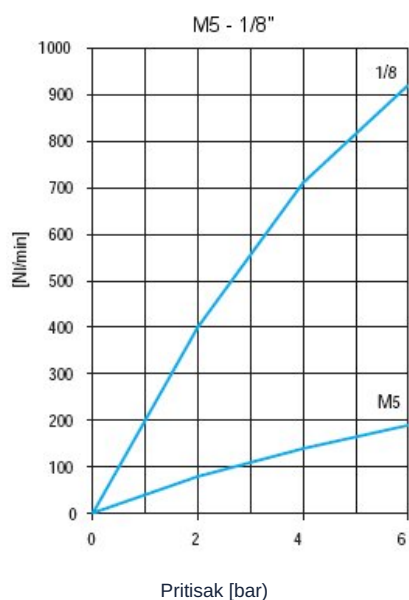

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i materijalne izmene.

[Pneumatika](#) / [Regulatori protoka i prigušnice](#) / [Jednosmerni ventili](#) / [nepovratni ventil serije MV23](#)

Verzija 6

138413 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 2 / 2

