
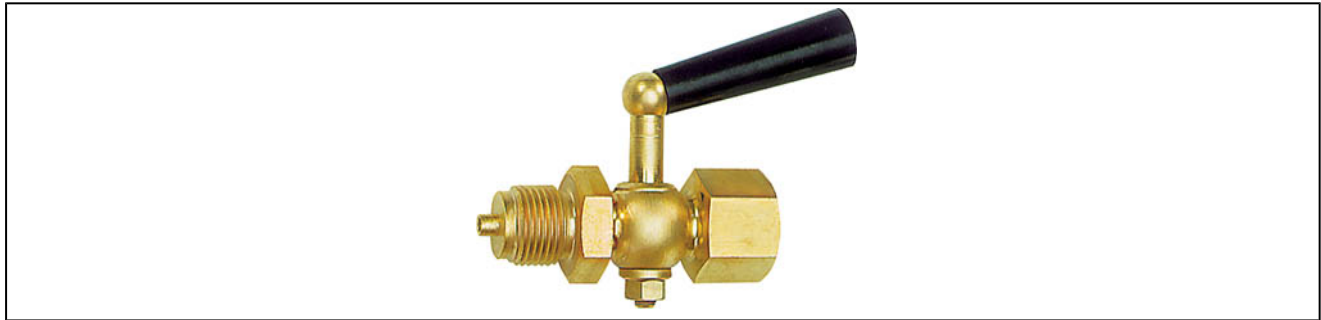





manometer stop-valve

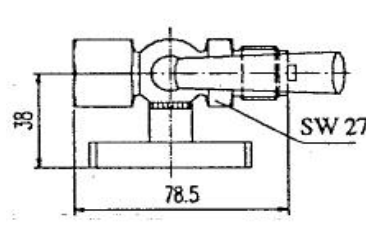





design	manometer stop-valve with drain hole
connection	female to female coupling/spigot G1/4" ...G1/2"
materials	9007...9010/60: body and cone made of brass, handle made of heat resistant plastic 9009/ES: body and cone made of stainless steel AISI 316Ti, handle made of heat resistant plastic
medium	non-toxic and non-inflammable liquids and gases, which do not affect the used materials
medium temperature	-10...+50°C
operating pressure	see table

dimensions

9007	9008	9009/M 9009/ES	9010/60
			

connection	max. operating pressure [bar]	material	standard	test flange	weight [kg]	type
G1/4"	6	brass	-	-	0,07	9007
G3/8"	16	brass	-	-	0,15	9008
G1/2"	16	brass	DIN16261B	-	0,31	9009/M
G1/2"	16	stainless steel AISI 316Ti	DIN16261B	-	0,61	9009/ES
G1/2"	16	brass	-	60x25x10	0,43	9010/60

handle position

			
relieving position	operating position	blow out position	test position
inlet pipe closed pressure measuring instrument out of order	inlet pipe open pressure measuring instrument under pressure	inlet pipe open pressure measuring instrument out of order	at valve with test flange only

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice