


on-off valve 3/8"
type V3-38




design	on-off valve, 3/2-way, lockable, with exhaust
connection	G3/8" according to ISO228/1
exhaust port	G1/4" according to ISO228/1
materials	body acetal resin (POM), thread connections brass CuZn40Pb2
function	to switch off the supply pressure and exhaust the system
type of fixing	installation in a pipe system or wall bracket
mounting position	any
medium	filtered and lubricated or non lubricated compressed air
medium temperature	+5°C to +50°C
ambient temperature	+5°C to +50°C
inlet pressure	max. 12,5 bar
flow direction	is marked by an arrow
scope of supply	including locking device
accessories	silencer 2941-1/4"

dimensions

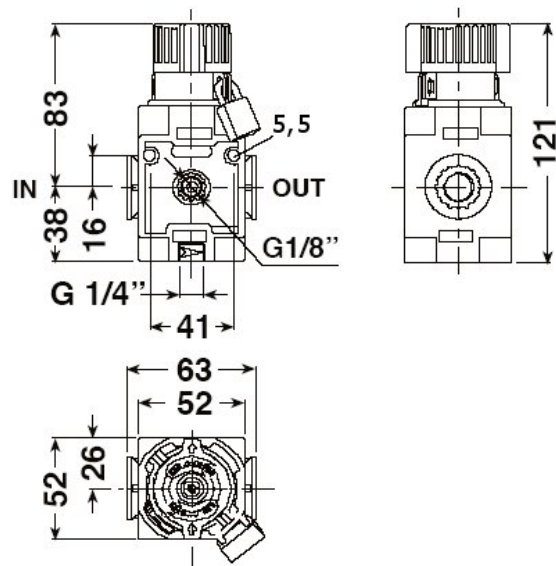

weight 0,27 kg

flow diagram

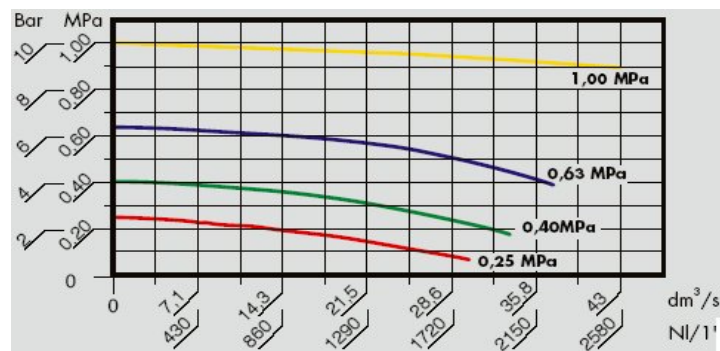

inlet pressure = 10bar, flow rate at standard conditions

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice