


automatic valve for drainage of condensate type K-SA



design	automatic drain valve, float level actuated
connection	for hose with inner diameter 7,5mm
materials	body acetal resin (POM), filter element made of stainless steel
function	automatically, float actuated drain valve to drain pollution of pressurized air, which are separated in filters and filter-pressure regulators
type of fixing	automatic drain valve can be mounted in all filters and filter-pressure regulators of series FRL instead of manually drain
mounting position	vertical
medium temperature	+5°C to +50°C
ambient temperature	+5°C to +50°C
pressure range	1,5-10 bar
scope of supply	completely with mounting kit

dimensions

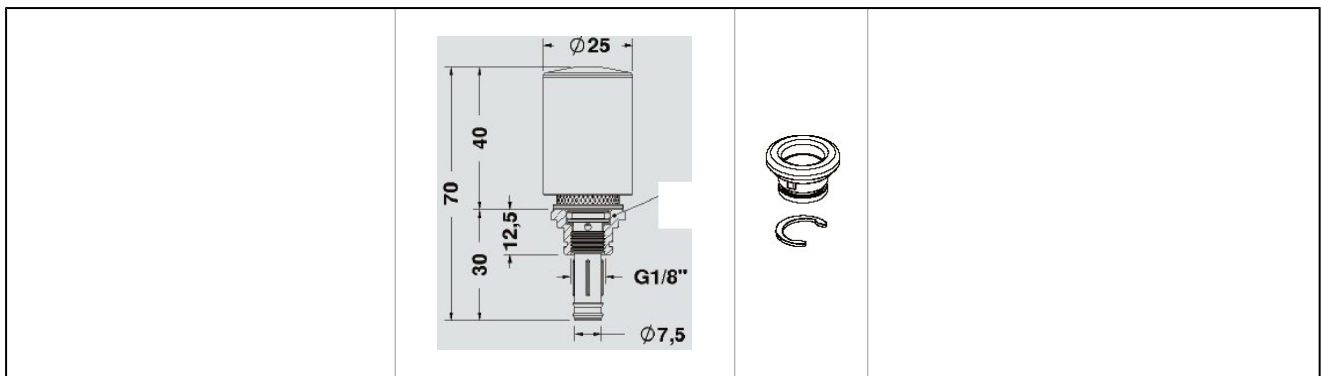

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice