



Kuglasti ventili od mesinga, Ugaoni oblik, R1/2" do R1"

Seriya 350

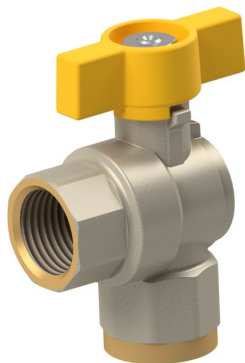

Typ 350.203/204/205

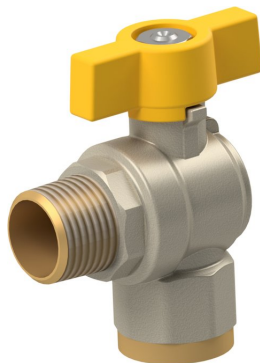

Typ 350.303/304/305




Typ 350.403/404/405


Konstrukcija	Kuglasti ventil sa plivajućom kuglom, Ugaoni oblik
Aktiviranje	okretanjem ručke za 90°
Priključak	1/4"...1" prema ISO7/1R odnosno Rp posle ISO7/1
Materijali	Mesing CW617N niklovano, Kugla mesing CW617N tvrdo hromirana, Zaptivke PTFE/NBR, Okretna ručica aluminijum žuto presvučena
Područje primene	gasoviti i tečni mediji, koji ne napadaju upotrebljene materijale
Temperatura medijuma	Tečnosti -15...+100°C, zapaljivi gasovi -15...+60°C
Radni pritisak	Radni pritisak prema tabeli i dijagramu pritisak-temperatura zapaljivi gasovi maks. 5bar
Način pričvršćivanja	Montaža u kruti cevovodni sistem
Položaj ugradnje	proizvoljno
Odobrenje	EN331 za zapaljive gasove



Dimenzije

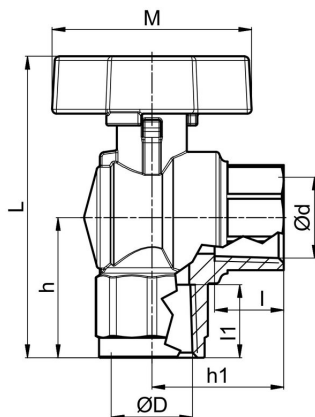


Ød/ØD	DN [mm]	h	h1	l	l1	L	M	PN [bar]	Tip
1/2"	15	33	31	16,2	17,2	71	47	40	350.203
3/4"	20	38	35	16,2	18,5	84	56	40	350.204
1"	25	46	42	22,6	22,5	96	56	40	350.205

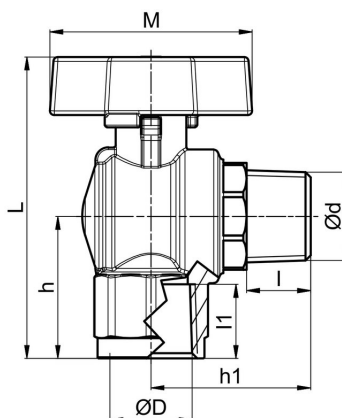


Ød/ØD	DN [mm]	h	h1	l	l1	L	M	PN [bar]	Tip
1/2"	15	33	37	15	17,2	71	47	40	350.303
3/4"	20	38	43	16,1	18,5	84	56	40	350.304
1"	25	46	51	19	22,7	96	56	40	350.305



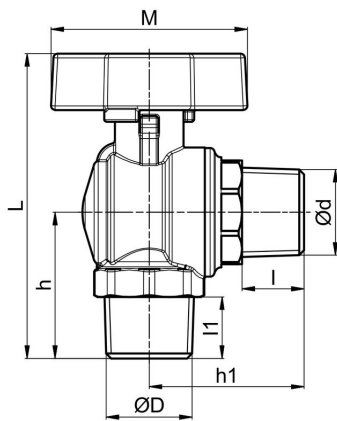

ØD/Ød	DN [mm]	h	h1	l	l1	L	M	PN [bar]	Tip
1/2"	15	35	37	14,9	14,7	73	47	40	350.403
3/4"	20	40	43	16,1	16,2	86	56	40	350.404
1"	25	48	51	19	19	98	56	40	350.405

Dijagram pritisak-temperatura

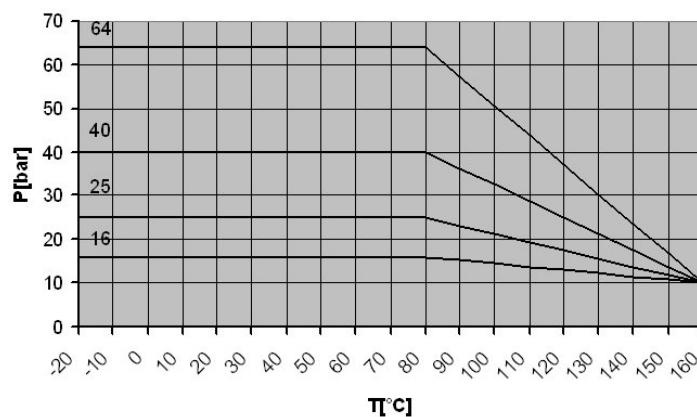

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i materijalne izmene.

Armature / kuglasti ventili / kuglasti ventili - mesing / kuglasti ventil od mesinga serije 350

Verzija 5

137940 / Generisano 2026/29 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 3 / 3

