





3/2 - way solenoid valve direct acting, 1/4" mixer function, series SL096



SPECIFICATION	
general	
type of construction	3/2-poppet valve, normally closed NC or normally open NO, coil 360° rotatable
operator	solenoid, or optional by manual override
ports	G1/4, tube with G1/8 female thread
ambient temperature	-20°C to +50°C, higher allowed ambient temperatures on request
fluid temperature	dependent on sealing material and coil
viscosity	max. 21mm²/s (cst) bzw 3°E
material	body and tube: stainless steel inner parts and nozzle : stainless steel AISI 303 and AISI 430FR sealing: see type selection
mounting	2 threads M4
installation	in any position, preferable vertical fixed solenoid coil
unit of supply	without connector
electrical data	
voltage	DC voltage or AC voltage
standard voltage	24V DC, 24V AC, 230V AC
special voltage on request	6V-207V DC, 12V-240V, 50Hz or 60Hz
acceptable voltage tolerance	+/- 10%
power consumption	see specifications at solenoid coils
coil type	temperature class F (155°C), winding class H (180°C)
duty cycle	100% ED (DB), continuous operation
protection class	IP65 according DIN EN 60529 (DIN 40050) with correctly mounted connector
pneumatic – hydraulic	
flow medium	all liquids and gases, which don't attack the used material
response time	12 – 20ms
special equipment on request	coil type with cable, coil EEXmIIT5, coils for temperature class H (180°C), other sealing materials

We reserve the right to change design, dimensions or materials without notice.

3/2 - way solenoid valve direct acting, 1/4"
mixer function, series SL096



3/2 way solenoid valve normally closed, pressure port at 2 (P)				
ports	NW DN (mm)	maximum differential pressure in bar **	kv-value body nozzle (m³/h)	kv-value pole nozzle (m³/h)
G1/4	1,5	0-18	0,08	0,07
	2,0	0-13	0,13	0,12
	2,5	0-8	0,19	0,18
	3,0	0-6	0,25	0,23
	3,5	0-3,5	0,30	0,23
	4,0	0-2,5	0,37	0,23
	1,5	0-18	0,08	0,07
	2,0	0-13	0,13	0,12
	2,5	0-8	0,19	0,18
	3,0	0-6	0,25	0,23
	3,5	0-3,5	0,30	0,23
	4,0	0-2,5	0,37	0,23
	1,5	0-30	0,08	0,07
	2,0	0-23	0,13	0,12
	2,5	0-18	0,19	0,18
	3,0	0-14	0,25	0,23
	3,5	0-10	0,30	0,23
	4,0	0-8	0,37	0,23

** All specifications refer to fluids with a maximum viscosity of 37 cst. (5°E). Higher viscosities cause extended response time and need a special specification of the valve.

sealing material	Code	fluid temperature	applicable for	standard voltage
NBR (Perbunan)	B	max. 80 °C	neutral gases and liquids	24V = DC
EPDM	E	max. 120 °C	hot water, steam, not for oil and grease	24V ~ (50Hz)
FPM	V	max. 130 °C	oil, petrol, oxygen	230V ~ (50Hz)

coil power consumption at 20 °C, protection class, interface				
inrush power ~ (50Hz) VA	rated power ~ (50Hz) VA	power = (DC) (W)	protection class with/without connector	interface
32	14	12	IP65 / IP00	Connector DIN EN 175301 – 803 (DIN 43650), type A
70	32	27	IP65 / IP00	Connector DIN EN 175301 – 803 (DIN 43650), type A
9	9	10,3	IP65	Coil explosion proof according to ATEX II 2G Ex mb II T4 II 2D ExtDA21 IP65 T130°C cable length 3 meter

We reserve the right to change design, dimensions or materials without notice.


3/2 - way solenoid valve direct acting, 1/4" mixer function, series SL096

3/2 way solenoid valve normally open, pressure port at 3 (R)						
threaded connection	NW DN body nozzle (mm)	NW DN pole nozzle (mm)	maximum differential pressure in bar **		kv-value body nozzle (m³/h)	kv-value pole nozzle (m³/h)
			fluid compressed air	fluid water		
G1/4	1,5	1,5	0 – 26	0 – 23	0,08	0,07
G1/4	2,0	2,0	0 – 16	0 – 14	0,13	0,12
G1/4	2,5	2,5	0 – 11	0 – 10	0,19	0,18
G1/4	3,0	3,0	0 – 7	0 – 6	0,25	0,23
G1/4	1,5	1,5	0 – 26	0 – 23	0,08	0,07
G1/4	2,0	2,0	0 – 16	0 – 14	0,13	0,12
G1/4	2,5	2,5	0 – 11	0 – 10	0,13	0,18
G1/4	3,0	3,0	0 – 7	0 – 6	0,25	0,23

** All specifications refer to fluids with a maximum viscosity of 31 cst. (3°E). Higher viscosities cause extended response time and need a special specification of the valve.

3/2 way solenoid valve with mixer function
technical data on request according to the input pressures at 2 und p2.

3/2 way solenoid valve with distribution function
technical data on request according to the pressure level at 1,2 und R.

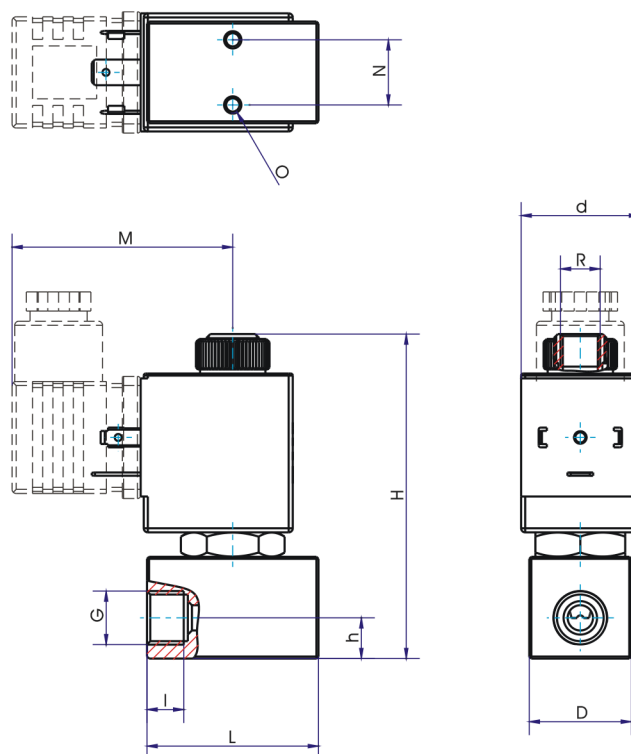

dimension table														
G	N	O	H	h	I	L	D	R	coil E1		coil EX		coil E3	
									M	d	M	d	M	d
G 1/4	16	M4	80	10	9	42	25	G 1/8	52	30	45	30	54	36