



2/2 - way coaxial valve - externally controlled, DN125 series CVFF-125



normally closed (NC)




normally open (NO)


type designation	CVFF-125, with pilot valve CVFF-P-125
design	2/2-way coaxial valve , externally controlled, normally closed or normally open
mode of operation	pressure balanced, with spring return
nominal diameter	DN 125mm
connection	flange PN16/40
length	DIN 3202-F1/F7/F17
pressure range	0-16 or 0-40bar
back pressure	P2 > P1, available (max. 16bar)
materials	body aluminum valve seat plastic on metal, sealing materials PTFE, NBR, FPM, PU, PE the indications of material of the remarks exclusively refer to the valve connection parts coming into contact with the medium
media	emulsions, oils, neutral gases, (other media on request)
flow direction	A → B, according to identification, (special version bidirectional max. 16bar)
type of fixing	installed into rigid pipework
mounting position	any
vacuum leakage rate	$< 10^{-4} \text{ mbar} \cdot \text{l} \cdot \text{s}^{-1}$
kv value	227,0m³/h
operations	30/min.
switching time	open 700-3000ms, close 450-3000ms
damping	open/close: by throttling the pilot valve
medium temperature	with flanged pilot valve to +60°C (> 60°C on request)
ambient temperature	with flanged pilot valve to +50°C (> 50°C on request)
manual emergency override	via pilot valve
certifications	on request
weight	52,0kg
options	vacuum-test with certificate, limit switch inductive (NO contact PNP- Icomatic/Balluf), limit switch inductive NAMUR (+ switch amplifier), sensor/pressure gauge connection G 1/4"

type of current	AC and DC
standard voltage	230V/40-60Hz, 24VDC, acceptable voltage tolerance $\pm 10\%$
special voltage	on request
power consumption	DC: 4,8W, AC: inrush power 11,0VA, holding power 8,5VA
duty cycle	100% (continuous operation)
protection class	IP65 (IP54) according to DIN 40050 with correctly mounted connector (protection against the penetration of dust and jet water)
scope of supply	with connector acc. to EN175301-803-form B (previous DIN43650) respectively industrial form - cable inlet M16x1,5
optional	connector acc. to DESINA, connector acc. to VDMA
additional features	connector with integrated LED and VDR
explosion protection	Eex m II T5, power consumption 24VDC: 3,25W, 230VAC: 2,90W
	pneumatically controlled
control pressure range	4-10bar
air requirement	480cm ³ /stroke
switching speed	main valve can be adjusted by throttles on the pilot valve
control	preferably via a 5/2-way pilot valve
connection diagramme	NAMUR, (ISO 1 on request)
control ports	2/4: G1/4" (G3/8" on request)
	hydraulically controlled
control pressure range	30-60bar
control	preferably via a 4/2-way pilot valve
control ports	X/Y: G1/4" (NPT 1/4 on request)
order data	nominal diameter, connection, NC/NO function, operating pressure, flow rate, medium, medium temperature, ambient temperature, nominal voltage, nominal voltage limit switch, control
direction for use	the valves technical design is based on media and application, which may lead to deviations from the general information on the data sheet in terms of design, sealing materials and characteristics. if order or application information is inexact or incomplete, there is a risk of the incorrect design of valves for the intended use. This can have the effect that the physical and / or chemical properties of the used materials or seals for the intended purpose are insufficient.

dimensions

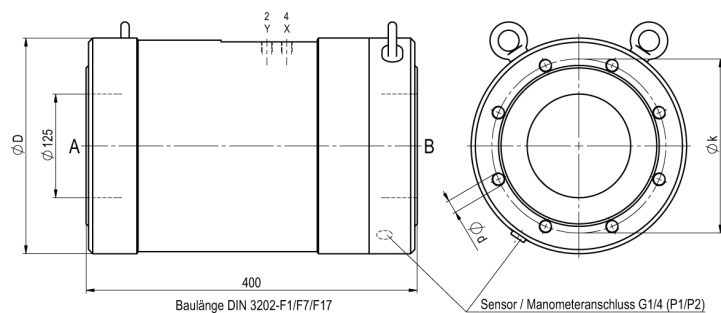

CVFF-125 function NC

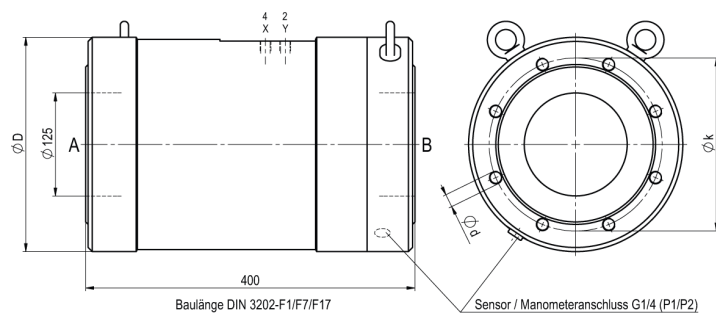

CVFF-125 function NO

flange PN	DIN	ØD	Øk	Ød
16	EN 1092-1	260	210	M16
40	EN 1092-1	280	220	M24

pilot valves



pilot valve ABS56
5/2-way valve NAMUR, electro-pneumatic, G1/4,
with exhaust throttle,
p = 4 - 10bar



pilot valve
5/2-way valve NAMUR, electro-pneumatic, G1/8,
with exhaust throttle,
p = 4 - 10bar



pilot valve
5/2-way valve ISO 1, electro-pneumatic, G1/4,
p = 4 - 10bar

electrical connection



electrical connection
coil M12x1



electrical connection
B type connector DIN EN 175301-803
respectively industrial form

limit switch



Icomatic plastic design
M12x1, DC 10 - 60V
AC 15 - 250V
-25...+85°C



Balluff metal
M12x1, DC 10 - 30V
-25...+70°C

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice