



3/2-way coaxial valve - externally controlled, DN32 series CVTE3/CVFE3-32

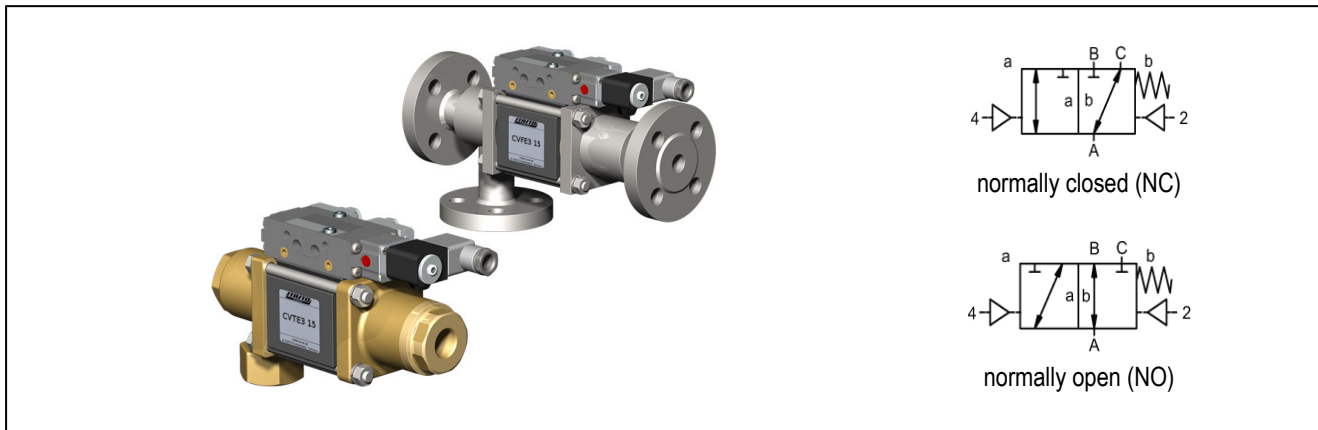

type designation	CVTE3-32, CVFE3-32, with pilot valve CVTE3-P-32, CVFE3-P-32
design	3/2-way-coaxial valve, externally controlled, normally closed or normally open
mode of operation	pressure balanced, with spring return, not free of overlapping
nominal diameter	DN 32mm
connection	CVTE3: G11/4"...G11/2", CVFE3: flange PN16/40/100, special flanges and -threads on request
pressure range	0-16, 0-40, 0-64 or 0-100bar, A → B max. 100bar / B → A max. 16bar / A → C max. 100bar / C → A max. 100bar
back pressure	P2 > P1, see pressure range
materials	optional body brass, nickel plated brass, steel nickel plated, zinc plated steel, nonferrous free or stainless steel valve seat plastic on metal, sealing materials PTFE, NBR, FPM, CR, EPDM the indications of material of the remarks exclusively refer to the valve connection parts coming into contact with the medium
media	gaseous - liquid - contaminated - highly viscous - gelatinous - pasty
flow direction	see pressure range
type of fixing	installed into rigid pipework, mounting bracket on request
mounting position	any
vacuum leakage rate	$< 10^{-6} \text{ mbar} \cdot \text{l} \cdot \text{s}^{-1}$
kv value	18,9m³/h
operations	150/min.
switching time	open 100-3000ms, close 100-3000ms
damping	open/close: by throttling the pilot valve
medium temperature	with flanged pilot valve to +60°C (pilot valve outside of temperature range of max. medium-temperature 160°C)
ambient temperature	with flanged pilot valve to +50°C
manual emergency override	via pilot valve
certifications	on request LR/GL/EN10204
weight	CVTE3 8,5kg, CVFE3 10,2kg
options	vacuum-test with certificate, limit switch inductive (NO contact PNP- Icomatic/Balluf), limit switch inductive NAMUR (+ switch amplifier), limit switch mechanical (change-over contact), purge connections, drain connections


type of current	AC and DC
standard voltage	230V/40-60Hz, 24VDC, acceptable voltage tolerance $\pm 10\%$
special voltage	on request
power consumption	DC: 4,8W (2,5W on request), AC: inrush power 11,0VA, holding power 8,5VA
duty cycle	100% (continuous operation)
protection class	IP65 (IP54) according to DIN 40050 with correctly mounted connector (protection against the penetration of dust and jet water)
scope of supply	with connector acc. to EN175301-803-form B (previous DIN43650) respectively industrial form - cable inlet M16x1,5
optional	connector acc. to DESINA, connector acc. to VDMA
additional features	connector with integrated LED and VDR
explosion protection	Eex m II T5, power consumption 24VDC: 3,25W, 230VAC: 2,90W
	pneumatically controlled
control pressure range	4-10bar
air requirement	23,0cm ³ /stroke
switching speed	main valve can be adjusted by throttles on the pilot valve
control	preferably via a 5/2-way pilot valve
connection diagramme	co-ax/NAMUR, (ISO 1 on request)
control ports	2/4: G1/8" (G1/4" on request)
	hydraulically controlled
control pressure range	10-30bar/30-60bar
control	preferably via a 4/2-way pilot valve
control ports	X/Y: G1/4" (NPT 1/4 on request)
order data	nominal diameter, connection, NC/NO function, operating pressure, flow rate, medium, medium temperature, ambient temperature, nominal voltage, nominal voltage limit switch, control, pressure connection A, B, or C
direction for use	the valves technical design is based on media and application, which may lead to deviations from the general information on the data sheet in terms of design, sealing materials and characteristics. if order or application information is inexact or incomplete, there is a risk of the incorrect design of valves for the intended use. This can have the effect that the physical and / or chemical properties of the used materials or seals for the intended purpose are insufficient.

dimensions

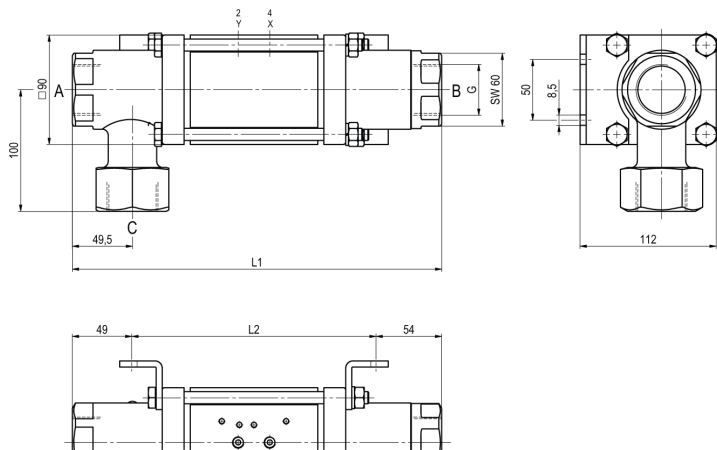

CVTE3-32 function NC

overall length	L1	L2	L3
standard	304	201	365
with 1/2 inductive limit switches	311	208	372
with grease press button	341	238	402
with mechanical limit switches	339	236	400

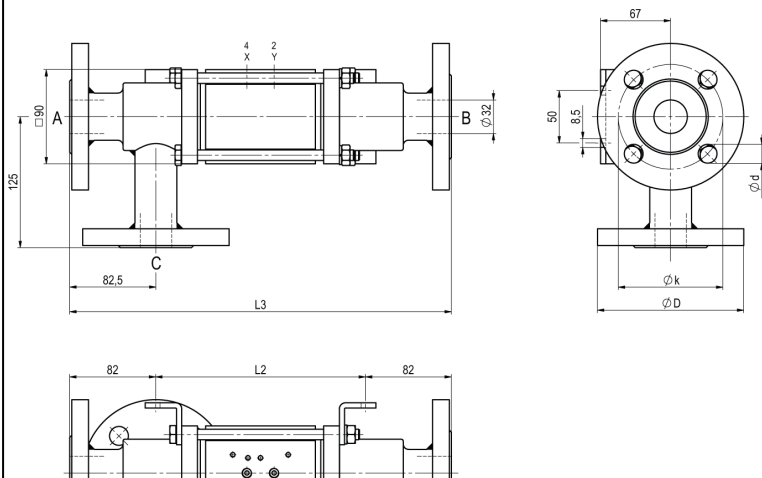

CVFE3-32 function NO

flange PN	DIN	ØD	Øk	Ød
16	EN 1092-1	140	100	18
40	EN 1092-1	140	100	18
100	EN 1092-1	155	110	22

mounting brackets are to be ordered separately

pilot valves



pilot valve ABS56
5/2-way valve NAMUR, electro-
pneumatic,
G1/4, with exhaust throttle,
p = 4 - 10bar



pilot valve
5/2-way valve NAMUR, electro-
pneumatic,
G1/8, with exhaust throttle,
p = 4 - 10bar



pilot valve
5/2-way valve ISO 1, electro-pneumatic, G1/4,
p = 4 - 10bar






pilot valve
5/2-way valve co-ax, electro-pneumatic, G1/4,
p = 4 - 10bar

electrical connection

 electrical connection coil M12x1	 electrical connection B type connector DIN EN 175301-803 respectively industrial form
---	---

limit switch

 Icomatic plastic design M12x1, DC 10 - 60V AC 15 - 250V -25...+85°C	 Balluff metal M12x1, DC 10 - 30V -25...+70°C	 Honeywell change-over contact
--	---	--

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice