


Brass ball valves, Miniature version Series BA195



Design type	Shut-off valve with floating ball
Connection	G1/4"...G1/2" according to ISO228/1
Materials	Body brass CW617N chrome-plated, Ball, brass CW614N, hard chrome-plated, Ball seal PTFE, Spindle seal FKM, Rotary knob polyamide
Mounting type	Installation in rigid piping system
Mounting position	any
Application range	Gases and liquids of group 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-10...+150°C
Operating pressure	Nominal pressure according to table and pressure-temperature diagram
Actuation	by 90° rotation of the hand lever


Dimensions

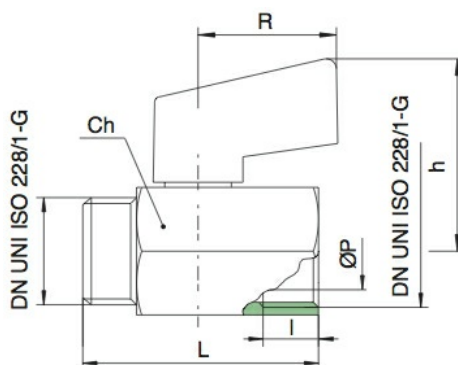

Connection	PN [bar]	Ch	h	I	L	R	P	Kv value [m³/h]	Weight [approx. kg]	Type
G1/4"	10	21	36,5	10	41	27	8	4,3	0,10	BA195-14-L
G3/8"	10	21	36,5	10	41	27	8	2,7	0,09	BA195-38-L
G1/2"	10	25	37,7	11	46	27	10	5,4	0,14	BA195-12-L



Pressure-temperature diagram

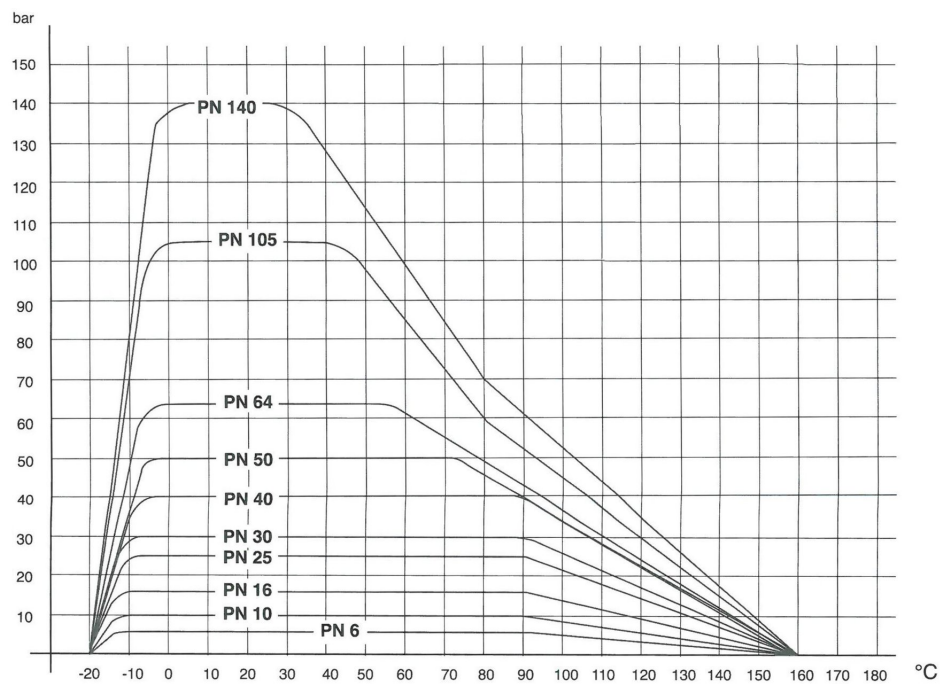

Illustrations non-binding
Design, dimensional and material changes reserved

Armatures / Ball valves - manually operated / Other materials - A02 / Ball valve made of brass Series BA195