


Spojke DN 7,2mm serija C0.S72-H




konstrukcija	spojke in vtične spojke, obojestransko tesnjenje
nazivna širina	DN 7,2mm
Materiali	telo, ventil in vtič Legirano jeklo 1.4305, Vzmet iz legiranega jekla 1.4310, tesnilo FKM
pretok	stisnjen zrak maks.1200NI/min pri 6bar (Δp 0,5bar), voda 10l/min (Δp 0,5bar)
Medij	plini in tekočine, ki ne napadajo uporabljenih materialov
temperatura medija	-20°C...+200°C
delovni tlak	-0,80...35bar

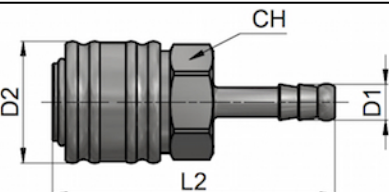
C0CS72-M Spojka - zunanji navoj

	D1	D2	L1	L2	CH	teža [g]	Tip
	G1/4"	27	9	41	22	82	C0CS72-M14-H
	G3/8"	27	10	42	22	82	C0CS72-M38-H
	G1/2"	27	12	44	24	95	C0CS72-M12-H


C0CS72-F Spojka - notranji navoj

	D1	D2	L1	L2	CH	teža [g]	Tip
	G1/4"	27	10,5	41,5	22	83	C0CS72-F14-H
	G3/8"	27	10,5	41,5	22	83	C0CS72-F38-H
	G1/2"	27	12	43	24	92	C0CS72-F12-H


C0CS72-H Spojka - cevni nastavki

	Notranji premer cevi		D1	D2	L2	CH	teža [g]	Tip
	6		7,5	27	56	22	92	C0CS72-H06-H
	9		10,5	27	56	22	92	C0CS72-H09-H
	13		14,5	27	56	22	95	C0CS72-H13-H


C0PS72-M Vtična spojka - zunanji navoj

	D1	L1	CH	teža [g]	Tip
	G1/4"	43	22	52	C0PS72-M14-H
	G3/8"	45	22	55	C0PS72-M38-H
	G1/2"	47	24	62	C0PS72-M12-H

C0PS72-F Vtična spojka - notranji navoj

	D1	L1	CH	teža [g]	Tip
	G1/4"	44	22	55	C0PS72-F14-H
	G3/8"	44	22	55	C0PS72-F38-H
	G1/2"	45,5	24	62	C0PS72-F12-H

C0PS72-H Vtična spojka - cevni nastavek

	Notranji premer cevi	D1	L1	CH	teža [g]	Tip
	6	7,5	54	22	55	C0PS72-H06-H
	9	10,5	54	22	55	C0PS72-H09-H
	13	14,5	54	22	57	C0PS72-H13-H

Slike niso zavezujoče.

Pridržane so konstrukcijske, dimenzijske in materialne spremembe.