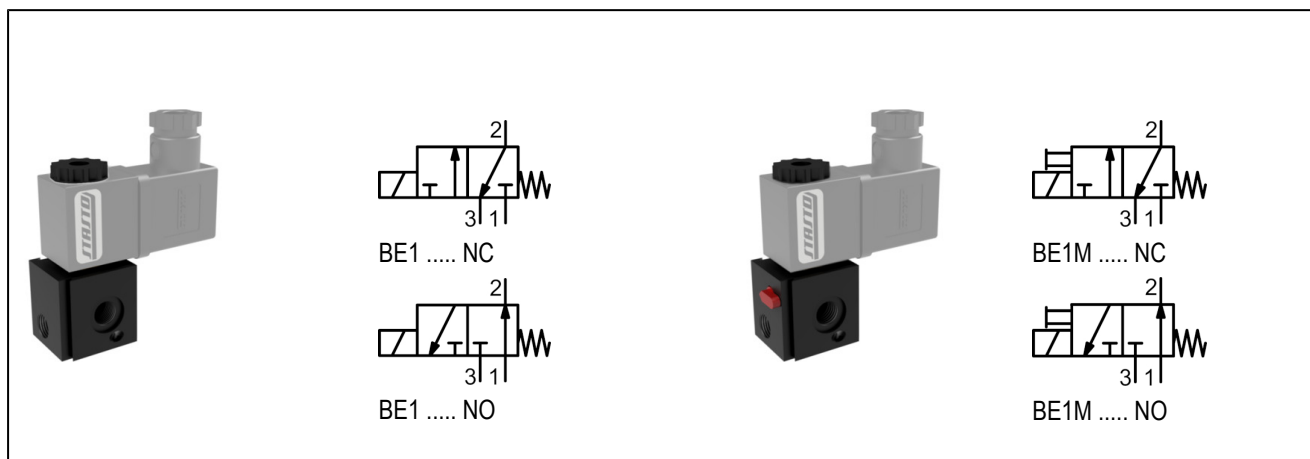


3/2-elektromagnetni razvodnik, G 1/8" serije BE

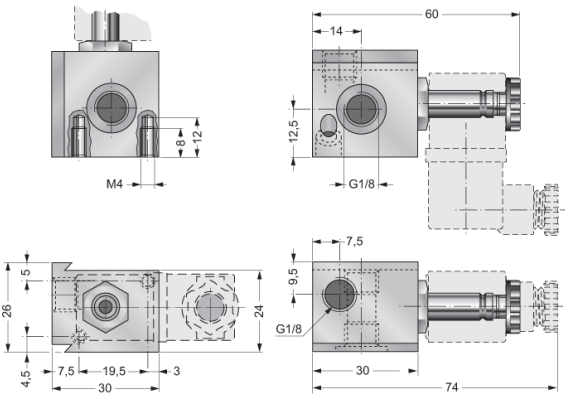
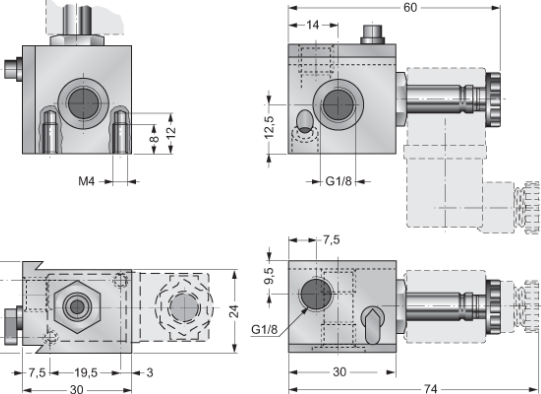
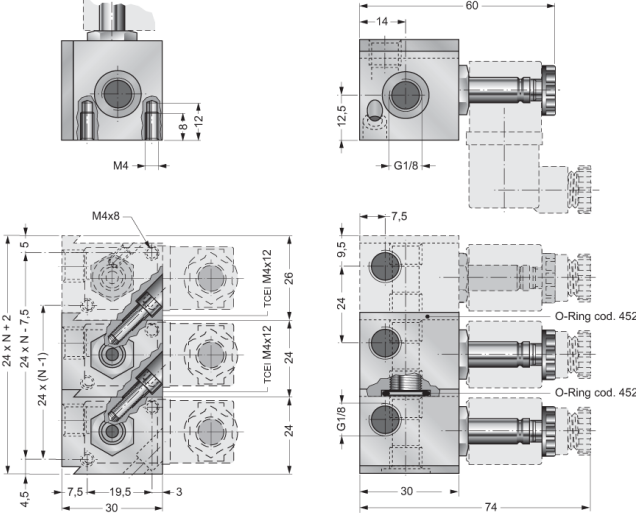
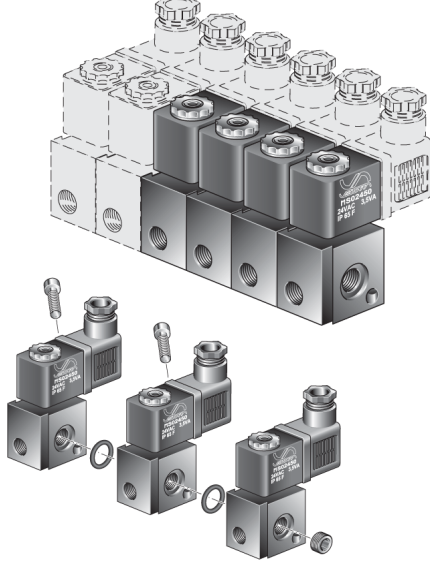


tip konstrukcije	3/2-elektromagnetni razvodnik, baterija ventila - proširenje opciono aktiviranje električno/opružno, opciono sa ručnim poništavanjem komande u slučaju nužde-samo za verziju NC
priključak	G 1/8" prema ISO228/1
materijali	telo aluminijum, zaptivke NBR
položaj montaže	bilo koji
medijum	prečišćen i zauljen ili nezauljen komprimovani vazduh
radni pritisak	nominalni otvor 1,2mm NC 0-10bar / NO 0-6bar nominalni otvor 1,5mm NC 0-6bar / NO na zahtev
protok	nominalni otvor 1,2mm 80NI/min, nominalni otvor 1,5mm 130NI/min
temperatura medija	0°C...+40°C
temperatura okoline	-10°C...+50°C
električni podaci:	
tip namotaja	tip C001 (standardni namotaj), veličina konektora 22mm tip EPC (namotaj za ATEX okolinu sa kablom dužine 3 m - samo za pojedinačne ventile)
električni priključak	konektor prema industriskom obrazcu B (videti poseban tehnički list)
standardni napon	230V/50-60Hz, 24V/50-60Hz / 12VDC, 24VDC / 48V/50-60Hz
posebni napon	115V/50-60Hz, više na zahtev
prihvatljiva tolerancija napona	± 10%
vreme rada	100% kontinualno uključenje
klasa zaštite	IP65 prema EN60529 (DIN 40050) sa ispravno namontiranim konektorom (zaštita od ulaska prašine i mlaza vode)
detalji:	
obim isporuke	konusni zavrtnj PL-BE i priključna garnitura KM-BE U slučaju porudžbine molim vas navedite vrstu struje i napon CAD- datoteke su dostupne na STASTO Store na www.stasto.eu



šifra tipa

BE	broj ventila	Ručna akcija u vanrednim slučajevima	nominalni otvor	NC	23050	230V/50-60Hz
1, 2, 3, ...	- bez		2 1,2 mm	NO	11050	115V/50-60Hz
	M sa		5 1,5 mm		02450	24V/50-60Hz
					02400	24VDC
					01200	12VDC



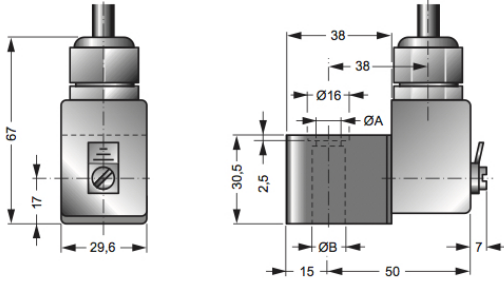
dimenzije

 BE 1 - ...	 BE 1M - ... (sa ručnim obustavljanjem u slučaju nužde)
 BE _ - ... (proširenje opciono))	

pribor

 GE navrtka za fiksiranje za namotaj sa otvorenom ventilacijom (standard)	 GE1 sa izlaznim radijalnim	 PL-BE čep za jedan ventil (BE 1...)	 KM-BE priključna garnitura
---	---	--	---

namotaji

		napon	klasa zaštite	potrošnja kod 20°C	tip
		24VDC / 48V / 50-60Hz	IP65	3W/5VA	C001-03
		24V/50-60Hz / 12VDC		5VA/3W	C001-04
		230V/50-60Hz		5VA	C001-22
		115V/50-60Hz		5VA	C001-23
		24VDC	Ex II 2G Ex mb IIC T5 Gb	3,0W	EPC02400
		24V/50-60Hz		3,2W	EPC02450
		110V/50-60Hz	Ex II 2D Ex mb tb IIIC T95°C IP66 Db	3,2W	EPC11050
		230V/50-60Hz		3,2W	EPC23050

ilustracije su samo za informaciju i bez obaveza
sve konstrukcije, konfiguracije, mere i materijali podležu promenama bez prethodne najave