


Multi-coupling Series COM



Design type	Multi-coupling, free passage
Connection	Push-in fittings 4mm, 6mm or rather 8mm
Materials	Housing glass fiber reinforced high-performance plastic, Seals NBR, Steel circlips, Push-in fittings brass nickel-plated
recommended Hose materials	Polyamide (PA), Polyurethane (CPU/PU), Polyethylene (PE)
Medium	Compressed air, neutral gases
Medium temperature	-20...+70°C
max. Operating pressure	15bar

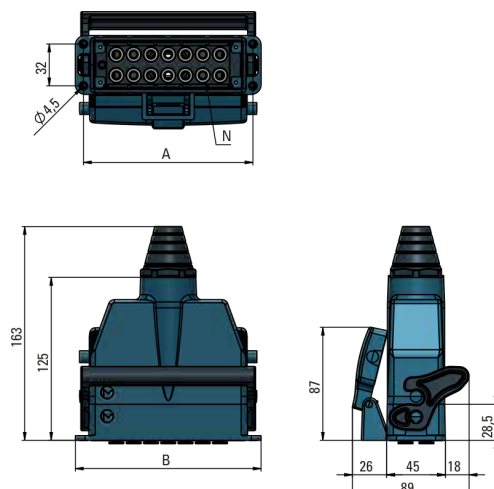

Hose diameter [mm]	N Number of couplings	A	B	Weight [g]	Type
4	12	103	115,5	612	C0M-PI12X04-N-A
4	20	129,5	142,5	825	C0M-PI20X04-N-A
6	10	103	115,5	718	C0M-PI10X06-N-A
6	14	129,5	142,5	923	C0M-PI14X06-N-A
8	8	103	115,5	656	C0M-PI8X08-N-A
8	10	129,5	142,5	801	C0M-PI10X08-N-A

Illustrations non-binding
Design, dimensional and material changes reserved

