



## blow gun - aluminum series S-26

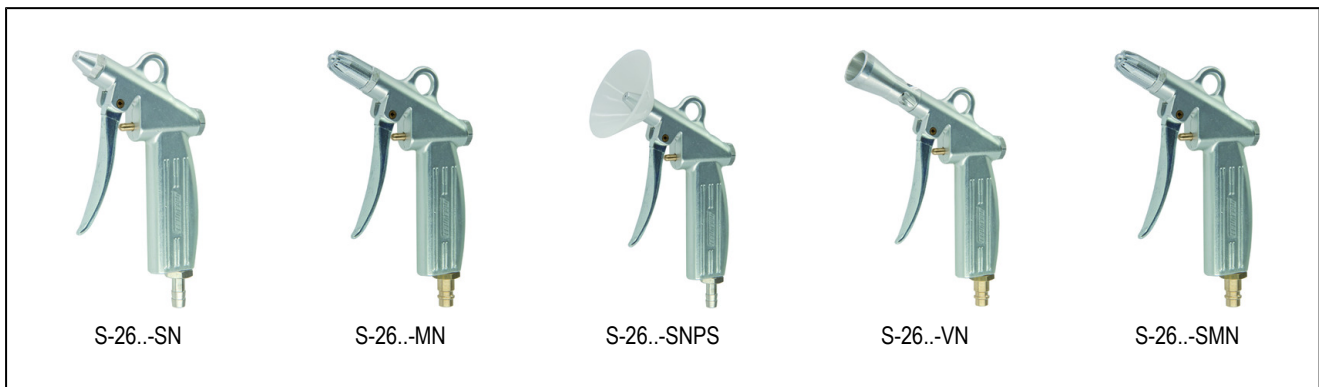

|                       |                                                                        |
|-----------------------|------------------------------------------------------------------------|
| connection            | blow gun: hose nozzle or standard coupling DN7,2<br>nozzle: M12 x 1,25 |
| material              | blow gun aluminum forged and anodized, nozzle aluminum, seals NBR      |
| medium                | compressed air                                                         |
| operating pressure    | 2...8bar, max. 10bar                                                   |
| operating temperature | -10...+50°C                                                            |
| actuation             | with hand lever, continuous air control by hand lever                  |
| accessories           | various nozzles, extensions and air connections available              |


### S-26..-SN blow gun with standard air-nozzle

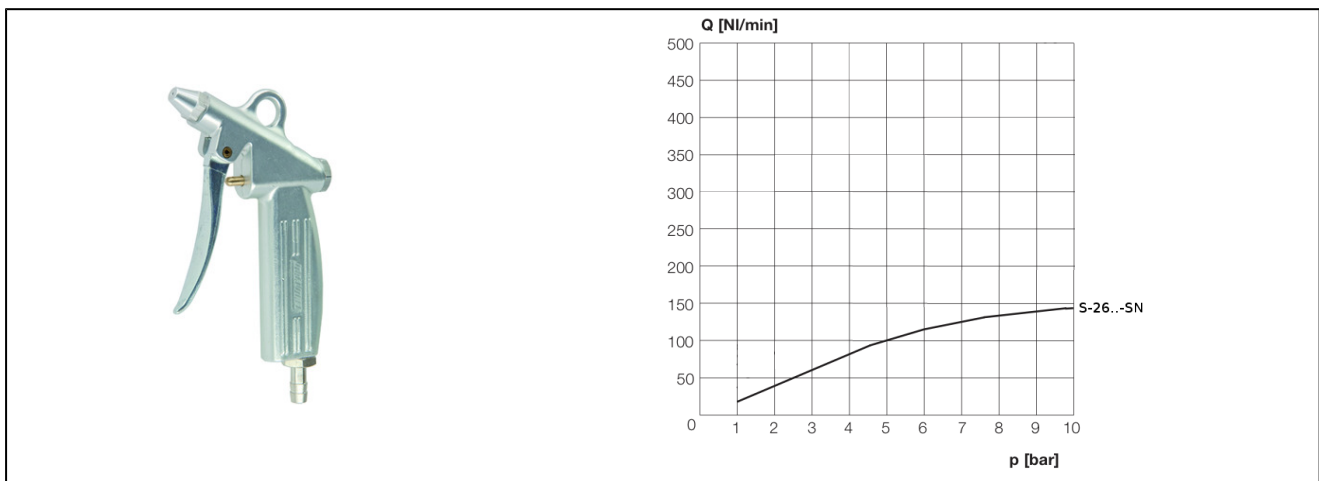

|                      |                                           |
|----------------------|-------------------------------------------|
| design               | blow gun with standard air-nozzle         |
| nozzle               | standard air-nozzle with central bore     |
| nozzle diameter      | Ø1,5mm                                    |
| blowing force        | at a distance of 100mm at 6bar 1,4N       |
| air consumption      | at 6bar 120NI/min                         |
| sound pressure level | noise at a distance of 1m at 6bar 82dB(A) |
| application          | sharp and high energy jet from nozzle     |

| connection                                            | type     |
|-------------------------------------------------------|----------|
| with hose fitting 6mm                                 | S-26A-SN |
| with hose fitting 9mm                                 | S-26B-SN |
| with hose fitting 13mm                                | S-26C-SN |
| with coupling plug for coupling DN7,2 (Euro-coupling) | S-26K-SN |

## S-26...MN blow gun with silent air-nozzle

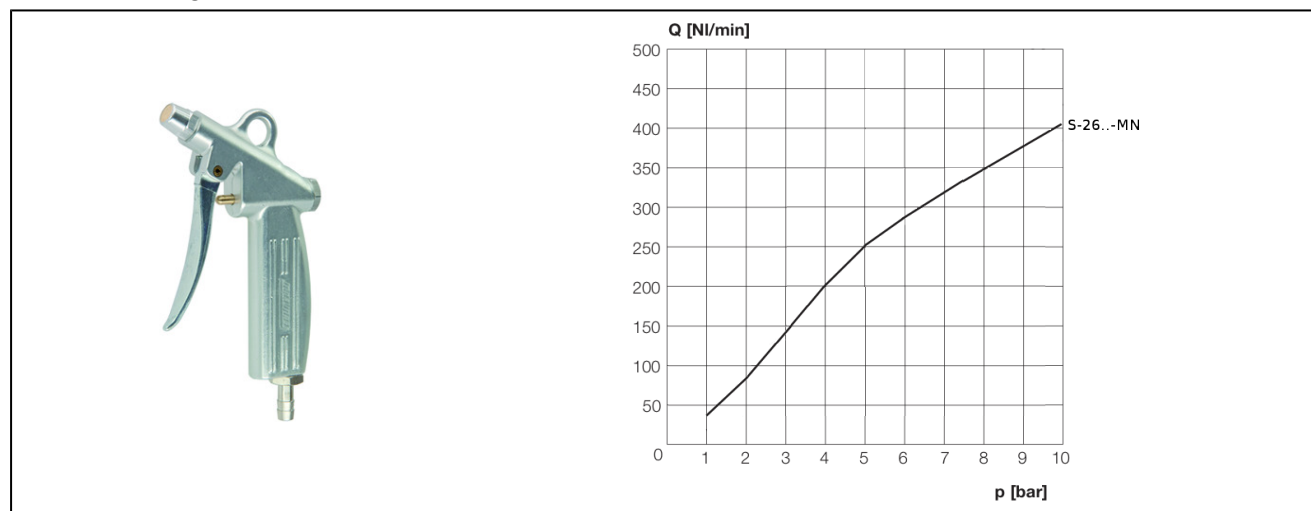

|                      |                                                  |
|----------------------|--------------------------------------------------|
| design               | blow gun with silent air-nozzle, extremely quiet |
| description          | noise-silencing nozzle                           |
| nozzle               | nozzle with sintered insert                      |
| blowing force        | at a distance of 100mm at 6bar 1,1N              |
| air consumption      | at 6bar 318NI/min                                |
| sound pressure level | noise at a distance of 1m at 6bar 65dB(A)        |
| application          | wide but small energy jet, noise-reducing design |

| connection                                            | type     |
|-------------------------------------------------------|----------|
| with hose fitting 6mm                                 | S-26A-MN |
| with hose fitting 9mm                                 | S-26B-MN |
| with hose fitting 13mm                                | S-26C-MN |
| with coupling plug for coupling DN7,2 (Euro-coupling) | S-26K-MN |

## S-26..-SNPS blow gun, nozzle with protective shield



|                      |                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------|
| design               | blow gun, nozzle with protective shield                                                               |
| nozzle               | nozzle with protection shield between nozzle and gun                                                  |
| nozzle diameter      | Ø1,5mm                                                                                                |
| blowing force        | at a distance of 100mm at 6bar 1,4N                                                                   |
| air consumption      | at 6bar 120NI/min                                                                                     |
| sound pressure level | noise at a distance of 1m at 6bar 82dB(A)                                                             |
| application          | avoidance of eye injuries caused by chips, prevention of particles rebound, slightly dampening effect |

| connection                                            | type       |
|-------------------------------------------------------|------------|
| with hose fitting 6mm                                 | S-26A-SNPS |
| with hose fitting 9mm                                 | S-26B-SNPS |
| with hose fitting 13mm                                | S-26C-SNPS |
| with coupling plug for coupling DN7,2 (Euro-coupling) | S-26K-SNPS |


## S-26..-VN blow gun with stream nozzle (venturi nozzle)



|                      |                                                                           |
|----------------------|---------------------------------------------------------------------------|
| design               | blow gun with stream nozzle (venturi nozzle)                              |
| blowing force        | at a distance of 100mm at 6bar 3,1N                                       |
| air consumption      | at 6bar 336NI/min                                                         |
| sound pressure level | noise at a distance of 1m at 6bar 93dB(A)                                 |
| application          | wide jet with high air output by injector, recommended pressure max. 2bar |

| connection                                            | type     |
|-------------------------------------------------------|----------|
| with hose fitting 6mm                                 | S-26A-VN |
| with hose fitting 9mm                                 | S-26B-VN |
| with hose fitting 13mm                                | S-26C-VN |
| with coupling plug for coupling DN7,2 (Euro-coupling) | S-26K-VN |

## S-26...SMN blow gun with safety and silent air nozzle

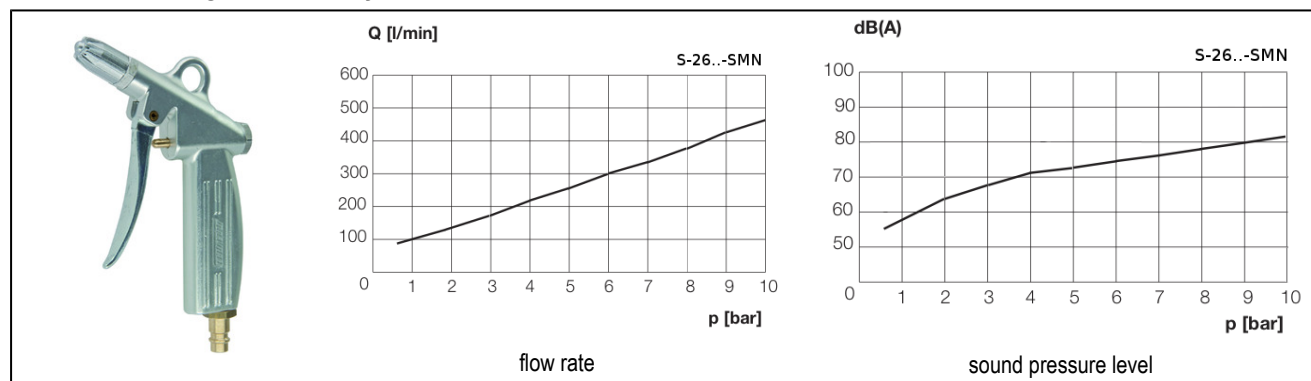

|                      |                                                                                                                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| design               | blow gun with silent air-nozzle, extremely quiet                                                                                                                                           |
| description          | combined safety and noise-silencing nozzle, full cone nozzle ensure effective concentric blowing, blowing up to 2.5 times higher as a classic air pistol with standard nozzle (S-26...-SN) |
| blowing force        | at a distance of 100mm at 6bar 3N                                                                                                                                                          |
| air consumption      | at 6bar 300NI/min                                                                                                                                                                          |
| sound pressure level | noise at a distance of 1m at 6bar 77dB(A)                                                                                                                                                  |
| application          | significant noise reduction, avoidance of danger in dealing with compressed air, particularly for direct skin contact                                                                      |

| connection                                            | type      |
|-------------------------------------------------------|-----------|
| with hose fitting 6mm                                 | S-26A-SMN |
| with hose fitting 9mm                                 | S-26B-SMN |
| with hose fitting 13mm                                | S-26C-SMN |
| with coupling plug for coupling DN7,2 (Euro-coupling) | S-26K-SMN |

illustrations are non-binding

all designs, configurations, measurements and materials are subject to change without prior notice