

Aluminium tube Series SPEEDLINE




Base material	Aluminium with surface coating (corrosion-resistant), external Polyester powder-coated
Operating pressure	Vacuum up to Nominal pressure according to table and pressure-temperature diagram
Color	blue RAL5012, grey and green on request


Dimensions

Tube outside diameter [mm]	Inner tube diameter [mm]	PN [bar]	Tube length [m]	Color	Type
16	14	16	4	blue	AL-16/14-BU-4-R
20	17,4	16	5,8	blue	AL-20/17,4-BU-5,8-R
25	22,2	16	5,8	blue	AL-25/22,2-BU-5,8-R
32	29	16	5,8	blue	AL-32/29-BU-5,8-R
40	36,4	16	5,8	blue	AL-40/36,4-BU-5,8-R
50	46	16	5,8	blue	AL-50/46-BU-5,8-R
63	59	16	5,8	blue	AL-63/59-BU-5,8-R
80	75,2	16	5,8	blue	AL-80/75,2-BU-5,8-R
110	104,4	16	5,8	blue	AL-110/104,4-BU-5,8-R
168,3	161,3	16	5,8	blue	AL-168,3/161,3-BU-5,8-R

Pressure-temperature diagram in conjunction with SPEEDLINE fittings PA6

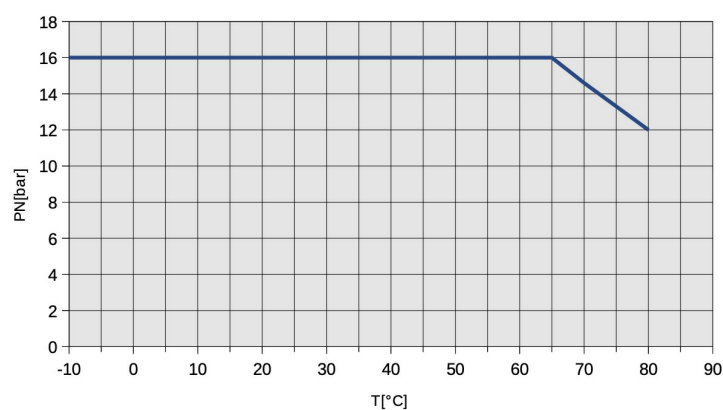

Pressure-temperature diagram in conjunction with SPEEDLINE fittings Aluminium

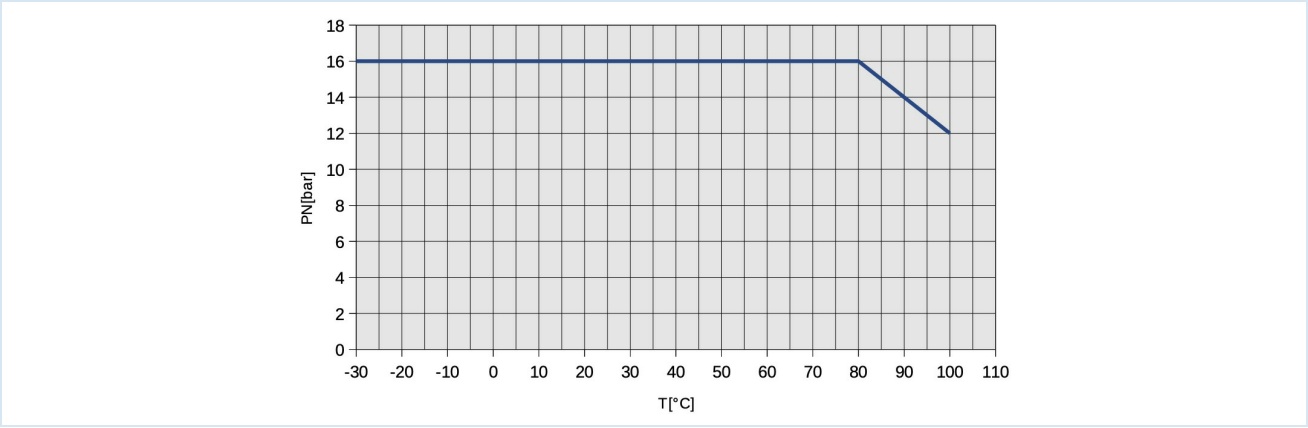

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Fittings and couplings / Compressed air system SPEEDLINE / Compressed air system SPEEDLINE Ø16...63mm / Aluminum pipe Series SPEEDLINE