


Compressed air tank Series AT02



Design type	Buffer tank according to 2014/29 EU with drain ports
Materials	Housing Steel painted
Application range	Only as a buffer tank in such a way that the tank is connected to the pressure generator without shut-off capability. Otherwise, a safety valve must be provided.
Storage medium	Compressed air, Argon, other media on request
Medium temperature	-10...+100°C
Permissible operating pressure	11bar
Mounting type	via 4 through-holes in the brackets
Mounting position	horizontal

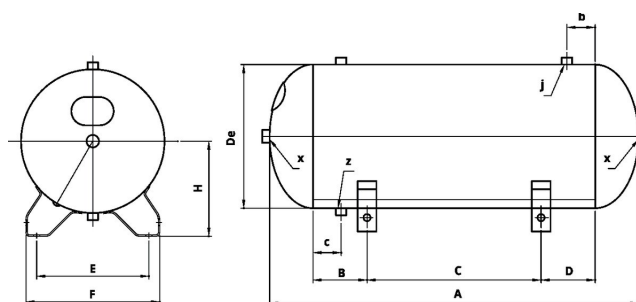

Contents [Litre]	A	B	C	D	E	F	H	De	b	c	j	x	z	Weight [approx. kg]	Type
10	506	105	240	66	172	202	114,5	169	66	49	G3/8"	G1"	G3/8"	8	AT02-10-11-01
15	522	96	240	74	172	205	135	196	67	64	G3/8"	G1"	G3/8"	9	AT02-15-11-01
24	592	50	290	110	180	235	165	240	34	94	G3/8"	G1"	G3/8"	10	AT02-24-11-01
50	766	114	420	66	240	290	188,5	286	59	59	G1/2"	G1"	G1/2"	19	AT02-50-11-01
100	1115	95	700	80	310	356	243	350	51,5	51,5	G1/2"	G2"	G1/2"	28	AT02-100-11-01

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Hoses, Tubes, Manometer and accessories / Compressed air tank / Compressed air tank Series AT02

