


Non-return valve in inline design made of brass Series 227



Design type	Poppet valve spring-loaded
Actuation type	hydraulic, pneumatic
Connection	G1/4"...G1" after ISO228/1
Materials	Housing Brass CW614N, Spring Stainless steel 1.4301, Seal FKM
Application range	gaseous and liquid media that do not attack the materials used
Medium temperature	-10...+180°C
Flow direction	in Free in arrow direction, blocked in opposite direction
Mounting type	Installation in rigid piping system
Mounting position	any

Dimensions

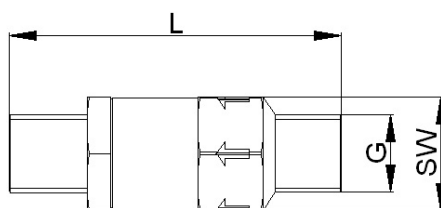

G	L	SW	Operating pressure range [bar]	Weight [approx. kg]	Type
G1/4"	53,5	19	0,4...16	0,07	227.10
G3/8"	54	19	0,4...16	0,08	227.11
G1/2"	66	24	0,4...16	0,16	227.12
G3/4"	77	36	0,1...16	0,40	227.13
G1"	84	46	0,1...16	0,62	227.14

Illustrations non-binding

Design, dimensional and material changes reserved

Armatures / Pressure regulators, safety valves and accessories / Check valves / Axial type check valve Series 227

