



Axial check valve stainless steel Series VX23



Design type	Poppet valve spring-loaded
Actuation	hydraulic, pneumatic
Connection	G1/8" and G1/4" according to ISO228/1
Materials	Valve body and disc stainless steel 1.4404, Stainless steel spring 1.4310, Seal FKM
Medium temperature	-10...+150°C
Mounting type	Installation in rigid piping system
Mounting position	any
Flow direction	free in the direction of the arrow, blocked in the opposite direction
Application range	gaseous and liquid media that do not attack the materials used

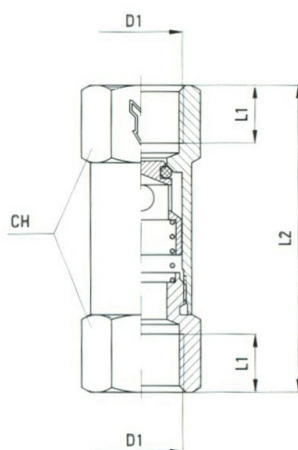

Connection D1	Pressure range [bar]	L1	L2	CH	Weight [approx. g]	Type
G1/8"	0,2-10	8	40	13	26	VX230018
G1/4"	0,2-10	9	48	16	38	VX230014
G3/8"	0,2-10	10,5	51	21	79	VX230038
G1/2"	0,2-10	12,5	62	24	123	VX230012

Illustrations non-binding

Design, dimensional and material changes reserved

Armatures / Pressure regulators, safety valves and accessories / Check valves / Axial type check valve Series VX23

