


pressure regulator 1" series R




design	diaphragm pressure regulator with relieving
connection	G1" according to ISO228/1
materials	body acetal resin (POM), threaded connections brass, seals NBR
function	control of outlet pressure
type of fixing	installation in a pipe system or wall mounting with mounting bracket
mounting position	any
medium	filtered and lubricated or non lubricated compressed air
medium temperature	+5...+50°C
ambient temperature	+5...+50°C
inlet pressure	max. 12,5bar
adjustment ranges	see "order code"
flow direction	is marked by an arrow
scope of supply	including manometer Ø50mm

order code


		R - 10 - 04 - R		
connection	1"	10		
pressure range	0,5...4bar		04	
	0,5...8bar		08	
	0,5...12bar		12	
relieving	with relieving			R

dimensions

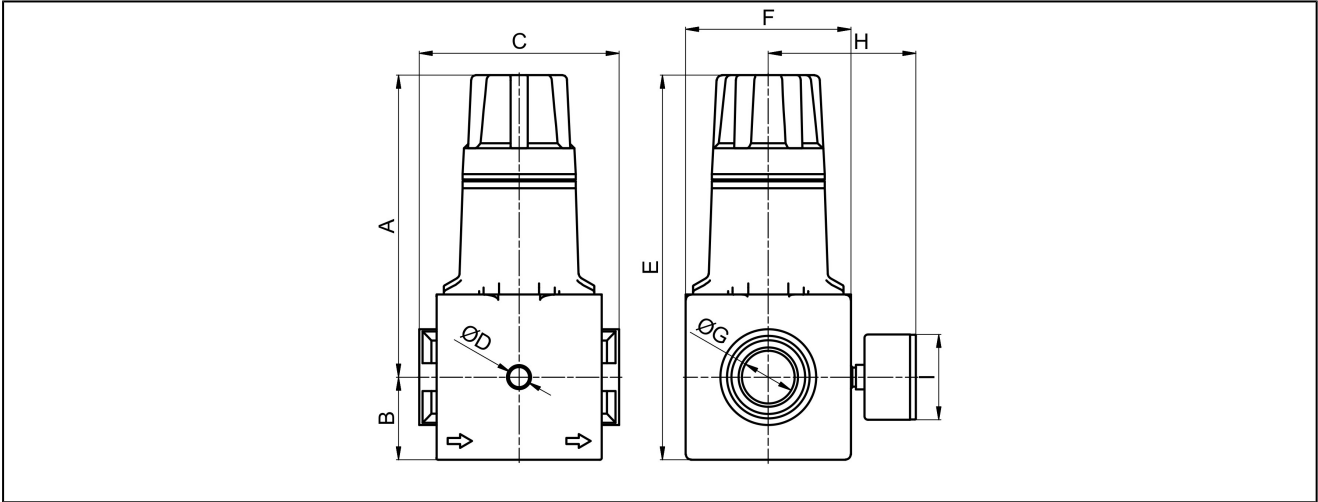


connection G	A	B	C	D	E	F	H	I	weight [app. kg]	type
G1"	173,5	47,5	115	G1/4"	221	95	~85	50	1,83	R-10-...-R


flow diagram

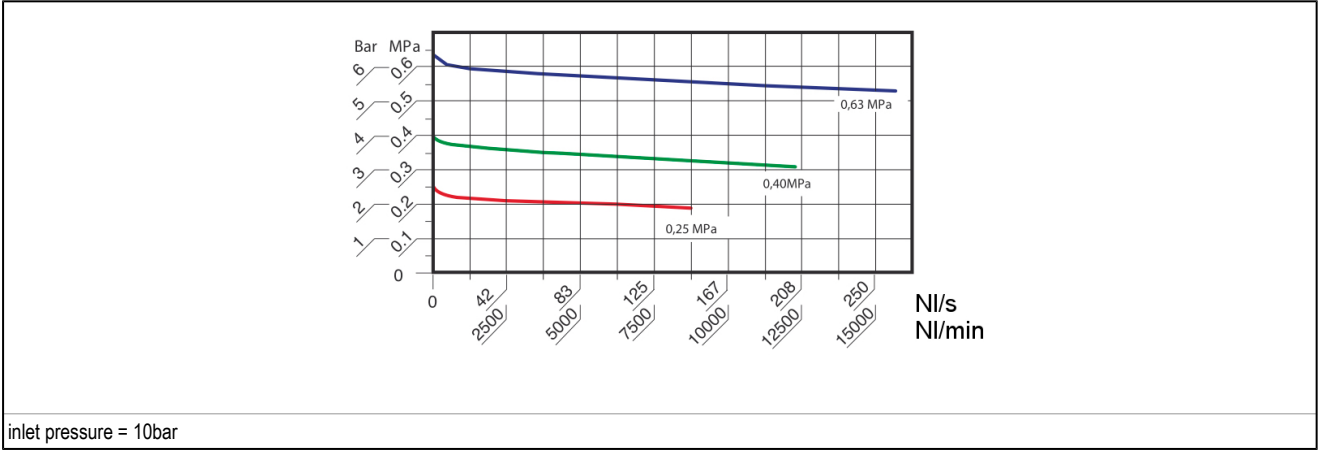

control characteristic

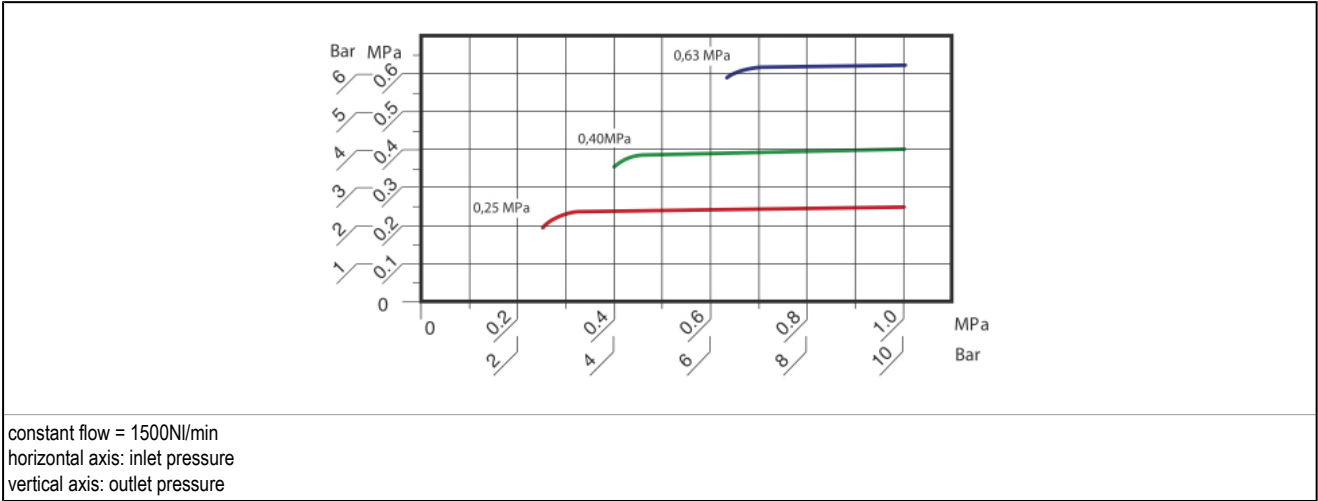

accessories

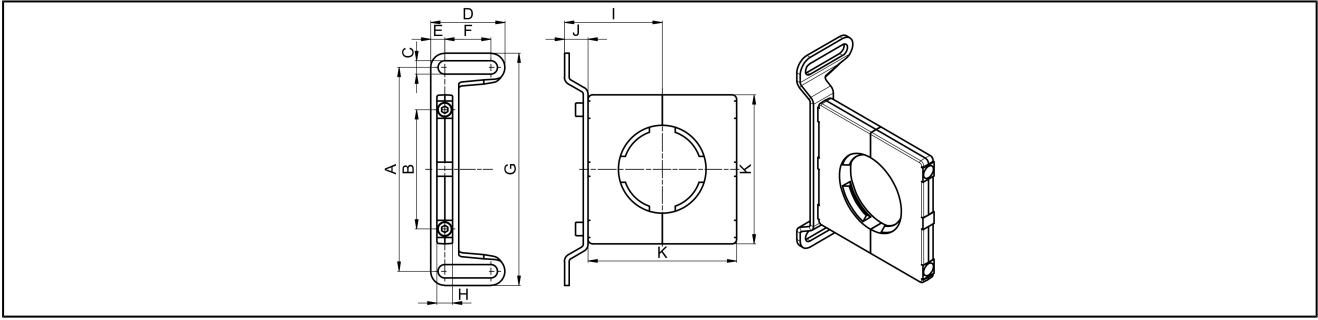

A	B	C	D	E	F	G	H	I	J	K	type
130	76	8,5	47,5	9	29,5	148	10	62,5	15	95	K-WBF-A

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice