Partnership. With Guarantee.

Filter regulator
Series Gold FR04

Plastic reservoir

Protective cage

Metal container



Design type	Diaphragm pressure regulator with secondary venting, Centrifugal force principle filter, Sintered filter element Drain valve: Filter regulator with plastic bowl or rather with protective cage semi-automatic drain valve, with metal bowl Manual drain valve
Connection	G3/4"...G1" according to ISO228/1
Materials	Housing Zinc die casting, Condensate reservoir Polycarbonate or Metal, Seals NBR
Function	Control of secondary pressure and filtration of compressed air
Filter element	40µm
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	vertical, Drain valve bottom
Medium	Compressed air
Medium temperature	with plastic bowl 0...+60°C, with metal bowl 0...+60°C (with appropriately conditioned compressed air -20...+60°C)
Ambient temperature	with plastic bowl 0...+60°C, with metal bowl -20...+60°C
Inlet pressure	1,5...16bar or rather 1,5...25bar loud table, with automatic drain valve 1,5...16bar
Control ranges	0,5...10bar and 0,5...16bar with metal bowl (0,5...3/ 0,5...6 on request)
Flow direction	is marked by an arrow
Scope of delivery	including pressure gauge

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Type code

		FR04 - 34 H - 0,5/10 - P - A
	3/4"	34
Connection	1"	10
Flow rate	high flow rate	H
Pressure range	0,5...3bar	0,5/3
	0,5...6bar	0,5/6
	0,5...10bar	0,5/10
	0,5...16bar	0,5/16
Reservoir	Plastic reservoir (Leave blank)	
	Plastic reservoir with protective cage	P
	Metal container	M
Drain valve	semi-automatic drain valve (Leave blank)	
	automatic drain valve	A1

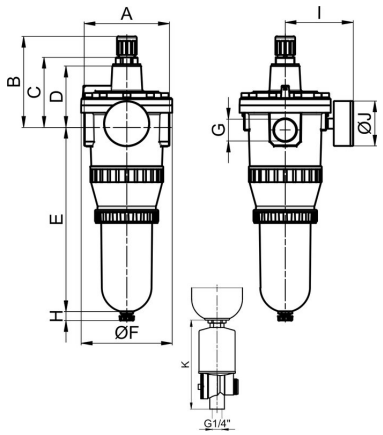

Connection G	A	B	C	D	E	ØF	H	I	ØJ	K	Weight [approx. kg]	Type
G3/4"	129	129	100	88	250	125	13	93	63	104	3,1	FR04-34H-0,5/10
G3/4"	129	129	100	88	250	125	13	93	63	104	3,3	FR04-34H-0,5/10-P
G3/4"	129	129	100	88	250	125	13	93	63	104	3,2	FR04-34H-0,5/10-M
G1"	117	129	100	88	250	125	13	93	63	104	3,0	FR04-10H-0,5/10
G1"	117	129	100	88	250	125	13	93	63	104	3,2	FR04-10H-0,5/10-P
G1"	117	129	100	88	250	125	13	93	63	104	3,1	FR04-10H-0,5/10-M

Connection	Flow rate* [Nl/min]	max. inlet pressure [bar]	Pressure range [bar]	Type
G3/4"	12000	16	0,5...10	FR04-34H-0,5/10-P
G3/4"	12000	25	0,5...16	FR04-34H-0,5/10-M
G1"	12000	16	0,5...10	FR04-10H-0,5/10
G1"	12000	16	0,5...10	FR04-10H-0,5/10-P
G1"	12000	25	0,5...16	FR04-10H-0,5/10-M

*Flow rate data at inlet pressure of 8bar, outlet pressure of 6bar and 1bar Pressure drop

+43 512 52076
austria@stasto.eu

© STASTO Automation KG

Flow diagram



Accessories

Designation	Type
Holding angle	MMP04-34/112

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG