



Lubricator G1/4" and G1/2" Series L3



Design type	Fog lubricator made of stainless steel, without sight glass
Connection	G1/4" and G1/2" according to ISO228/1
Materials	Housing and reservoir Stainless steel 1.4404, Seals NBR
Function	Enrichment of compressed air with oil
Mounting type	Installation in piping system
Mounting position	vertical, Oil reservoir downward
Medium	filtered compressed air
Medium temperature	0 to +60°C (with appropriately conditioned compressed air -20 to +60°C)
Ambient temperature	-20 to +60°C
Inlet pressure	max. 50 bar
Oil metering	1-2 drops per minute, at flow through the device
recommended oil	after ISO VG 32, STASTO pneumatic oil HP32A or rather NR32
Flow direction	is marked by an arrow
Special version	Seals FKM



Dimensional drawing

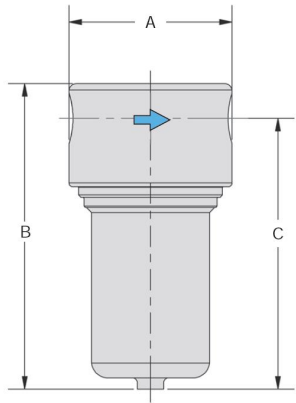

Connection	A	B	C
G1/4"	65	173	129
G1/2"	80	167	121

Connection	Flow rate at 6 bar [Nl/min]	max. Inlet pressure [bar]	Type
G1/4"	900	50	L3000-02
G1/2"	2400	50	L3000-04

Illustrations non-binding
Design, dimensional and material changes reserved

