


protočni ventili - ručni serije PGI, PF, PFF i SR



PGI .. 4



PF .. 4






PFF .. 4





SR .. 4

tip konstrukcije	ventil sa sedištem, ručni
priključak	4mm utisni priključak
nominalni otvor	2,5mm
opseg pritiska	2...10bar
protok	60NI/min
radna snaga	6N na 6bara
medijum	prečišćen i zauljen ili nezauljen komprimovani vazduh
temperatura medija	0...+40°C
temperatura okoline	-10...+50°C
informacija	CAD- datoteke su dostupne na STASTO Store na www.stasto.eu





PGI .. 4 taster/opruga za pokretanje

		funkcija	boja dugmadi	tip
		3/2 razvodnik NC	crno	PGI304
		3/2 razvodnik NC	crveno	PGI304R
		3/2 razvodnik NO	crno	PGI314
		3/2 razvodnik NO	crveno	PGI314R
		2/2-kraki NC	crno	PGI204
		2/2-kraki NC	crveno	PGI204R

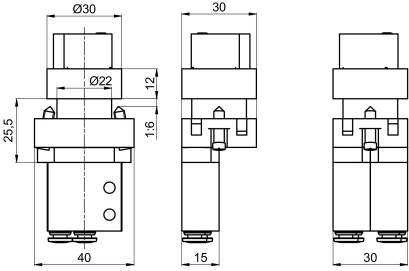




PF .. 4 pokretanje opruge pečurkastog dugmeta

		funkcija	boja dugmadi	tip
		3/2 razvodnik NC	crveno	PF304
		3/2 razvodnik NO	crveno	PF314
		2/2-kraki NC	crveno	PF204

PFF .. 4 pokretanje pečurkastog dugmeta/blokada

		funkcija	boja dugmadi	tip
		3/2 razvodnik NC	crveno	PFF304
		3/2 razvodnik NO	crveno	PFF314
		2/2-kraki NC	crveno	PFF204

SR .. 4 ručica za pokretanje/blokiranje

		funkcija	tip
 2/2-kraki und 3/2 razvodnik 5/2-kraki		3/2 razvodnik NC	SR304
		3/2 razvodnik NO	SR314
		2/2-kraki NC	SR204
		5/2-kraki	SR504

ilustracije su samo za informaciju i bez obaveza
sve konstrukcije, konfiguracije, mere i materijali podležu promenama bez prethodne najave