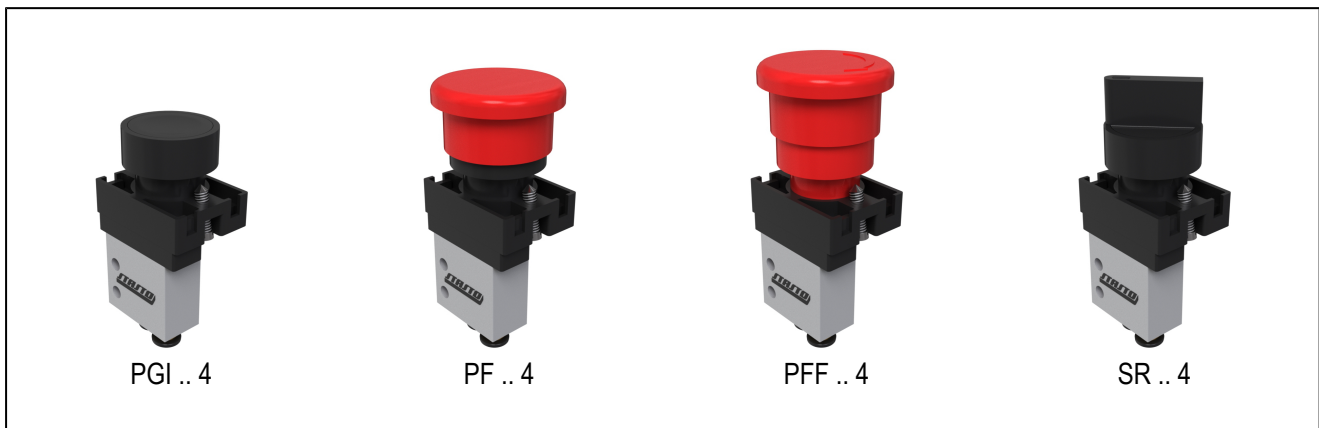









way valves - manually operated series PGI, PF, PFF and SR

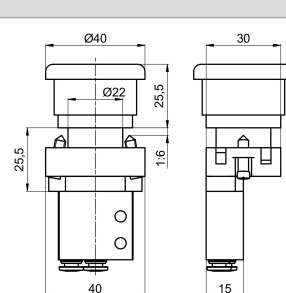




design	seat valve, manually operated
connection	4mm push-in fitting
nominal diameter	2,5mm
pressure range	2...10bar
flow rate	60NI/min
operating force	6N at 6bar
medium	filtered and lubricated or non lubricated compressed air
medium temperature	0...+40°C
ambient temperature	-10...+50°C
information	CAD files are available on the STASTO Store under www.stasto.eu

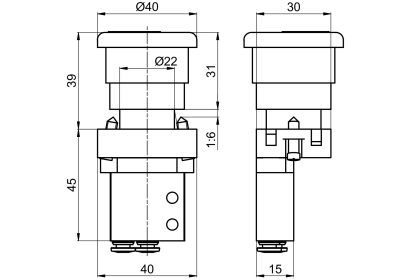



PGI .. 4 actuation pushbutton/spring

	function	button colour	type
		black	PGI304
		red	PGI304R
		black	PGI314
		red	PGI314R
		black	PGI204
		red	PGI204R

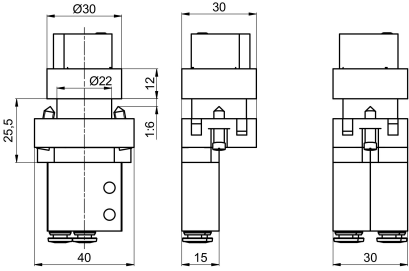




PF .. 4 actuation of mushroom push button/spring

	function	button colour	type
		red	PF304
		red	PF314
		red	PF204

PFF .. 4 actuation of mushroom push button/locking

		function	button colour	type
 2/2-way und 3/2-way 5/2-way		3/2-way NC	red	PFF304
		3/2-way NO	red	PFF314
		2/2-way NC	red	PFF204

SR .. 4 actuation handle/locking

		function	type
 2/2-way und 3/2-way 5/2-way		3/2-way NC	SR304
		3/2-way NO	SR314
		2/2-way NC	SR204
		5/2-way	SR504

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice