Partnership. With Guarantee.

Solenoid coil ATEX
Series EPC

Sheathing	Thermoplastic
Electrical connection	Connection cable 3m
Standard voltage	24VDC, 230V/50-60Hz, 24V/50-60Hz
Special voltages	12VDC, 110V/50-60Hz, further on request
Permissible voltage fluctuation	± 10%
Duty cycle	100% (Continuous operation)
Ambient temperature	-50...+50°C
Approvals	ATEX Ex II 2G Ex mb IIC T5 Gb, Ex II 2D Ex mb tb IIIC T95°C IP66 Db

Technical data

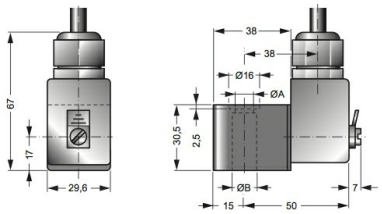

Voltage	Power consumption at 20°C	Type
12VDC	3W	EPC01200
24VDC	3W	EPC02400
24V/50-60Hz	3,2VA	EPC02450
110V/50-60Hz	3,2VA	EPC11050
230V/50-60Hz	3,2VA	EPC23050

Illustrations non-binding
Design, dimensional and material changes reserved

Version 7
140183 / Generated 2026/33 EN
MADE IN EUROPE

+43 512 52076
austria@stasto.eu
© STASTO Automation KG