


Brass ball valves Series 4904



Design type	Shut-off valve with floating ball, reduced passage, with Hose nozzle
Connection	G1/2"... G1" according to ISO228/1
Materials	Body Brass CW617N chrome-plated, Ball brass CW617N hard chrome-plated, Ball seal PTFE, Spindle seal NBR, Hand lever aluminium black coated
Mounting type	Installation in rigid piping system
Mounting position	any
Application range	Gases and liquids of group 2 according to PED 2014/68/EU that do not attack the materials used.
Medium temperature	-20... +90°C
Operating pressure	Vacuum max. 1mbar up to Rated pressure according to table
Actuation	by 90° rotation of the hand lever

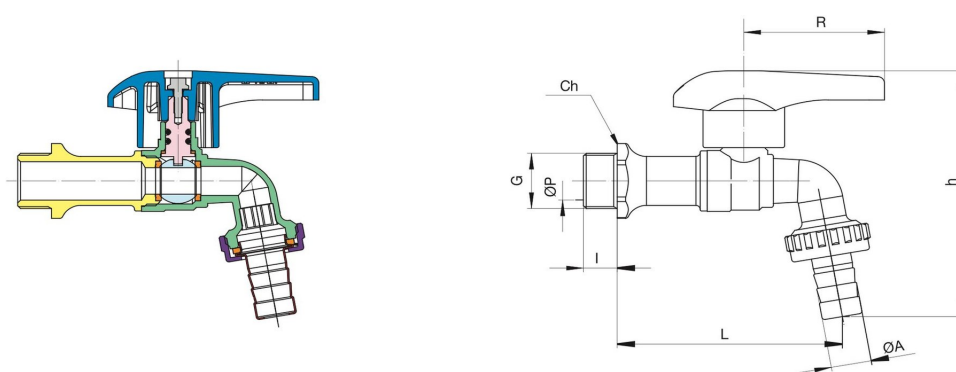

Connection	Nominal size DN[mm]	PN [bar]	Ch	h	I	L	R	P	A	Weight [approx. kg]	Type
G3/8"	10	30	25	92,5	12	79	50	10	15,5	0,21	4904-3/8"
G1/2"	15	30	25	92,5	12	80	50	10	15,5	0,21	4904-1/2"
G3/4"	20	30	30	105	15	92	50	12	20,5	0,30	4904-3/4"
G1"	25	30	38	117,5	18	100	50	15	25,5	0,50	4904-1"

Illustrations non-binding



