


Stainless steel flanged ball valves With pneumatic rotary actuator Series BADA-...-SSTV



Design type	Actuator: piston actuator with 2 opposed pistons, elastic sealing, actuator in all details in accordance with ISO 5211 or according to NAMUR recommendations, End positions adjustable on both sides $\pm 5^\circ$
Connection	Flanges DN15...DN150 according to EN1092 PN16
Materials Standard version	Actuator: Hard anodized aluminium, Pinion, nickel-plated steel, Piston guide POM, Seals NBR Ball valve: Body and ball stainless steel 1.4401, Seals PTFE/FKM
Function	available in double-acting or single-acting version
Mounting type	Installation in rigid piping system
Mounting position	any
Control medium	filtered and lubricated or non-lubricated compressed air
Application range	gaseous and liquid media that do not attack the materials used
Medium temperature	$-20^\circ\text{C} \dots +160^\circ\text{C}$
Ambient temperature	$-20^\circ\text{C} \dots +85^\circ\text{C}$
Control pressure	5,5...8 bar, Adaptation to lower pilot pressures possible on request
Operating pressure	0 bar up to Operating pressure according to table and pressure-temperature diagram, suitable for rough vacuum
Special version	Ball valve: ATEX EX II 2G Ex h IIC T6...T1 Gb / II 2D Ex h IIIC T85°C...T450°C Db, Actuator: ATEX EX II 2G Ex h IIC T6...T3 Gb / II 2D Ex h IIIC T85°C...T200°C Db Stainless steel pinion, Ambient temperatures $-40 \dots +85^\circ\text{C}$, or rather $-20 \dots +150^\circ\text{C}$
Accessories	assembled manual, pneumatic or electric control valve electrical end position feedback, Positioner in I/P or P/P version Adjustment of the switching speed
Ordering note	When ordering, please also specify pilot pressure, operating medium, operating pressure and operating temperature.
Application note	The pressure and temperature specifications are maximum values for normal conditions, for lubricating or non-degreasing media. Degreasing media in particular reduce the specified values and increase the required torque. For these special cases, we recommend prior consultation. When selecting the valve, the lowest control pressure occurring in the system must be taken as the basis.



Dimensions

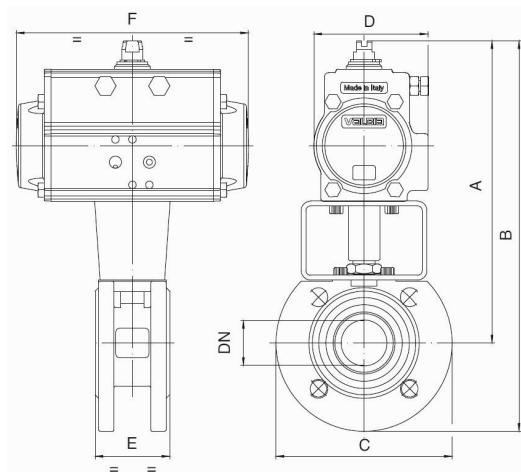

Ball valves with double-acting rotary actuator

Nominal size DN[mm]	max. operating pressure [bar] up to 85°C	A	B	C	D	E	F	Actuator type	Kv value [m³/h]	Weight [approx. kg]	Type
15	16	183	228	90	71	35	141	PAD052	19,2	3,3	BADA-015-SSTV-D0
20	16	188	238	100	71	40	141	PAD052	35	4,1	BADA-020-SSTV-D0
25	16	201	259	115	71	46	141	PAD052	64,5	5,6	BADA-025-SSTV-D0
32	16	200	270	140	71	54	141	PAD052	103,8	6,2	BADA-032-SSTV-D0
40	16	227	302	150	81	64	164	PAD063	174	9,1	BADA-040-SSTV-D0
50	16	253	336	165	95	82	210	PAD075	301,3	14,3	BADA-050-SSTV-D0
65	16	285	378	185	106	103	241	PAD085	545,7	19,6	BADA-065-SSTV-D0
80	16	292	392	200	106	122	241	PAD085	872,5	27,1	BADA-080-SSTV-D0
100	16	341	451	220	123	152	275	PAD100	1363	48,7	BADA-100-SSTV-D0
125	16	398	523	250	137	196	333	PAD115	2360	73	BADA-125-SSTV-D0
150	16	435	577	285	148	232	372	PAD125	3671	123,8	BADA-150-SSTV-D0


Ball valves with single-acting rotary actuator

Nominal size DN[mm]	max. operating pressure [bar] up to 85°C	A	B	C	D	E	F	Actuator type	Kv value [m³/h]	Weight [approx. kg]	Type
15	16	195	239	90	81	35	164	PAS0635	19,2	3,9	BADA-015-SSTV-S0
20	16	200	250	100	81	40	164	PAS0635	35	4,1	BADA-020-SSTV-S0
25	16	207	265	115	81	46	164	PAS0635	64,5	4,9	BADA-025-SSTV-S0
32	16	244	319	140	106	54	241	PAS0855	103,8	8,9	BADA-032-SSTV-S0
40	16	259	334	150	106	64	241	PAS0855	174	9,5	BADA-040-SSTV-S0
50	16	281	363	165	123	82	275	PAS1005	301,3	13,6	BADA-050-SSTV-S0
65	16	352	445	185	137	103	333	PAS1155	545,7	24,8	BADA-065-SSTV-S0
80	16	371	471	200	148	122	372	PAS1255	872,5	28,3	BADA-080-SSTV-S0
100	16	387	497	220	148	152	372	PAS1255	1363	35,7	BADA-100-SSTV-S0
125	16	454	581	250	187	196	500	PAS1605	2360	70,5	BADA-125-SSTV-S0
150	16	538	681	285	217	232	579	PAS2005	3671	137,8	BADA-150-SSTV-S0

Single-acting actuators are supplied spring-closing (NC) unless otherwise ordered.



Pressure-temperature diagram

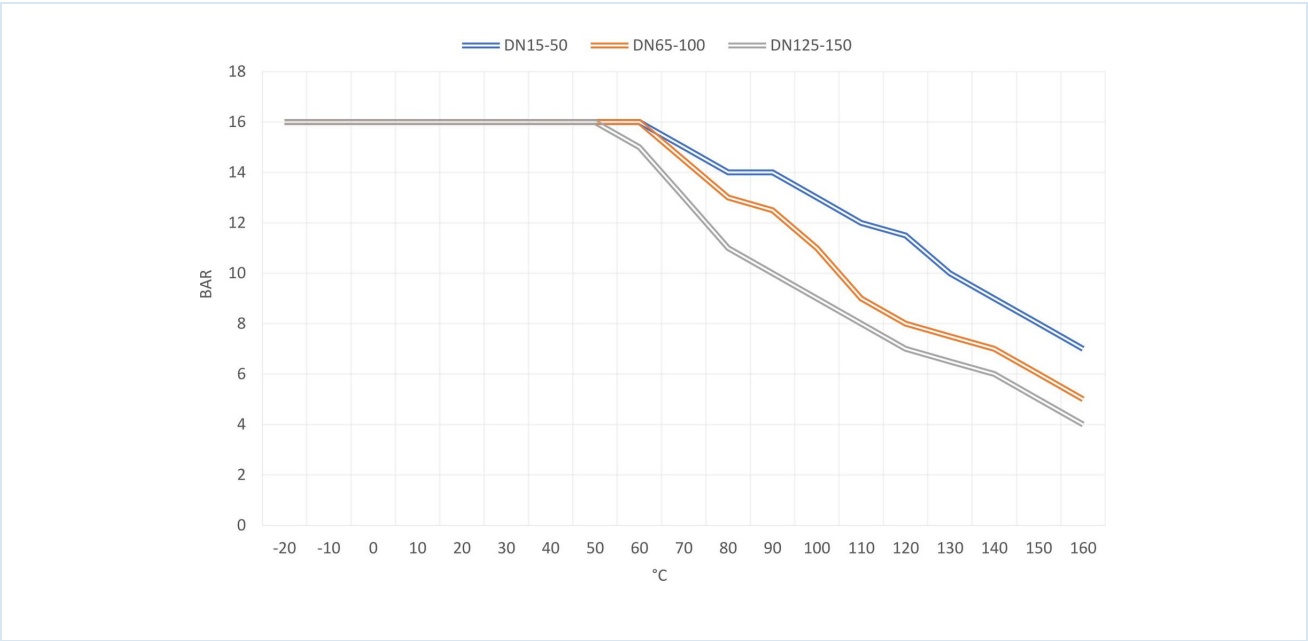

Illustrations non-binding
Design, dimensional and material changes reserved

Armatures / Ball valves - automatically operated / Flanged ball valves - pneumatically operated / Flanged ball valve with pneumatic actuator Series BADA