



5/3-Vejs skydeventil, 1/8"...1/2" Serie K53P2




K53P2318




K53P2618




K53P2918



K53P2314, K53P2312



K53P2614, K53P2612



K53P2914, K53P2912

Konstruktionstype	5/3-vejs skydeventil, Aktivering pneumatisk/pneumatisk
Tilslutning	G1/8"...G1/2" iht. ISO228/1
Materialer	Hus Forniklet aluminium, Skyderventil Aluminium, Tætninger NBR
Monteringstype	Gennemgående borer i ventilhuset
Monteringsposition	vilkårlig
Medium	filtreret og oliesmurt eller uoliesmurt trykluft
Medietemperatur	0...+40°C
Omgivelsestemperatur	-10...+50°C

Bemærkninger:



Anvendelse	Ventilstørrelse 1/8" kun med Lyddæmper serie SLN-RB
	teknisk dokumentation for grundplade se separat datablad CAD-filer er tilgængelige i STASTO Store på www.stasto.eu

Typekode

K	53	P	2	3	18
		3	trykbelastet		18G1/8"
		6	spærret		14G1/4"
		9	udluftet		12G1/2"




Dimensioner

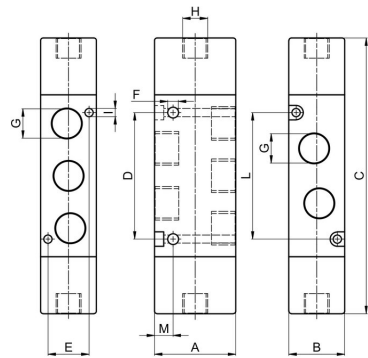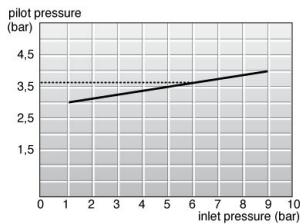


Tilslutning G	Nominal diameter DN [mm]	Trykkræfte [bar]	A	B	C	D	E	F	H	I	L	M	Gennemstrømning* [NI/min]	Type
G1/8"	6	3...9	28	18	89	35	13	3,2	G1/8"	3,2	35	8	552	K53P2.18
G1/4"	8	3...9	32	22	109	50	16,2	4,2	G1/8"	3,5	50	7,3	1040	K53P2.14
G1/2"	14	3...9	50	30	108	45,6	-	5,2	G1/8"	-	-	11	3500	K53P2.12

*Referencetryk 6bar, Referencetemperatur 20°C


Flowdiagram

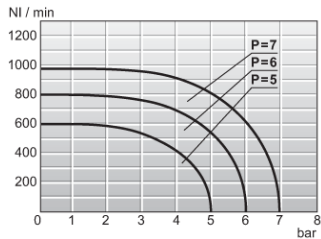

Flowdiagram 1/8"

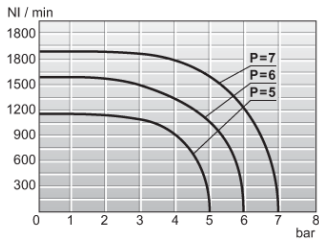

Flowdiagram 1/4"

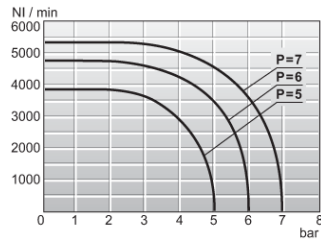

Flowdiagram 1/2"

Illustrationer ikke bindende
Konstruktions-, mål- og materialeændringer forbeholdes

