







5/3-Putni klizni ventil, 1/8"...1/2" Serija K53P2



Izvedba	5/3-putni klizni ventil, Aktiviranje pneumatski/pneumatski
Priključak	G1/8"...G1/2" prema ISO228/1
Materijali	Tijelo Niklovani aluminij, Klizač Aluminij, Brtve NBR
Način pričvršćivanja	Prolazni provrti u tijelu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimirani zrak
Temperatura medija	0...+40°C
Temperatura okoline	-10...+50°C

Napomene:



Primjena	Veličina ventila 1/8" samo s prigušivačem buke serije SLN-RB
	tehnička dokumentacija za osnovnu ploču vidi zasebni podatkovni list CAD-datoteke dostupne su u STASTO Store na www.stasto.eu

Ključ tipa

K	53	P	2	3	18
	3	pod tlakom	18	G1/8"	
	6	blokirano	14	G1/4"	
	9	odzračeno	12	G1/2"	




Dimenzije

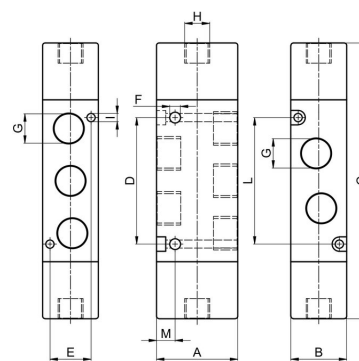


Priključak G	Nazivni promjer DN [mm]	Raspon tlaka [bar]	A	B	C	D	E	F	H	I	L	M	Protok* [Nl/min]	Tip
G1/8"	6	3...9	28	18	89	35	13	3,2	G1/8"	3,2	35	8	552	K53P2.18
G1/4"	8	3...9	32	22	109	50	16,2	4,2	G1/8"	3,5	50	7,3	1040	K53P2.14
G1/2"	14	3...9	50	30	108	45,6	-	5,2	G1/8"	-	-	11	3500	K53P2.12

*Referentni tlak 6bar, Referentna temperatura 20°C


Dijagram protoka

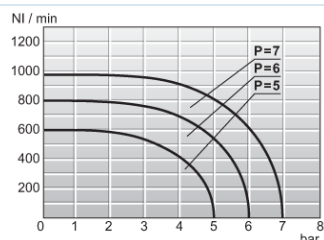

Dijagram protoka 1/8"



Dijagram protoka 1/4"



Dijagram protoka 1/2"

Ilustracije neobvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – električni / pneumatski / 3/2-, 5/2-, 5/3-putni ventili – serija K (širina priključka 16 mm) / 5/3-putni ventil Serija K5.P

Verzija 6

138291 / Generirano 2026/33 HR

PROIZVEDENO U EUROPI

+381 11 2399521
balkan@stasto.eu
© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Stranica 2 / 2

