



5/3-Putni klizni ventil, 1/8" do 1/2" Serija V53V2P




Izvedba	5/3-putni klizni ventil, Aktiviranje pneumatski/pneumatski s opružnim povratom u srednjem položaju
Priključak	G1/8"...G1/2" prema ISO228/1
Materijali	Tijelo Aluminij, Klizač Niklovanij aluminij, Brtve NBR
Način pričvršćivanja	Prolazni provrti u tijelu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimirani zrak
Temperatura medija	0...+40°C
Temperatura okoline	-10...+50°C
Napomena	CAD datoteke dostupne su u STASTO Storeu na www.stasto.eu


Dijagram protoka



Dijagram protoka 1/8"




Dijagram protoka 1/4"

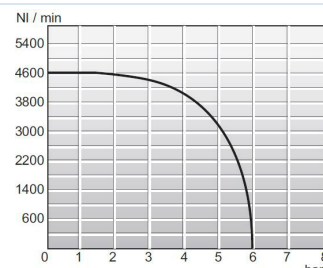


Dijagram protoka 1/2"



V52V1P ... Aktiviranje



vertikalna osovina: Upravljački tlak
horizontalna os: Radni tlak

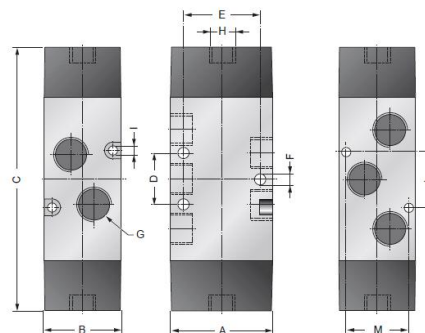

Priključak G	Nazivni promjer DN [mm]	Raspon tlaka [bar]	Protok*	Središnji položaj	A	B	C	D	E	F	H	I	L	M	Tip
G1/8"	6	3,2 - 10	530	zatvoreno	30	26	108	18	23	4,25	G1/8	3,25	28,6	20	V53V1P618
G1/8"	6	3,2 - 10	530	otvoreno	30	26	108	18	23	4,25	G1/8	3,25	28,6	20	V53V1P918
G1/4"	8	3,2 - 10	750	zatvoreno	40	30	105	20	30	4,25	G1/8	3,25	21	24,6	V53V1P614
G1/4"	8	3,2 - 10	750	otvoreno	40	30	105	20	30	4,25	G1/8	3,25	21	24,6	V53V1P914
G1/2"	15	3,2 - 10	3200	zatvoreno	60	40	192	40	50	5,5	G1/8	-	-	-	V53V1P612
G1/2"	15	3,2 - 10	3200	otvoreno	60	40	192	40	50	5,5	G1/8	-	-	-	V53V1P912

*Referentni tlak 6 bar, Referentna temperatura 20°C

Ilustracije neobvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – električni / pneumatski / 3/2-, 5/2-, 5/3-putni ventili – serija E+V (širina utikača 22 mm) / 5/3-putni ventil Serija V5

Verzija 5

138302 / Generirano 2026/33 HR

PROIZVEDENO U EUROPI

+381 11 2399521
balkan@stasto.eu
© STASTO Automatizacija d.o.o.

www.stasto.rs
Otvori seriju online
Stranica 2 / 2

