



Two-hand safety block Type ZH-A




Function	Two-hand control requires simultaneous actuation with both hands to start and maintain operation of a machine. The output signal is active only if both input signals are present within max. 0.4 seconds. Releasing a single input signal causes interruption of the output signal. Reactivation of the output signal is only possible once both actuating elements have been released.
Connection	Push-in fitting for hose outside diameter 4 mm
Materials	Body POM, Internal parts Brass/POM, Seals NBR
Nominal size	2,5mm
Pressure range	2,5 up to 8bar
Mounting type	Mounting on DIN rail to EN60715, two lateral mounting holes for M4 screws
Medium	dried, filtered and unlubricated compressed air
Medium temperature	-10 up to +50°C
Ambient temperature	-10 up to +50°C
permissible switching differential	maximum 0,4s
Approval	Type examination TÜV-A-MHF/MG/10-05159A

Dimensions and Connection diagram

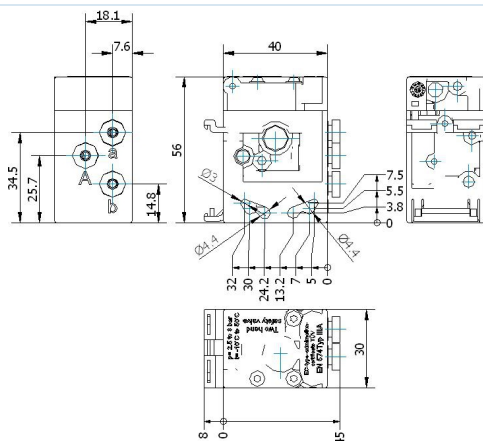

Dimensional drawing

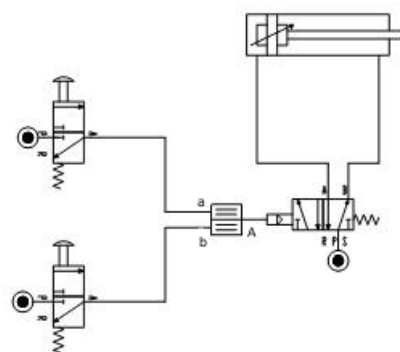

Connection diagram

Illustrations non-binding
Design, dimensional and material changes reserved

