


Zásuvné šroubení "Push-In" - Mosaz poniklovaná Série PI




Konstrukční provedení	Zásuvné šroubení s O-kroužkem a přídržnými kleštěmi pro spojení plastových hadic
Připojení	R1/8" ... R3/4" podle ISO7/1 Závit potažené PTFE, G1/8" ... G3/4" podle ISO228/1, M3...M5 podle ISO R/262
Vnější průměr trubky	3...16mm
Materiály	Těleso Mosaz poniklovaná, Upínací kleština Nerezová ocel 1.4310, Těsnění NBR
doporučené Materiály trubek	Polyamid (PA), Polyuretan (CP/PU), Polyethylen (PE), PTFE (PT)
Tolerance trubek	+/- 0,07mm do průměru 10mm, +/- 0,1mm od průměr 12mm
Médium	Stlačený vzduch, neutrální plyny
Teplota média	-20...80°C
Provozní tlak	-0,99...20bar, v závislosti na maximálním tlaku použité trubky
Speciální provedení	O-kroužek z FKM -20...150°C, chemicky poniklováno, NSF, FDA na vyžádání


PI10 Zalisovací patrona vhodná pro těleso z plastu, mosazi nebo hliníku

	Ø	D1	L1	Hmotnost [g]	Typ
	4	9,3	14,5	3,6	PI10-04-N
	6	11,5	16,5	5,7	PI10-06-N
	8	13,7	17	7,9	PI10-08-N
	10	15,8	19	10,3	PI10-10-N


PI10 Náskres pro lisované uložení

	Ø	D1	D2	D3	D4	L1	L2	Typ
	4	9,5	9,2	3	8,6	12	3,2	PI10-04-N
	6	11,7	11,4	5	10,8	14	4	PI10-06-N
	8	13,9	13,6	7	13	14,5	4	PI10-08-N
	10	16	15,7	9	15,1	16	4	PI10-10-N

PI11-360 Otočná úhlová šroubovací spojka - se dvěma L-kroužkovými nástavci


	Ø	D1	D2	D3	L1	L2	L3	L4	L5	CH	Hmotnost [g]	Typ
	4	M5x0,8	9	10	4	11	18,5	29,2	10	3	18,5	PI11-04-M5-N-0-360
	4	G1/8"	9,1	14	5	15	20,5	40,4	15	4	40	PI11-04-18-N-0-360
	6	G1/8"	12	14	5	15	22,5	40,4	15	4	46	PI11-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	24	46,1	17	5	69,5	PI11-06-14-N-0-360
	8	G1/8"	14	14	5	15	23,5	40,4	15	4	50	PI11-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	24,5	46	17	5	69,5	PI11-08-14-N-0-360

PI12 Přímé šroubení se závitem do otvoru - Závít válcový




Ø	D1	D2	D3	L1	L2	CH1	CH2	Hmotnost [g]	Typ
3	M3x0,5	7	5,6	3	14,5	-	1,5	1,4	PI12-03-M3-N-0
3	M5x0,8	7	8	4	15	-	2	2,3	PI12-03-M5-N-0
4	M5x0,8	9	8	4	19	-	2,5	4,4	PI12-04-M5-N-0
4	M6x1	9	9	4,5	19,5	-	3	4,3	PI12-04-M6-N-0
4	G1/8"	9	13	5	16,5	9	3	6,1	PI12-04-18-N-0
4	G1/4"	9	16	6,5	18,5	9	3	12	PI12-04-14-N-0
6	M5x0,8	12	8	4	22	-	2,5	8,6	PI12-06-M5-N-0
6	M6x1	12	9	4,5	22,5	-	3	8,9	PI12-06-M6-N-0
6	M12x1,25	12	15	6,5	21	12	4	11,8	PI12-06-M12X1,25-N-0
6	M12x1,5	12	15	6,5	21	12	4	12,9	PI12-06-M12X1,5-N-0
6	G1/8"	12	13,5	5	19,5	12	4	9,1	PI12-06-18-N-0
6	G1/4"	12	16	6,5	19,5	12	4	12,7	PI12-06-14-N-0
6	G3/8"	12	20	7	20,5	12	4	-	PI12-06-38-N-0
6	G1/2"	12	25	8,5	22,5	12	4	-	PI12-06-12-N-0
8	G1/8"	14	14,5	5	23,5	13	6	11,5	PI12-08-18-N-0
8	G1/4"	14	16	6,5	21,5	14	6	13,9	PI12-08-14-N-0
8	G3/8"	14	20	7	21	14	6	20,1	PI12-08-38-N-0
8	G1/2"	14	25	8,5	23	14	6	34,3	PI12-08-12-N-0
10	G1/8"	16	13	5	26,5	15	8	-	PI12-10-18-N-0-YA
10	G1/4"	16	16,5	6,5	27,5	15	8	17,5	PI12-10-14-N-0
10	G3/8"	16	20	7	25	16	8	22,6	PI12-10-38-N-0
10	G1/2"	16	25	8,5	25,5	16	8	34,5	PI12-10-12-N-0
12	G1/4"	19	21	6,5	28,5	19	8	26,2	PI12-12-14-N-0
12	G3/8"	19	21	7	28,5	19	10	29	PI12-12-38-N-0
12	G1/2"	19	25	8,5	26,5	19	10	36,1	PI12-12-12-N-0
14	G3/8"	22	25	7	32	22	10	37,5	PI12-14-38-N-0
14	G1/2"	22	25	8,5	32	22	12	42,4	PI12-14-12-N-0
16	G1/2"	24	28	8,5	34,5	25	13	53,6	PI12-16-12-N-0-YA
16	G3/4"	24	28	9,5	32	24	13	68,2	PI12-16-34-N-0

PI12C Přímé šroubení se závitem do otvoru - Závít kuželový




Ø	D1	D2	L1	L2	CH1	CH2	Hmotnost [g]	Typ
4	R1/8"	9	7,5	16	10	3	5,5	PI12C-04-18-N-T
4	R1/4"	9	11	20,5	14	3	16,1	PI12C-04-14-N-T
6	R1/8"	12	7,5	21	12	4	8,7	PI12C-06-18-N-T
6	R1/4"	12	11	20,5	14	4	15,8	PI12C-06-14-N-T
6	R3/8"	12	11,5	21	17	4	-	PI12C-06-38-N-T-YA
8	R1/8"	14	7,5	25	14	6	13,2	PI12C-08-18-N-T
8	R1/4"	14	11	23,5	14	6	13,9	PI12C-08-14-N-T
8	R3/8"	14	11,5	22,5	17	6	23,6	PI12C-08-38-N-T
8	R1/2"	14	14	25	22	6	-	PI12C-08-12-N-T
10	R1/8"	16	7,5	28	16	6	-	PI12C-10-18-N-T
10	R1/4"	16	11	30,5	16	8	20,2	PI12C-10-14-N-T
10	R3/8"	16	11,5	24	17	8	20	PI12C-10-38-N-T
10	R1/2"	16	14	27	22	8	47,5	PI12C-10-12-N-T
12	R1/4"	19	11	32	19	8	28,5	PI12C-12-14-N-T
12	R3/8"	19	11,5	27,5	19	10	24,1	PI12C-12-38-N-T
12	R1/2"	19	14	27,5	22	10	42,3	PI12C-12-12-N-T
14	R3/8"	22	11,5	35,5	22	10	40,1	PI12C-14-38-N-T
14	R1/2"	22	14	32,5	22	12	39,5	PI12C-14-12-N-T

PI12 Redukce




Ø	D1	D2	L1	Hmotnost [g]	Typ
3	4	7	27	2,5	PI12-03-04-N
4	6	9	33,5	7	PI12-04-06-N
4	8	9	33,5	10	PI12-04-08-N
4	10	10	31,5	15	PI12-04-10-N
4	12	12	32,5	24,5	PI12-04-12-N
6	4	12	35,5	10	PI12-06-04-N
6	8	12	35	11,5	PI12-06-08-N
6	10	12	36,5	16,5	PI12-06-10-N
6	12	12	35,5	22,2	PI12-06-12-N
6	14	14	37,5	25	PI12-06-14-N
8	6	14	39,5	13,5	PI12-08-06-N
8	10	14	37	15	PI12-08-10-N
8	12	14	39	23	PI12-08-12-N
8	14	14	38,5	31,5	PI12-08-14-N
10	12	16	42	20	PI12-10-12-N
10	14	16	42	29,5	PI12-10-14-N
12	14	19	43	24	PI12-12-14-N
14	16	22	49,5	91,8	PI12-14-16-N


PI13 Přímé Šroubení s převlečnou maticí

	Ø	D1	D2	D3	L1	L2	CH	Hmotnost [g]	Typ
	4	G1/8"	9	13	7,5	23,5	9	10	PI13-04-18-N
	6	G1/8"	12	14	7,5	26	12	15,1	PI13-06-18-N
	6	G1/4"	12	16	11	30	12	18,5	PI13-06-14-N
	8	G1/8"	14	13	7,5	26	14	17,5	PI13-08-18-N
	8	G1/4"	14	16	11	30	14	20,2	PI13-08-14-N
	8	G3/8"	14	20	12	31	14	25,9	PI13-08-38-N
	10	G1/4"	16	16	11	32	16	24,4	PI13-10-14-N
	10	G3/8"	16	20	12	33,5	16	30,3	PI13-10-38-N
	10	G1/2"	16	25	13,5	36,5	16	45	PI13-10-12-N
	12	G3/8"	19	23,1	11	34	20	38,3	PI13-12-38-N-YA
	12	G1/2"	18,8	25	11	37	19	50,9	PI13-12-12-N-YA

PI13 Přímá spojka

	Ø 1	Ø 2	D1		L1	Hmotnost [g]	Typ
	3	3	6,5	6,5	22,5	2,7	PI13-03-N
	4	4	9	9	28	6,8	PI13-04-N
	6	6	12	12	33,5	15	PI13-06-N
	6	4	12	12	31	14,7	PI13-06-04-N
	8	8	14	14	34	18	PI13-08-N
	8	6	14	14	34	21	PI13-08-06-N
	10	10	16	16	38,5	22,5	PI13-10-N
	10	8	16	16	36,5	25,2	PI13-10-08-N
	12	12	19	19	41	37	PI13-12-N
	12	8	19	14	39	-	PI13-12-08-N
	12	10	19	16	40,5	-	PI13-12-10-N
	14	14	22	22	47	47,4	PI13-14-N
	14	12	22	19	44,5	-	PI13-14-12-N-YA
	16	16	24	24	47	63,2	PI13-16-N
	16	12	24	19	44,5	-	PI13-16-12-N
	16	14	24	22	47	-	PI13-16-14-N

PI14-360 Otočná úhlová šroubovací spojka - Závit válcový

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Hmotnost [g]	Typ
	3	M3x0,5	7	7	3	8,5	13	14	2	4,6	PI14-03-M3-N-0-360
	3	M5x0,8	7	10	4	11	14,5	19	3	8,1	PI14-03-M5-N-0-360
	4	M5x0,8	9	10	4	11	18,5	19	3	10,1	PI14-04-M5-N-0-360
	4	G1/8"	9	14	5	15	20,5	25,5	4	22,2	PI14-04-18-N-0-360
	6	M5x0,8	12	10	4	11	21,5	19	3	13,3	PI14-06-M5-N-0-360
	6	G1/8"	12	14	5	15	22,5	25,5	4	24,4	PI14-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	24	29	5	39,3	PI14-06-14-N-0-360
	8	G1/8"	14	14	5	15	23,5	25,5	4	25,7	PI14-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	24,5	29	5	39,1	PI14-08-14-N-0-360
	10	G1/4"	16	18	6,5	17,5	27	29	5	43,6	PI14-10-14-N-0-360
	10	G3/8"	16	22	7	19,5	29	32,5	6	62,2	PI14-10-38-N-0-360
	12	G3/8"	19	22	7	19,5	29,5	32,5	6	67,1	PI14-12-38-N-0-360
	12	G1/2"	19	26	8,5	24	31,5	39,5	8	114,8	PI14-12-12-N-0-360

Verze 9

148922 / Vygenerováno 2026/38 CS

VÝROBENO V EVROPE

+420 317 701700 00


lan@stasto.cz

© STASTO Automation s.r.o.

www.stasto.cz


Strana 5 / 14

PI15-360 Otočná T-šroubovací spojka - se dvěma T-kroužky


	Ø	D1	D2	D3	L1	L2	L3	L4	L5	CH	Hmotnost [g]	Typ
	4	M5x0,8	9	10	4	11	38	29	10	3	25	PI15-04-M5-N-0-360
	4	G1/8"	9	14	5	15	41	40,5	15	4	50	PI15-04-18-N-0-360
	6	G1/8"	12	14	5	15	45	40,5	15	4	59	PI15-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	48	46	17	5	82	PI15-06-14-N-0-360
	8	G1/8"	14	14	5	15	47	40,5	15	4	61	PI15-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	49	46	17	5	83,5	PI15-08-14-N-0-360

PI16-360 Otočná úhlová šroubovací spojka - Závít válcový


	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	3	M5x0,8	7	10	4	14	14	9	7,1	PI16-03-M5-N-0-360
	4	M5x0,8	9	10	4	14	17,5	9	8,8	PI16-04-M5-N-0-360
	4	M6x1	9	10	4,5	14,5	17,5	9	8,7	PI16-04-M6-N-0-360
	4	G1/8"	9	14,5	5	18,2	19,5	13	15,7	PI16-04-18-N-0-360
	4	G1/4"	9	16	6,5	21,7	19,5	13	19	PI16-04-14-N-0-360
	6	M5x0,8	12	10	4	14	20,5	9	11,9	PI16-06-M5-N-0-360
	6	M6x1	12	10	4,5	14,5	20,5	9	12	PI16-06-M6-N-0-360
	6	M12x1,25	12	15	6,5	21,7	22	13	22	PI16-06-M12X1,25-N-0-360
	6	M12x1,5	12	15	6,5	21,7	22	13	21,5	PI16-06-M12X1,5-N-0-360
	6	G1/8"	12	14,5	5	18	22	13	18,5	PI16-06-18-N-0-360
	6	G1/4"	12	16	6,5	21,7	22	13	22	PI16-06-14-N-0-360
	6	G3/8"	12	20	7	22,2	22	13	-	PI16-06-38-N-0-360
	6	G1/2"	12	25	8,5	24,2	22	13	-	PI16-06-12-N-0-360
	8	G1/8"	14	14,5	5	18	22,5	13	22	PI16-08-18-N-0-360
	8	G1/4"	14	16	6,5	21,5	22,5	13	26	PI16-08-14-N-0-360
	8	G3/8"	14	20	7	25,5	23	16	36,8	PI16-08-38-N-0-360
	8	G1/2"	14	25	8,5	27,5	23	16	41	PI16-08-12-N-0-360
	10	G1/8"	16	18	5	20,5	26	16	-	PI16-10-18-N-0-360-YC
	10	G1/4"	16	18	6,5	22	26	16	32,5	PI16-10-14-N-0-360
	10	G3/8"	16	20	7	25,5	26	16	39,5	PI16-10-38-N-0-360
	10	G1/2"	16	25	8,5	27,5	26	16	43,2	PI16-10-12-N-0-360
	12	G1/4"	19	22,5	6,5	25,5	28,5	20	58,5	PI16-12-14-N-0-360
	12	G3/8"	19	22,5	7	26	28,5	20	57	PI16-12-38-N-0-360
	12	G1/2"	19	25	8,5	30,5	28,5	20	65,1	PI16-12-12-N-0-360
	14	G3/8"	22	22,5	7	26	32	20	61,6	PI16-14-38-N-0-360
	14	G1/2"	22	25	8,5	30,5	32	20	68,5	PI16-14-12-N-0-360
	16	G1/2"	24	27	8,5	33	36,5	25	105,2	PI16-16-12-N-0-360
	16	G3/4"	24	32	9,5	35	36,5	25	113,8	PI16-16-34-N-0-360




PI16C-360 Otočná úhlová šroubovací spojka - Závít kuželový

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	R1/8"	9	11,2	7,5	17,9	19,5	10	10,8	PI16C-04-18-N-T-360
	4	R1/4"	9	15,5	11	24	19,5	14	20,9	PI16C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20	22	13	19,4	PI16C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24	22	14	24	PI16C-06-14-N-T-360
	6	R3/8"	12	20	11,5	25	22	18	-	PI16C-06-38-N-T-360
	8	R1/8"	14	14,5	7,5	20	22,5	13	23	PI16C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	22,5	14	26,4	PI16C-08-14-N-T-360
	8	R3/8"	14	20	11,5	27	23	18	39,2	PI16C-08-38-N-T-360
	8	R1/2"	14	24,5	14	31	23	22	-	PI16C-08-12-N-T-360
	10	R1/8"	16	20	7,5	26,5	23	18	-	PI16C-10-18-N-T-360
	10	R1/4"	16	20	11	26,5	26	18	38,6	PI16C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	26	18	41	PI16C-10-38-N-T-360
	10	R1/2"	16	24,5	14	31	26	22	-	PI16C-10-12-N-T-360
	12	R1/4"	19	22,5	11	30	28,5	20	-	PI16C-12-14-N-T-360
	12	R3/8"	19	22,5	11,5	30,5	28,5	20	61,8	PI16C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	28,5	22	71,5	PI16C-12-12-N-T-360
	14	R3/8"	22	22,5	11,5	30,5	32	20	66,2	PI16C-14-38-N-T-360
	14	R1/2"	22	24,5	14	33,5	32	22	74,6	PI16C-14-12-N-T-360


PI16C Úhlové šroubení s vnějším závitem - Kuželový závít

	Ø	D1	D2	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	R1/8"	9	7,8	15	17,5	8	8,1	PI16C-04-18-N-T
	4	R1/4"	9	10	19	17,5	10	13,9	PI16C-04-14-N-T
	6	R1/8"	12	8,2	15,5	20,5	10	13,2	PI16C-06-18-N-T
	6	R1/4"	12	10	19	20,5	10	16,7	PI16C-06-14-N-T
	8	R1/8"	14	7,5	19	22,5	12	19,6	PI16C-08-18-N-T
	8	R1/4"	14	10,5	20	22,5	12	22,6	PI16C-08-14-N-T
	10	R1/4"	16	9,5	22	25	14	27,1	PI16C-10-14-N-T
	10	R3/8"	16	10,8	22,5	25	14	32,1	PI16C-10-38-N-T


PI16 Úhlová spojka se zasouvacím nátrubkem

	Ø	L1	L2	D1	D2	Hmotnost [g]	Typ
	4	25,7	19,5	4	9,1	14	PI16-04-N
	4	29,7	19,5	6	9,1	15	PI16-04-06-N
	6	25,7	22	4	12	17	PI16-06-04-N
	6	29,7	22	6	12	17	PI16-06-N
	6	29,7	22	8	12	17,5	PI16-06-08-N
	8	29,5	22,5	6	14	20,5	PI16-08-06-N
	8	29,5	22,5	8	14	20,5	PI16-08-N
	10	33,5	26	10	16	30	PI16-10-N


PI17-360 Otočná úhlová šroubovací spojka

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	G1/8"	9,1	14,5	6,5	17,9	19,5	13	17,3	PI17-04-18-N-360
	6	G1/8"	12	14,5	6,5	17,9	22	13	19,7	PI17-06-18-N-360
	6	G1/4"	12	18	10	22,2	22	16	25,4	PI17-06-14-N-360
	8	G1/8"	14	14,5	6,5	17,7	22,5	13	23,1	PI17-08-18-N-360
	8	G1/4"	14	18	10	22	22,5	16	29,1	PI17-08-14-N-360
	10	G1/4"	16	18	10	23	26	16	35,6	PI17-10-14-N-360
	10	G3/8"	16	22,5	10,5	25	26	20	43,5	PI17-10-38-N-360


PI17 Úhlová spojka

	Ø	D2	L1	Hmotnost [g]	Typ
	3	7	12,8	4,5	PI17-03-N
	4	9	17,5	9	PI17-04-N
	6	12	20,5	16,5	PI17-06-N
	8	14	22,5	22	PI17-08-N
	10	16	25	29,5	PI17-10-N
	12	19	26,5	48,5	PI17-12-N
	14	22	31,5	58	PI17-14-N
	16	24	36,5	90,6	PI17-16-N


PI19-360 Otočné, dlouhé úhlové šroubení se šroubovacím připojením - Závit válcový

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	G1/8"	9,1	14,5	5	29,2	19,5	13	25,6	PI19-04-18-N-0-360
	6	G1/8"	12	14,5	5	32,2	22	13	30,5	PI19-06-18-N-0-360
	6	G1/4"	12	16	6,5	35,7	22	13	30,9	PI19-06-14-N-0-360
	8	G1/8"	14	14,5	5	34	22,5	13	35,7	PI19-08-18-N-0-360
	8	G1/4"	14	18	6,5	37,5	22,5	13	36	PI19-08-14-N-0-360


PI20-360 Otočný křížový spojovací prvek

	Ø1	Ø2	L1	L2	L3	D1	D2	Hmotnost [g]	Typ
	4	4	18,4	39	39	9,1	9,1	31	PI20-04-N-360
	4	6	18,4	39	44	9,1	12	36	PI20-04-06-N-360
	6	6	18	44	44	12	12	41	PI20-06-N-360
	6	8	18	44	45	12	14	46,5	PI20-06-08-N-360
	8	8	18	45	45	14	14	50	PI20-08-N-360


PI21-360 Otočná T-šroubovací spojka - Závit válcový

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	G1/8"	9,1	14,5	5	18,2	39	13	20,2	PI21-04-18-N-0-360
	4	G1/4"	9,1	16	6,5	21,7	39	13	23,9	PI21-04-14-N-0-360
	6	G1/8"	12	14,5	5	18	44	13	25,2	PI21-06-18-N-0-360
	6	G1/4"	12	16	6,5	21,5	44	13	29,1	PI21-06-14-N-0-360
	8	G1/8"	14	14,5	5	18	45	13	30,7	PI21-08-18-N-0-360
	8	G1/4"	14	16	6,5	21,5	45	13	34,1	PI21-08-14-N-0-360
	8	G3/8"	14	20	7	25,5	46	16	46,4	PI21-08-38-N-0-360
	10	G1/4"	16	18	6,5	22	52	16	44,4	PI21-10-14-N-0-360
	10	G3/8"	16	20	7	25,5	52	16	49,7	PI21-10-38-N-0-360
	12	G3/8"	19	22,5	7	26	57	20	75,3	PI21-12-38-N-0-360
	12	G1/2"	19	25	8,5	30,5	57	20	82	PI21-12-12-N-0-360

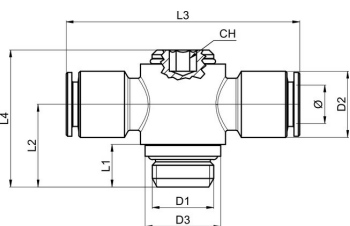
PI21C-360 Otočná T-šroubovací spojka - Závit kuželový

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	4	R1/8"	9,1	14,5	7,5	20,2	39	13	21,5	PI21C-04-18-N-T-360
	4	R1/4"	9,1	15,5	11	24,2	39	14	25,6	PI21C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20	44	13	26,3	PI21C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24	44	14	30,4	PI21C-06-14-N-T-360
	8	R1/8"	14	14,5	7,5	20	45	13	31,3	PI21C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	45	14	35,3	PI21C-08-14-N-T-360
	8	R3/8"	14	20	11,5	27	46	18	49,1	PI21C-08-38-N-T-360
	10	R1/4"	16	20	11	26,5	52	18	50	PI21C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	52	18	51,6	PI21C-10-38-N-T-360
	12	R3/8"	19	22,5	11,5	30,5	57	20	80	PI21C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	57	22	83,5	PI21C-12-12-N-T-360


PI21 T-spojka se zasouvací vsuvkou

	Ø	L1	L2	D1	D2	Hmotnost [g]	Typ
	4	25,7	39	4	9	18,5	PI21-04-N
	4	29,7	39	6	9	19,5	PI21-04-06-04-N
	6	29,5	44	6	12	24,5	PI21-06-N
	6	29,5	44	8	12	24,5	PI21-06-08-06-N
	8	29,5	45	8	14	29	PI21-08-N
	8	33,5	46	10	14	38,5	PI21-08-10-08-N
	10	33,5	52	10	16	41	PI21-10-N


PI22-360 Otočná T-šroubovací spojka - Závit válcový

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Hmotnost [g]	Typ
	4	M5x0,8	9	10	4	11	38	19,1	3	13,8	PI22-04-M5-N-0-360
	4	G1/8"	9	14	5	15	41	25,5	4	27,4	PI22-04-18-N-0-360
	6	M5x0,8	12	10	4	11	43	19,1	3	19,9	PI22-06-M5-N-0-360
	6	G1/8"	12	14	5	15	45	25,5	4	32,1	PI22-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	48	29	5	45,8	PI22-06-14-N-0-360
	8	G1/8"	14	14	5	15	47	25,5	4	34,1	PI22-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	49	29	5	46,5	PI22-08-14-N-0-360
	10	G1/4"	16	18	6,5	17,5	54	29	5	55,2	PI22-10-14-N-0-360
	10	G3/8"	16	22	7	19,5	58	32,5	6	72,4	PI22-10-38-N-0-360
	12	G3/8"	19	22	7	19,5	59	32,5	6	79	PI22-12-38-N-0-360
	12	G1/2"	19	27	8,5	24	63	39,6	8	124,7	PI22-12-12-N-0-360


PI23 Y-spojka

	Ø1	Ø2	D2	L1	L2	Hmotnost [g]	Typ
	3	3	6,8	25	7,5	8,1	PI23-06-N
	4	4	9	29,5	9,5	14,3	PI23-04-N
	6	6	12	36,5	12,5	32,7	PI23-06-N
	6	4	12	34,1	12,5	36,1	PI23-04-06-N
	8	8	14	37,5	14,5	44,1	PI23-08-N
	8	6	14	37,5	14,5	51,1	PI23-06-08-N
	10	10	16	44,5	16,5	62,7	PI23-10-N
	10	8	16	44	16,5	74,9	PI23-08-10-N
	12	12	19	49	19,5	95,8	PI23-12-N

PI23-360 Otočný Y-spojka

	Ø1	Ø2	L1	L2	L3	D1	D2	Hmotnost [g]	Typ
	4	4	18,4	39	19,5	9,1	9,1	27	PI23-04-N-360
	4	6	18,4	39	22	9,1	12	29,5	PI23-04-06-N-360
	6	6	18,2	44	22	12	12	34,5	PI23-06-N-360
	6	8	18	44	22,5	12	14	37,5	PI23-06-08-N-360
	8	8	18	45	22,5	14	14	42	PI23-08--N-360

PI24-360 Otočná T-šroubovací spojka pro zašroubování - Závit válcový

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Hmotnost [g]	Typ
	4	G1/8"	9,1	14,5	5	18,2	19,5	37,7	13	20,5	PI24-04-18-N-0-360
	4	G1/4"	9,1	16	6,5	21,7	19,5	41,2	13	24	PI24-04-14-N-0-360
	6	G1/8"	12	14,5	5	18,2	22	40,2	13	26	PI24-06-18-N-0-360
	6	G1/4"	12	16	6,5	21,7	22	43,7	13	29,5	PI24-06-14-N-0-360
	8	G1/8"	14	14,5	5	18	22,5	40,5	13	30	PI24-08-18-N-0-360
	8	G1/4"	14	16	6,5	21,5	22,5	44	13	33,5	PI24-08-14-N-0-360
	10	G1/4"	16	16	6,5	22	26	48	16	44	PI24-10-14-N-0-360
	10	G3/8"	16	20	7	25,5	26	51,5	16	49	PI24-10-38-N-0-360
	12	G3/8"	19	22,5	7	26	28,5	54,5	20	73	PI24-12-38-N-0-360
	12	G1/2"	19	25	8,5	30,5	28,5	59	20	77	PI24-12-12-N-0-360

Verze 9

148922 / Vygenerováno 2026/38 CS

VYROBENO V EVROPE

+420 317 701700 00


lan@stasto.cz

© STASTO Automation s.r.o.


www.stasto.cz

Strana 11 / 14


PI24C-360 Otočná T-šroubovací spojka pro zašroubování - Závít kuželový

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Hmotnost [g]	Typ
	4	R1/8"	9,1	14,5	7,5	20,2	19,5	39,5	13	22	PI24C-04-18-N-T-360
	4	R1/4"	9,1	15,5	11	24,2	19,5	43,7	14	25,5	PI24C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20,2	22	42,2	13	27,5	PI24C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24,2	22	46,2	14	31	PI24C-06-14-N-T-360
	8	R1/8"	14	14,5	7,5	20	22,5	42,5	13	31	PI24C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	22,5	46,5	14	35	PI24C-08-14-N-T-360
	10	R1/4"	16	20	11	26,5	26	52,5	18	50	PI24C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	26	53	18	51	PI24C-10-38-N-T-360
	12	R3/8"	19	22,5	11,5	30,5	28,5	59	20	75	PI24C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	28,5	62	22	83,5	PI24C-12-12-N-T-360


PI24 L-spojka se zasouvacím nátrubkem

	Ø	L1	L2	L3	D1	D2	Hmotnost [g]	Typ
	4	25,	19,5	45,2	4	9,1	18,5	PI24-04-N
	4	29,7	19,5	49,2	6	9,1	20	PI24-04-06-04-N
	6	29,7	22	51,7	6	12	25	PI24-06-N
	6	29,7	22	51,7	8	12	25,5	PI24-06-08-06-N
	8	29,5	22,5	52	8	14	30	PI24-08-N
	10	33,5	26	59,5	10	16	41	PI24-10-N

PI27 Průchodková šroubení

	Ø	D2	L1	L2 max	CH	Hmotnost [g]	Typ
	3	M8x0,75	22,5	9,5	12	14,5	PI27-03-N
	4	M12x1	28	11	16	23,5	PI27-04-N
	6	M14x1	34	16	18	33	PI27-06-N
	8	M16x1	34	16	20	39,5	PI27-08-N
	10	M18x1	39	19	22	51,5	PI27-10-N
	12	M20x1	41	20	24	60	PI27-12-N

PI29 T-spojka

	Ø1	Ø2	D1	D2	L1	L2	Hmotnost [g]	Typ
	3	3	7	7	12,8	25,6	5,6	PI29-03-N
	4	4	9	9	17,5	35	12,5	PI29-04-N
	6	6	12	12	20	40	22,5	PI29-06-N
	6	4	12	9	18	40	-	PI29-06-04-N
	8	8	14	14	21	42	28	PI29-08-N
	8	6	14	12	20,5	42	-	PI29-08-06-N
	10	10	16	16	24,5	49	39,2	PI29-10-N
	10	8	16	14	23	49	-	PI29-10-08-N
	12	12	19	19	26	52	61,3	PI29-12-N
	12	10	19	16	26	52	-	PI29-12-10-N
	14	14	22	22	30,5	61	77,1	PI29-14-N
	16	16	24	24	36,5	73	124	PI29-16-N


PI35 L-kroužkový díl

The image is a technical drawing of a PI35 L-kroužkový díl (PI35 L-ring part). It shows a cross-section of the part with various dimensions labeled. L1 is the total length, L2 is the length of the central section, D1 is the inner diameter, D2 is the outer diameter, D3 is the diameter of the central hole, and Ø is the diameter of the central hole.

Ø	D1	D2	D3	L1	L2	Hmotnost [g]	Typ
4	M5	9,1	10	9	18,5	7,7	PI35-04-M5-N
4	M5	9,1	10	10	18,5	6,6	PI35-04-M5-N-M*
4	G1/8"	9,1	14	15	20,5	13,5	PI35-04-18-N
6	M5	12	10	9	21,5	10,9	PI35-06-M5-N
6	M5	12	10	10	21,5	10,1	PI35-06-M5-N-M*
6	G1/8"	12	14	15	22,5	15,5	PI35-06-18-N
6	G1/4"	12	18	17	24	21,6	PI35-06-14-N
8	G1/8"	14	14	15	23,5	16,7	PI35-08-18-N
8	G1/4"	14	18	17	24,5	22,8	PI35-08-14-N
8	G3/8"	14	22	20	26,5	32,7	PI35-08-38-N
10	G1/4"	16	18	17	27	27,2	PI35-10-14-N
10	G3/8"	16	22	20	29	34,5	PI35-10-38-N
12	G3/8"	19	22	20	29,5	38,8	PI35-12-38-N
12	G1/2"	19	26	24	31,5	56,9	PI35-12-12-N

*pro Škrticí ventil s otočným škrcením a Škrticí zpětný ventil s otočným šroubením

PI36 T-kroužkový kus




Ø	D1	D2	D3	L1	L2	Hmotnost [g]	Typ
4	M5	9	10	9	37	10,9	PI36-04-M5-N
4	G1/8"	9	14	15	41	18	PI36-04-18-N
6	G1/8"	12	14	15	45	23	PI36-06-18-N
6	G1/4"	12	18	17	48	28,7	PI36-06-14-N
8	G1/8"	14	14	15	47	25,3	PI36-08-18-N
8	G1/4"	14	18	17	49	29,7	PI36-08-14-N
8	G3/8"	14	22	20	53	42,5	PI36-08-38-N
10	G1/4"	16	18	17	54	37,9	PI36-10-14-N
10	G3/8"	16	22	20	58	44,5	PI36-10-38-N
12	G3/8"	19	22	20	59	51,3	PI36-12-38-N
12	G1/2"	19	27	24	63	67,2	PI36-12-12-N

PI38 Závitová zasouvací vsuvka


A technical drawing of a PI38 valve assembly. The drawing shows a side view of the valve with various dimensions labeled. L1 is the height of the main body, L2 is the height of the handle, D1 is the diameter of the main body, D2 is the diameter of the handle, D3 is the diameter of the base, and CH is the height of the handle. The drawing is a line drawing with no shading.

Ø D2 [mm]	D1	D3	L1	L2	CH	Hmotnost [g]	Typ
4	M5x0,8	10	4	26	9	3,2	PI38-04-M5-N-0
4	G1/8"	14,5	5	28	13	7,2	PI38-04-18-N-0
4	G1/4"	16	6,5	29,5	16	12,4	PI38-04-14-N-0
6	M5x0,8	10	4	28	9	5,9	PI38-06-M5-N-0
6	G1/8"	14,5	5	30	13	8,5	PI38-06-18-N-0
6	G1/4"	16	6,5	32,5	16	13,7	PI38-06-14-N-0
8	G1/8"	14,5	5	31	13	9,4	PI38-08-18-N-0
8	G1/4"	16	6,5	33,5	16	14,5	PI38-08-14-N-0
10	G1/4"	16	6,5	34,5	16	15,5	PI38-10-14-N-0
10	G3/8"	20	7	35	20	22	PI38-10-38-N-0
12	G3/8"	20	7	38	20	23,6	PI38-12-38-N-0
12	G1/2"	25	8,5	39,5	25	38	PI38-12-12-N-0


PI38 Spojovací kolík

	D1	L1	Hmotnost [g]	Typ
	4	35	2,7	PI38-04-N
	6	40	5,1	PI38-06-N
	8	42	8	PI38-08-N
	10	50	11,8	PI38-10-N
	12	53	15,3	PI38-12-N
	14	54	18,8	PI38-12-N

PI40 Uzavírací kolík

	D1	L1	Hmotnost [g]	Typ
	3	20	1	PI40-03-N
	4	25	2,3	PI40-04-N
	6	25	3,7	PI40-06-N
	8	30	7,2	PI40-08-N
	10	35	11,8	PI40-10-N
	12	40	18,2	PI40-12-N
	14	40	26,2	PI40-14-N
	16	40	32,5	PI40-16-N

PI85-360 Otočná úhlová šroubovací spojka 45° - Závít válcový

	Ø	D1	D2	D3	L1	L2	L3	CH	Hmotnost [g]	Typ
	6	G1/8"	12	12,8	5	21	21	13	-	PI85-06-18-N-0-360
	6	G1/4"	12	16	6,5	24,5	21	13	-	PI85-06-14-N-0-360
	8	G1/8"	14	12,8	5	21	21	13	-	PI85-08-18-N-0-360
	8	G1/4"	14	16	6,5	24,5	21	13	-	PI85-08-14-N-0-360
	10	G1/4"	16	16	6,5	23	25	13	-	PI85-10-14-N-0-360
	10	G3/8"	16	20	7	26,5	25	16	-	PI85-10-38-N-0-360
	12	G3/8"	20	20	7	26	25	16	-	PI85-12-38-N-0-360
	12	G1/2"	20	25	8,5	30,5	25	20	-	PI85-12-12-N-0-360

Ilustrace nezávazné

Změny konstrukce, rozměrů a materiálu vyhrazeny