


Compressed air nozzles - Blow gun


Standard nozzle, Aluminium



Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	1,4	120	82	S-26-SN




Cushioning nozzle, Aluminium, Sintered bronze




Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	1,1	318	65	S-26-MN

Nozzle with protective shield, Aluminium, Polyethylene



Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	1,4	120	82	S-26-SNPS


Full jet nozzle, Aluminium



Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	3,1	336	93	S-26-VN




Safety and noise silencer nozzle, Zinc die casting

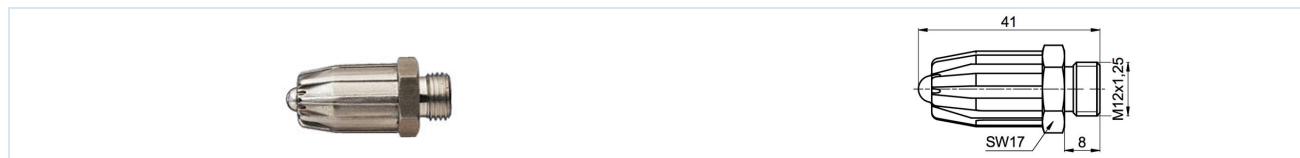


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	3	300	77	S-26-SMN

Air jacket nozzle, Aluminium

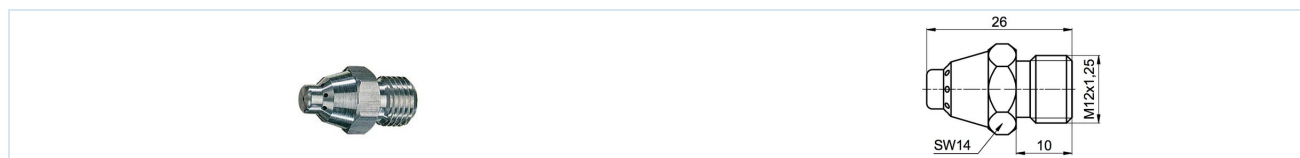


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	2	426	82	S-26-AJN

Low-noise fine blasting nozzle, Steel nickel-plated, Brass

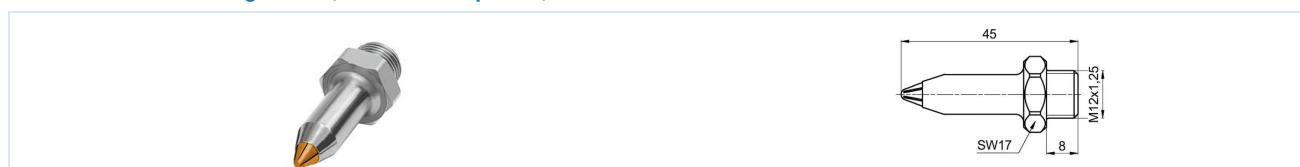


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	3,8	350	78,5	S-26-FJN

Low-noise round nozzle, Aluminium

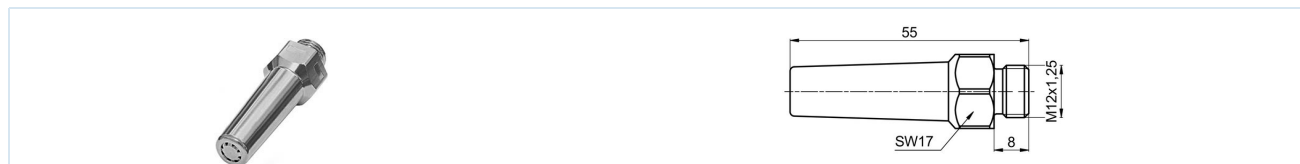

Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	4	650	83	S-26-RN-1


Low-noise round nozzle, Aluminium

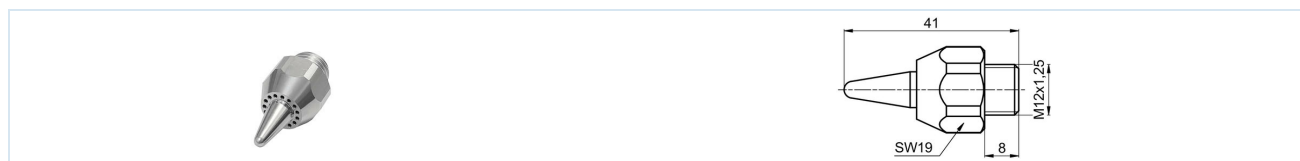

Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	10,5	1200	88	S-26-RN-2




Low-noise round nozzle, Aluminium

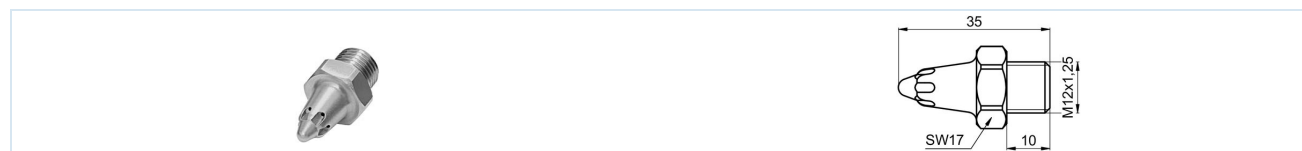


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	4,3	370	83	S-26-RN-3

Low-noise round nozzle, Aluminium

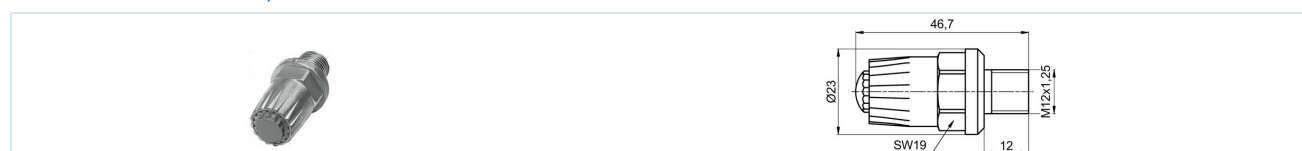


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	7,9	1030	85	S-26-RN-4

Low-noise flat nozzle, Brass nickel-plated

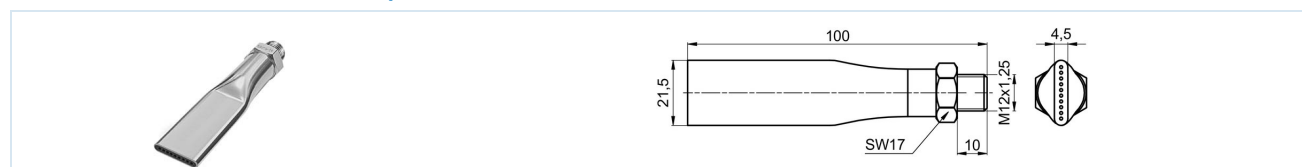


Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	8,2	930	86	S-26-FN-21,5

Low-noise flat nozzle, Brass nickel-plated

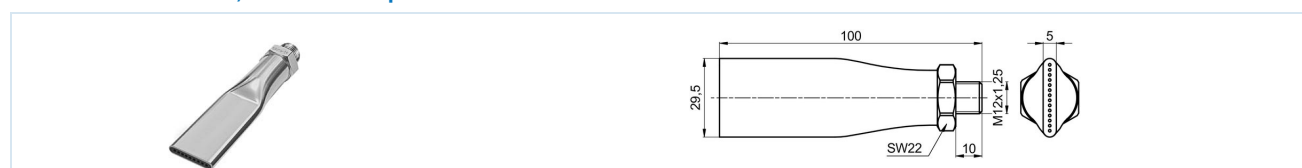

Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	11,5	1080	90	S-26-FN-29

Low-noise flat nozzle, Brass nickel-plated

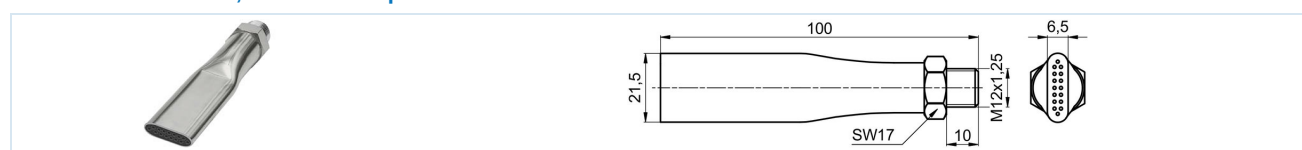

Connection	Blowing force at 100 mm distance at 6 bar (N)	Air consumption at 6 bar (NI/min)	Noise at 1 m distance at 6 bar (dB(A))	Type
M12x1,25	13,2	1300	92	S-26-FN-21

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Hoses, Tubes, Manometer and accessories / Blow gun and accessories / Protection shield for nozzles

Version 6

138811 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 3 / 3

