


Ball valves made of brass Series 374



Design type	Shut-off valve with floating ball, Miniature version
Connection	G1/4"...G1/2" according to ISO228/1
Materials	Body Nickel-plated brass CW617N, Ball brass hard chrome-plated, Ball seal PTFE, Spindle seal FKM, Hand lever Polyamide
Mounting type	Installation in rigid piping system
Mounting position	any
Actuation	by 90° rotation of the hand lever
Application range	Gases and liquids of group 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-10...+90°C
Operating pressure	Nominal pressure according to table


Dimensions - Female/female thread

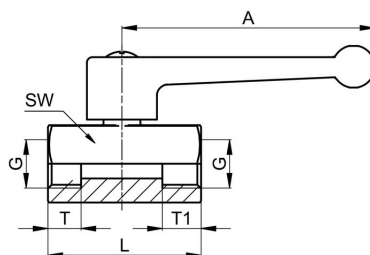

Connection	Nominal size DN[mm]	PN [bar]	SW	T	T1	L	A	Kv value [m³/h]	Weight [approx. kg]	Type
G1/4"	8	10	21	9	10,5	41,5	68,5	4,3	0,11	374.01
G3/8"	8	10	21	12	10	41,5	68,5	2,7	0,10	374.02
G1/2"	10	10	25	12,5	10,5	47	68,5	5,4	0,14	374.03



Dimensions - Internal/external thread

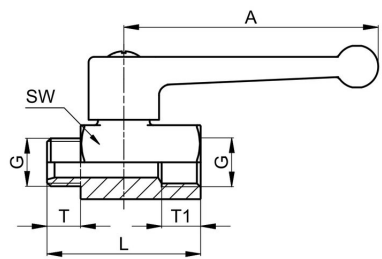

Connection	Nominal size DN[mm]	PN [bar]	SW	T	T1	L	A	Kv value [m³/h]	Weight [approx. kg]	Type
G1/4"	8	10	21	9	10,5	41,5	69	4,3	0,09	374.11
G3/8"	8	10	21	10	10	40,5	69	2,7	0,09	374.12
G1/2"	10	10	25	12	10,6	46	69	5,4	0,14	374.13

Illustrations non-binding
Design, dimensional and material changes reserved

Armatures / Ball valves - manually operated / Ball valves - brass / Ball valve made of brass Series 374