


Stainless steel flanged ball valve Type BA894-GLD



Design type	Full port ball valve with floating ball, full bore passage
Actuation	Handwheel gearbox
Connection	rotatable flanges according to EN1092-1
Materials	Housing Stainless steel 1.4404 polished, Ball Stainless steel 1.4404, Ball seal MPTFE, Spindle seal PTFE, O-ring EPDM, Gearbox Aluminium housing
Application range	Fluids and gases of group 1 and 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-20...+150°C
Mounting type	Installation in rigid piping system
Mounting position	any
Special version	Gearbox with shut-off device oil- and grease-free version for hydrogen and oxygen
Approvals	Mill test certificate 3.1 ATEX II 2G Ex h IIC T4 Gb / II 2D Ex h IIIC T135°C Db

Dimensions

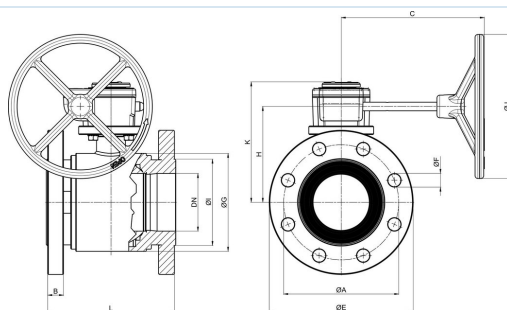

Nominal size DN[mm]	Flange according to EN1092-1	max. Operating pressure [bar]	A	B	C	ØE	F	ØG	H	ØI	ØJ	L	K	Kv value [m ³ /h]	Weight [approx. kg]	Type
65	PN16/PN40	16	145	18	199	185	4 x Ø18	113	121,5	110	200	170	156	510	-	BA894-65-GLD-A3C
2991.V90-QM08 2991.V90-QM09																
80	PN16/PN40	16	160	18	199	200	8 x Ø18	136	133	120	200	180	167,5	770	-	BA894-80-GLD-A3C
2901.V90-QM12 2901.V90-QM13 2901.V90-QM17 2901.V90-QM18 2901.V90-QM19 2951.V90-QM11 2951.V90-QM174 2951.V90-QM175 2993.V90-QM11																
100	PN16/PN25	16	190	20	199	220	8 x Ø18	167	147	140	200	190	181,5	1200	-	BA894-100-GLD-A3C
2901.V90-QM32 2901.V90-QM33 2901.V90-QM34 2901.V90-QM36 2901.V90-QM37 2901.V90-QM38 2901.V90-QM42 2901.V90-QM44																
125	PN16	16	210	22	199	250	8 x Ø18	167	147	153	200	200	181,5	1200	-	BA894-125-GLD-A3C
2951.V90-QM15																

Illustrations non-binding Design, dimensional and material changes reserved

Armatures / Ball valves - manually operated / Other materials - A02 / Other materials - A02 / [BA894-65-GLD-A3C] BA894-65-GLD-A3C

Version 4

212249 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 1 / 1

