


3-Way stainless steel flanged ball valve Type BA305-25-LLD-A3C



Design type	Three-way ball valve with floating ball, full bore passage, Ball sealed on all sides, non-overlapping
Actuation	by 90° rotation of the hand lever
Connection	rotatable flanges according to EN1092-1
Materials	Housing Stainless steel 1.4404 polished, Ball Stainless steel 1.4404, Stainless steel hand lever 1.4307 plasticized, Ball seal MPTFE, Spindle seal PTFE, O-ring EPDM-Peroxide
Application range	Fluids and gases of group 1 and 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-45...+150°C
Mounting type	Installation in rigid piping system
Mounting position	any
Special version	Hand lever with shut-off device
Approvals	Mill test certificate 3.1 ATEX II 2G Ex h IIC T4 Gb / II 2D Ex h IIIC T135°C Db

Dimensions

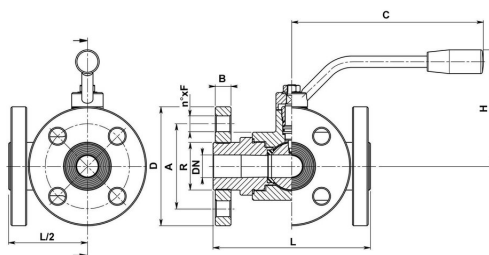

Nominal size DN[mm]	Flange according to EN1092-1	max. Operating pressure [bar]	H	D	F	L	R	A	C	B	Kv value [m ³ /h]	Weight [approx. kg]	Ball bore
25	PN40	40	110	115	4 x Ø14	150	51	85	170	14	64,5	6,18	T
2531.V90-QM100 2531.V90-QM101 2531.V90-QM102 2531.V90-QM103 2531.V90-QM104 2531.V90-QM105 2531.V90-QM106 2531.V90-QM87 2531.V90-QM88 2531.V90-QM89 2531.V90-QM90 2531.V90-QM91 2531.V90-QM92 2531.V90-QM93 2531.V90-QM94 2531.V90-QM95 2531.V90-QM96 2531.V90-QM97 2531.V90-QM98 2531.V90-QM99													

Illustrations non-binding Design, dimensional and material changes reserved

Armatures / Ball valves - manually operated / Other materials - A02 / Other materials - A02 / [BA305-25-LLD-A3C] BA305-25-LLD-A3C

