


Prirubnički kuglasti ventil od nehrđajućeg čelika Serija BA489-LLD-EB0X



Izvedba	Prolazni kuglasti ventil s plivajućom kuglom, puni prolaz
Aktiviranje	okretanjem ručne poluge za 90°
Priključak	okretne prirubnice prema EN1092-1
Materijali	Kućište Nehrđajući čelik 1.4404 polirano, Kugla Nehrđajući čelik 1.4404, Ručna poluga nehrđajući čelik 1.4307 plastificiran, Kuglasto brtvljenje MPTFE, Brtva vretena PTFE, O-prsten EPDM
Područje primjene	Tekućine i plinovi skupine 1 i 2 sukladno PED 2014/68/EU, koji ne napadaju upotrijebljene materijale.
Temperatura medija	-20...+150°C
Način pričvršćivanja	Ugradnja u kruti cjevovodni sustav
Položaj ugradnje	proizvoljno
Specijalna izvedba	Ručna poluga s uređajem za zatvaranje
Odobrenja	Tvornički certifikat 3.1 ATEX II 2G Ex h IIC T4 Gb / II 2D Ex h IIIC T135°C Db

Dimenzije

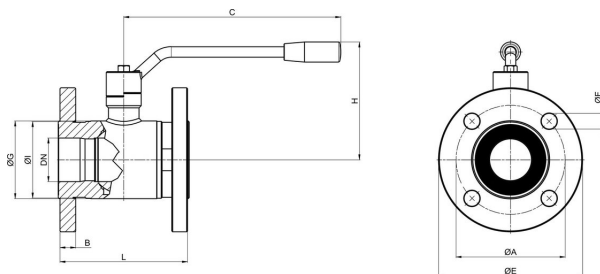


Nazivni promjer DN[mm]	Prirubnica prema EN1092-1	maks. Radni tlak [bar]	A	B	C	ØE	F	ØG	H	ØI	L	Kv vrijednost [m ³ /h]	Težina [cca. kg]	Tip
40	PN40	40	110	16	240	148	4 x Ø18	73	130	75	140	170	6,45	BA489-40-LLD-A3C EB0X98
2992.V16-QM01 2992.V17-QM01 2993.V16-QM01														
50	PN40	40	125	18	240	165	4 x Ø18	89	135	89	150	280	8,9	BA489-50-LLD-A3C EB0X98
2994.V17-QM01														

Slike nisu obvezujuće Zadržavamo pravo na konstrukcijske, dimenzijske i promjene materijala.



TCR-Module with two inductive proximity switches IFM type IS5001,
in TCR-Housing 146 x 64 x 74 mm, with high vision beacon

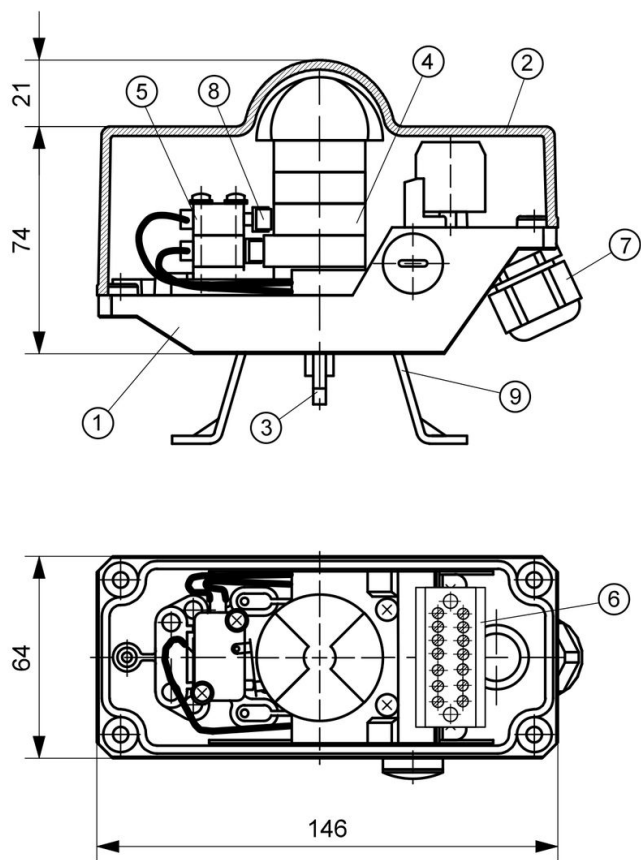

TECHNICAL DATA

Manufacturer: IFM
Type: IS5001
IS-3002-BPKG
inductive, PNP
normally open contact

Operating distance: 2 mm
Nominal voltage: 10 ...30 V DC
Operating current: 0 ... 200 mA
Switch. frequency: 0 ... 800 Hz
Signal: LED, yellow
Temperature: -25 ... +80°C
Housing base: Vestamid, black
Housing cover: Macrolon, clear
with vision beacon


Sealing: EPDM
Ingress protection: IP67 (Sensor)
IP65 (Housing)

Switch. precision: < 1.5°
System connect.: Cable gland M20x1,5
Clamp. range 8...13 mm

OBJECT LIST

Pos.	Pcs.	Description	Material
1	1	Housing base	Vestamid
2	1	Housing cover	Macrolon
3	1	TCR-Axis	POM
4	1	Switch cam system	POM
5	2	IFM IS5001	-
6	1	Terminal block, 7-pole	-
7	1	Cable gland M20x1,5	PA
8	2	Roller lever	-
9	1	Bracket size 1 - 4	A2

WIRING DIAGRAM

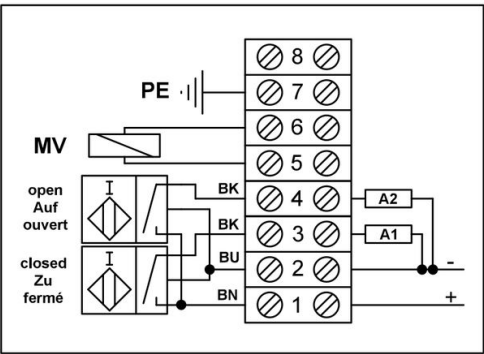

spojnice / Kuglasti ventili – ručni / Ostali asortiman - A02 / Prirubnički kuglasti ventil Serija BA489 / [BA489-40-LLD-A3C-EBOX98] BA489-40-LLD-A3C-EBOX98

