

Stainless steel ball valves with pneumatic rotary actuator


Series BA081



Design type	Actuator: piston actuator with 2 opposed pistons, elastic sealing, actuator in all details in accordance with ISO 5211 or according to NAMUR recommendations, End positions adjustable on both sides $\pm 5^\circ$
Connection	RP1/2"...RP2" according to ISO7/1
Materials Standard version	Actuator: Hard anodized aluminium, Pinion, nickel-plated steel, Piston guide POM, Seals NBR Ball valve: Body and ball stainless steel 1.4401, Seals PTFE/FKM
Function	available in double-acting or single-acting Version
Mounting type	Installation in rigid piping system
Mounting position	any
Control medium	filtered and lubricated or non-lubricated compressed air
Application range	gaseous and liquid media that do not attack the materials used
Medium temperature	$-20...+160^\circ\text{C}$
Ambient temperature	$-20...+85^\circ\text{C}$
Control pressure	5,5...8bar, Adaptation to lower pilot pressures possible on request
Operating pressure	0bar up to Operating pressure according to table and pressure-temperature diagram, not suitable for vacuum
Special version	Stainless steel pinion, Ambient temperatures from $-40...+85^\circ\text{C}$ or rather $-20...150^\circ\text{C}$, ATEX EX II 2G Ex h IIC T6...T1 Gb / II 2D Ex h IIIC T85°C...T450°C Db - ATEX II 2 G/D c T6
Accessories	assembled manual, pneumatic or electric control valve electrical end position feedback, Positioner in I/P or P/P version Adjustment of the switching speed
Ordering note	When ordering, please also specify pilot pressure, operating medium, operating pressure and operating temperature.
Application note	The pressure and temperature specifications are maximum values for normal conditions, for lubricating or non-degreasing media. Degreasing media in particular reduce the specified values and increase the required torque. For these special cases, we recommend prior consultation. When selecting the valve, the lowest control pressure occurring in the system must be taken as the basis.



Dimensions

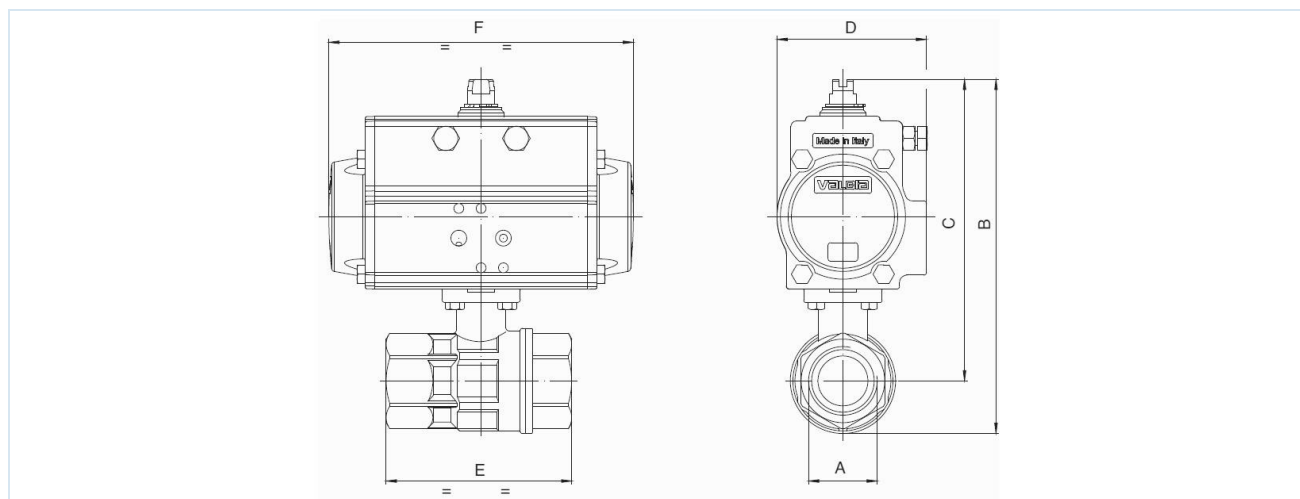

Ball valves with double-acting rotary actuator

Connection A	Nominal size DN [mm]	max. operating pressure [bar] up to 85°C	B	C	D	E	F	Actuator type	Kv value [m ³ /h]	Weight [approx. kg]	Type
RP1/2"	15	40	115	98	45	67	110	PAD032	19,2	0,9	BA081-12-D0
RP1/2"	15	64	151,5	134,5	71	67	141	PAD052	19,2	1,5	BA081-12-D0-B*
RP3/4"	20	40	121	100	45	78	110	PAD032	35	1,0	BA081-34-D0
RP3/4"	20	64	157,5	136,5	71	78	141	PAD052	35	1,6	BA081-34-D0-B*
RP1"	25	40	136	110	45	90	110	PAD032	64,5	1,3	BA081-10-D0
RP1"	25	64	172,5	146,5	71	90	141	PAD052	64,5	1,9	BA081-10-D0-B*
RP1 1/4"	32	40	146	113	45	100	110	PAD032	103,8	1,6	BA081-114-D0
RP1 1/4"	32	64	182,5	149,5	71	100	141	PAD052	103,8	2,2	BA081-114-D0-B*
RP1 1/2"	40	40	203	165	71	112	141	PAD052	174	2,9	BA081-112-D0
RP2"	50	40	223	174	71	135	141	PAD052	301,3	4,1	BA081-20-D0
RP2 1/2"	65	25	289	227	95	160	210	PAD075	545,7	8,9	BA081-212-D0
RP3"	80	25	306	234	95	180	210	PAD075	872,5	12,3	BA081-30-D0

For ATEX versions, the type is suffixed with -A at the end.

*With the suffix B, the ball valves are equipped with the PAD052 actuator. When using limit switch boxes and NAMUR control valves, B types must be used. For ATEX versions, the suffix B is replaced by AB.

Ball valves with single-acting rotary actuator

Connection A	Nominal size DN[mm]	max. operating pressure [bar] up to 85°C	B	C	D	E	F	Actuator type	Kv value [m ³ /h]	Weight [approx. kg]	Type
RP1/2"	15	40	152	134	71	67	141	PAS0525	16,3	1,7	BA081-12-S0
RP3/4"	20	40	157	136	71	78	141	PAS0525	29,5	1,8	BA081-34-S0
RP1"	25	40	172	146	71	90	141	PAS0525	43	2,1	BA081-10-S0
RP1 1/4"	32	40	182	150	71	100	141	PAS0525	89	2,4	BA081-114-S0
RP1 1/2"	40	40	215	177	81	112	164	PAS0635	230	3,8	BA081-112-S0
RP2"	50	40	235	186	81	135	164	PAS0635	301,3	5,0	BA081-20-S0
RP2 1/2"	65	25	316	254	123	160	275	PAS1005	545,7	13,2	BA081-212-S0
RP3"	80	25	333	260	123	180	275	PAS1005	872,5	16,5	BA081-30-S0

Single-acting actuators are supplied spring-closing (NC) unless otherwise ordered.

For ATEX versions, the type is suffixed with -A at the end.

Illustrations non-binding

Design, dimensional and material changes reserved

Armatures / Ball valves - automatically operated / Other materials - A03 / Ball valve with pneumatic actuator Series BA081-D0

Version 2

261157 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

