

Linearna vodilica za ISO cilindre s priborom Serija GLC



Izvedba	Linearna vodilica za montažu na cilindar prema ISO 6432, ISO 15552
Tijelo	anodizirani aluminij
Vodilice (vodilne šipke)	Brušeni nehrđajući čelik
Klizni ležaj	Mjed
Napomena	sve linearne vodilice opremljene su brtvama strugačima CAD-datoteke dostupne su u STASTO Storeu na www.stasto.eu

Ključ tipa


GLC	---	---
	20 ø20	Hod [mm]
	25 ø25	
	32 ø32	
	40 ø40	
	50 ø50	
	63 ø63	
	80 ø80	
	100 ø100	

Standardni hodovi, Težina

Ø	25	50	80	100	125	160	200	250	300	400	500	Težina za jedinicu hoda "0" [kg]	Dodati težinu po 100 mm hoda [kg]
20	•	•	•	•	•	•	•	•				0,67	0,115
25	•	•	•	•	•	•	•	•				0,66	0,115
32	•	•	•	•	•	•	•	•				0,66	0,122
40	•	•	•	•	•	•	•	•	•	•	•	0,96	0,176
50	•	•	•	•	•	•	•	•	•	•	•	1,4	0,176
63	•	•	•	•	•	•	•	•	•	•	•	1,7	0,176
80	•	•	•	•	•	•	•	•	•	•	•	3,5	0,312
100	•	•	•	•	•	•	•	•	•	•	•	4,7	0,312
Specijalni hod na upit													



Linearna vodilica Ø20 i 25

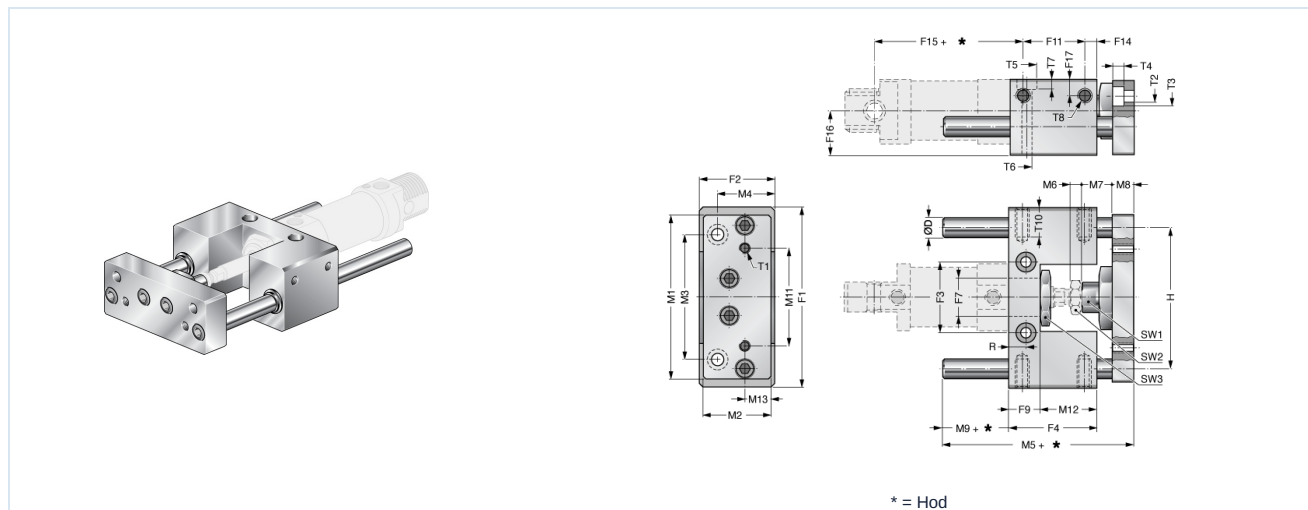


Ø	ØD	F1	F2	F3	F4	ØF7	F9	F11	F14	F15	F16	F17	H	M1	M2	M3	M4	M5	M6	Tip
20	10	100	40	46,5	48	22	17	32	8	71	24	10	74	90	38	70	30	77	4	GLC20...
25	10	100	40	46,5	48	22	17	32	8	76	24	10	74	90	38	70	30	77	6	GLC25...

Ø	M7	M8	M9	M11	M12	M13	R	ØT1	ØT2	ØT3	T4	ØT5	T6	T7	ØT8	T10	SW1	SW2	SW3	Tip
20	22	12	12	55	31	14	8,5	M6	6,5	10,5	7	14	9	9	M8	16	13	13	17	GLC20...
25	22	12	6	55	31	14	8,5	M6	6,5	10,5	7	14	9	9	M8	16	13	17	17	GLC25...

Adapter za Ø12 i Ø16 vidi tablicu setova adaptera

Montažna ploča za linearnu vodilicu Ø20 i 25

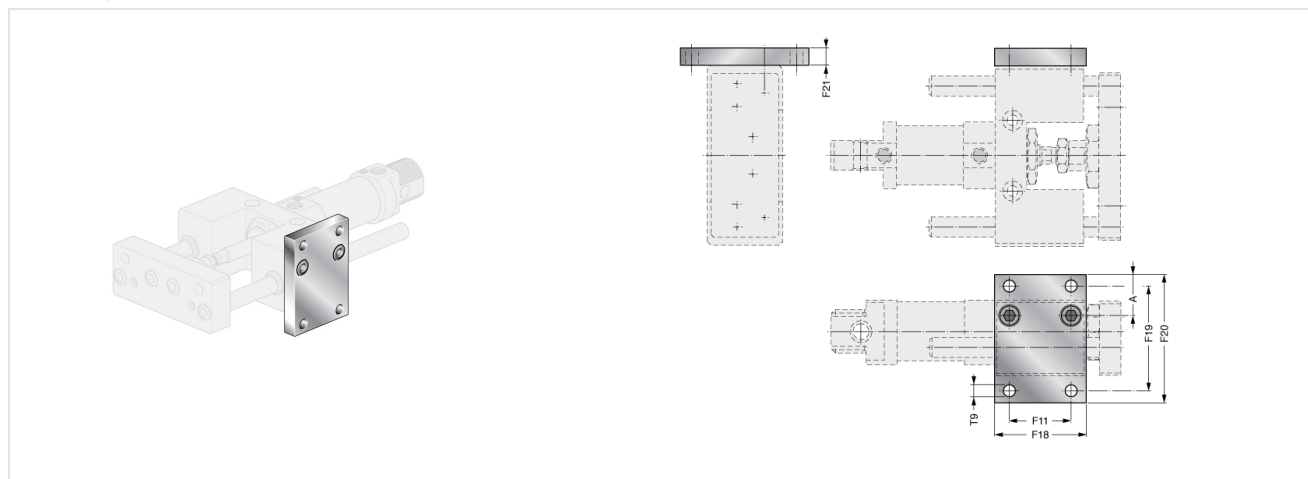

Ø	A	F11	F18	F19	F20	F21	ØT9	Težina [kg]	Tip
20/25	25	32	50	56	70	10	7	0,26	GLC2025P

Materijal: pocinčani čelik

Sadržaj isporuke: uklj. 2 Montažni vijci

Verzija 2

260614 / Generirano 2026/33 HR

PROIZVEDENO U EUROPI

+381 11 2399521
balkan@stasto.eu
© STASTO Automatizacija d.o.o.



www.stasto.rs

Otvori seriju online

Stranica 2 / 4



Linearna vodilica Ø32...100

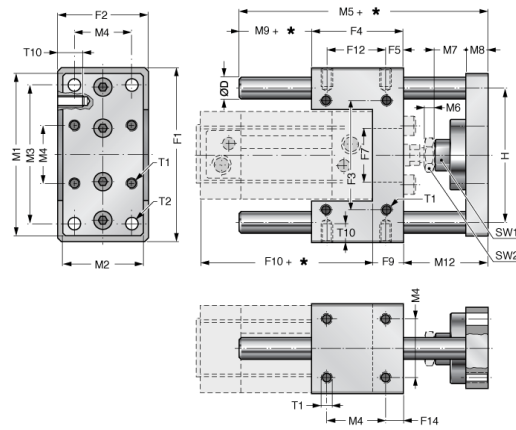



* = Hod

Ø	ØD	F1	F2	F3	F4	ØF7	F9	F10	F12	F5	F14	H	M1	M2	M3	M4	M5	M6	M7	M8	M9	M12	ØT1	ØT2	T10	SW1	SW2	Tip
32	10	100	48	58	48	30	17	94	32,5	7,8	7,8	74	90	45	78	32,5	106	6	17	12	13	45	M6	6,5	12	15	17	GLC32...
40	12	106	56	64	58	35	21	105	38	10	10	80	100	50	84	38	117	7	22	12	6	53	M6	6,5	12	15	19	GLC40...
50	12	125	66	80	59	40	25	106	46,5	6,3	6,3	96	120	60	100	46,5	129	8	26	15	6	64	M8	8,5	16	22	24	GLC50...
63	12	132	76	95	76	45	25	121	56,5	9,8	9,8	104	125	70	105	56,5	146	8	26	15	6	64	M8	8,5	16	22	24	GLC63...
80	16	165	98	130	90	45	34	128	50	20	9	130	155	90	130	72	170	9	33	16	8	72	M10	11	18	27	30	GLC80...
100	16	185	118	150	110	55	39	138	70	20	10,5	150	175	110	150	89	190	9	33	16	8	72	M10	11	18	27	30	GLC100...

Adapter za Ø20 i Ø25 vidi tablicu setova adaptera

Montažna ploča za linearnu vodilicu Ø32...100

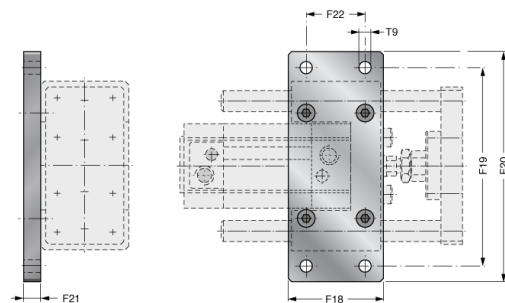

Ø	F18	F19	F20	F21	F22	ØT9	Težina [kg]	Tip
32	50	116	130	10	32,5	6,5	0,5	GLC32P
40	55	126	142	10	38	8,5	0,6	GLC40P
50	70	150	170	12	46,5	8,5	1,1	GLC50P
63	80	156	176	12	56,5	8,5	1,3	GLC63P
80	100	195	220	15	80	12	2,55	GLC80P
100	120	217	245	15	95	14	3,39	GLC100P

Materijal: pocinčani čelik

Sadržaj isporuke: uklj. 4 Montažni vijci

Verzija 2

260614 / Generirano 2026/33 HR

PROIZVEDENO U EUROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Stranica 3 / 4




Adapterski setovi

	Linearna vodilica Tip	Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80
	GLC20../GLC25..	RF25/12 N12/25	RF25/16 NC16/25							
	GLC32..			RF32/20 NC20/32	RF32/25 NC25/32					
	GLC40..			RF40/20 N20/40	RF40/25 N25/40	•				
	GLC50..					RF50/32 N32/50	•			
	GLC63..					RF63/32 N32/63	RF63/40 N40/63	•		
	GLC80..						RF80/40 N40/80	RF80/50 N50/80	•	
	GLC100..							RF100/50 N50/100	RF100/63 N63/100	•

- isporučivo na zahtjev

Maksimalno opterećenje

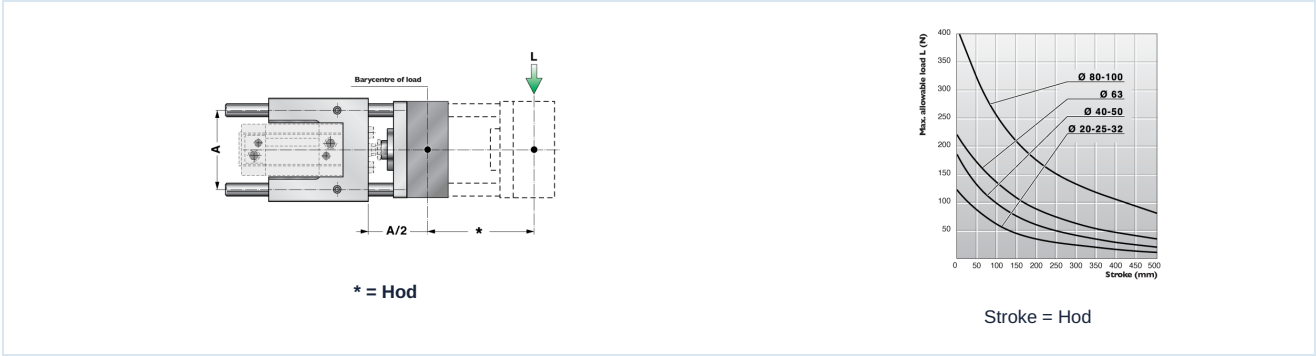

Slike nisu obvezujuće
Zadržavamo pravo na konstrukcijske, dimenzijske i promjene materijala.