

Vtični priključki "Push-In" - POM Serija PI-P



PI10



PI12



PI12



PI13



PI16



PI16



PI16C



PI17



PI19



PI19C



PI21



PI21C



PI23



PI24



PI24C



PI29



PI30



PI30



PI35



PI38



PI38



PI40



PI43



PI44



PI48



PI14




PI20



DI25


Konstrukcija	Vtična spojka z O-tesnilom in pritrdilnimi kleščami za povezavo plastičnih cevi
Priključek	R1/8" do R1/2" izbirno cilindrično po ISO 228/1 ali konično po ISO 7/1 z PTFE-prevleko, M5 po ISO R/262
Zunanji premer cevi	4mm...12mm
Materiali	Telo POM, sprostitutveni obroč POM, vpenjalna puša Nerjavno jeklo 1.4310, Navoj Medenina nikljana, Tesnila NBR
priporočeno Materiali cevi	Poliamid (PA), Poliuretan (PU/CP), polietilen (PE), PTFE (PT)
Tolerance cevi	+/- 0,07 mm do premera 10 mm, +/- 0,1 mm od premera 12 mm
Medij	Stisnjen zrak, nevtralni plini
Temperatura medija	-20...+70°C
Obratovalni tlak	-0,99...18bar, odvisno od maksimalnega tlaka uporabljene cevi

PI10 vtisna kartuša primerno za ohišje iz plastike, medenine ali aluminija


	Ø	D1	L1	Teža [g]	Tip
	4	9	14,5	2,8	PI10-04-P
	6	11,5	16,5	4,6	PI10-06-P
	8	13,5	17	6,4	PI10-08-P
	10	15,5	18,5	8,4	PI10-10-P




PI10 Skica za vtisni sedež

	Ø	D1	D2	D3	D4	L1	L2	Tip
	4	9,5	9,2	3	8,6	12	3,2	PI10-04-P
	6	11,7	11,4	5	10,8	14	4	PI10-06-P
	8	13,5	13,6	7	13	14,5	4	PI10-08-P
	10	15,5	15,7	9	15,1	16	4	PI10-10-P


PI12 Ravno Vijačna priključna spojka - Navoj cilindričen

	Ø	D1	D2	D3	L1	L2	CH	Teža [g]	Tip
	4	G1/8"	9,5	15	6	21	10	2,5	PI12-04-18-P-0-YA
	6	G1/8"	11,5	15	6	24	12	2,7	PI12-06-18-P-0-YA
	6	G1/4"	11,5	18	7	24	12	4,1	PI12-06-14-P-0-YA
	8	G1/8"	14	15	6	25,5	14	2,9	PI12-08-18-P-0-YA
	8	G1/4"	14	18	7	24	14	3,8	PI12-08-14-P-0-YA
	8	G3/8"	14	22	7	24	14	5,9	PI12-08-38-P-0-YA
	10	G1/4"	16	18	7	27	16	4	PI12-10-14-P-0-YA
	10	G3/8"	16	22	7	25	16	6,2	PI12-10-38-P-0-YA

PI38 Navojni vtični nastavek - Navoj cilindričen


	D1	D2	D3	L1	L2	CH	Teža [g]	Tip
	4	G1/8"	15,5	6	27	14	1,9	PI38-04-18-P-0
	6	G1/8"	15,5	6	30	14	2,1	PI38-06-18-P-0
	6	G1/4"	18,5	8	33,5	17	3,3	PI38-06-14-P-0
	8	G1/8"	15,5	6	32	14	2,2	PI38-08-18-P-0
	8	G1/4"	18,5	8	35,5	17	3,6	PI38-08-14-P-0
	8	G3/8"	23,5	9	37	21	5,5	PI38-08-38-P-0
	10	G1/4"	18,5	8	37,5	17	3,5	PI38-10-14-P-0
	10	G3/8"	23,5	9	39	21	5,5	PI38-10-38-P-0

PI17 Kotni priključek


	Ø	D1	L1	Teža [g]	Tip
	4	9,7	15,5	2,3	PI17-04-P
	6	12	19,7	3,8	PI17-06-P
	8	14	21,5	4,9	PI17-08-P
	10	16	23,5	6,3	PI17-10-P
	12	19	27	9,6	PI17-12-P




PI29 T-spojnik

	Ø	D1	L1	Teža [g]	Tip
	4	9,7	15,2	3,4	PI29-04-P
	6	12	19,7	5,5	PI29-06-P
	8	14	21,5	7,1	PI29-08-P
	10	16	23,5	8,9	PI29-10-P
	12	19	27	13,9	PI29-12-P


PI16C Vrtljiva kotna vijačna priključna spojka - Navoj stožčast

	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	R1/8"	9,7	7,5	17	15,5	10	6,5	PI16C-04-18-P-T-360
	4	R1/4"	9,7	11	20,5	15,5	14	11,5	PI16C-04-14-P-T-360
	6	R1/8"	12	7,5	18,8	20	12	8,5	PI16C-06-18-P-T-360
	6	R1/4"	12	11	23,3	20	14	13,6	PI16C-06-14-P-T-360
	8	R1/8"	14	7,5	19,5	21,5	12	9	PI16C-08-18-P-T-360
	8	R1/4"	14	11	24	21,5	14	14,1	PI16C-08-14-P-T-360
	8	R3/8"	14	11,5	24,5	21,5	17	19	PI16C-08-38-P-T-360
	10	R1/4"	16	11	25,5	24	16	17,3	PI16C-10-14-P-T-360
	10	R3/8"	16	11,5	26,5	24	17	21,7	PI16C-10-38-P-T-360

PI19C Vrtljiv kotni vijačni priključek, dolg - Navoj stožčast


	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	R1/8"	9,7	7,5	26	15,5	10	10,1	PI19C-04-18-P-T-360
	4	R1/4"	9,7	11	30	15,5	14	16,1	PI19C-04-14-P-T-360
	6	R1/8"	12	7,5	33,3	20	12	17,7	PI19C-06-18-P-T-360
	6	R1/4"	12	11	37,8	20	14	20,6	PI19C-06-14-P-T-360
	8	R1/8"	14	7,5	34	21,5	12	18	PI19C-08-18-P-T-360
	8	R1/4"	14	11	38,5	21,5	14	20,8	PI19C-08-14-P-T-360
	8	R3/8"	14	11,5	39	21,5	17	27,4	PI19C-08-38-P-T-360
	10	R1/4"	16	11	42	24	16	36,5	PI19C-10-14-P-T-360
	10	R3/8"	16	11,5	43	24	17	35,1	PI19C-10-38-P-T-360

PI16 Vrtljiva kotna vijačna priključna spojka - Navoj cilindričen


	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	M5x0,8	9,7	4	15	15,5	9	4,6	PI16-04-M5-P-0-360
	4	G1/8"	9,7	5	15	15,5	13	7,1	PI16-04-18-P-0-360
	4	G1/4"	9,7	6,5	17	15,5	16	11,2	PI16-04-14-P-0-360
	6	M5x0,8	12	4	15,3	20	12	7,9	PI16-06-M5-P-0-360
	6	G1/8"	12	5	17,3	20	12	8,4	PI16-06-18-P-0-360
	6	G1/4"	12	6,5	19,3	20	15	12,5	PI16-06-14-P-0-360
	8	G1/8"	14	5	18	21,5	12	8,9	PI16-08-18-P-0-360
	8	G1/4"	14	6,5	20	21,5	15	13	PI16-08-14-P-0-360
	8	G3/8"	14	7	21,5	21,5	20	21,4	PI16-08-38-P-0-360
	10	G1/4"	16	6,5	21,5	24	16	15,6	PI16-10-14-P-0-360
	10	G3/8"	16	7	23,5	24	20	22,9	PI16-10-38-P-0-360
	12	G3/8"	19	7	24	28,5	20	27,3	PI16-12-38-P-0-360
	12	G1/2"	19	8,5	28,5	28,5	20	35	PI16-12-12-P-0-360




PI19 Vrtljiv kotni vijačni priključek, dolg - Navoj cilindričen

	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	M5x0,8	9,7	4	23,8	15,5	9	9,1	PI19-04-M5-P-0-360
	4	G1/8"	9,7	5	24	15,5	13	12,2	PI19-04-18-P-0-360
	4	G1/4"	9,7	6,5	26	15,5	16	13,8	PI19-04-14-P-0-360
	6	M5x0,8	12	4	29,8	20	13	20,9	PI19-06-M5-P-0-360
	6	G1/8"	12	5	31,8	20	13	19,6	PI19-06-18-P-0-360
	6	G1/4"	12	6,5	33,8	20	16	20,6	PI19-06-14-P-0-360
	8	G1/8"	14	5	32,8	21,5	13	20	PI19-08-18-P-0-360
	8	G1/4"	14	6,5	32,5	21,5	16	21	PI19-08-14-P-0-360
	8	G3/8"	14	7	34,5	21,5	20	29,4	PI19-08-38-P-0-360
	10	G1/4"	16	6,5	37	24	16	32,3	PI19-10-14-P-0-360
	10	G3/8"	16	7	39	24	20	36,8	PI19-10-38-P-0-360

PI14 Vrtljiv kotni vijačni priključek - Navoj cilindričen


	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Teža [g]	Tip
	4	M5x0,8	9,7	9,7	4	11	19	17	4	6	PI14-04-M5-P-0-360
	4	G1/8"	9,7	15	5	15	25,5	18,5	4	12	PI14-04-18-P-0-360
	6	M5x0,8	12	9,7	4	11	19	21	4	6	PI14-06-M5-P-0-360
	6	G1/8"	12	15	5	15	25,5	22	4	13	PI14-06-18-P-0-360
	6	G1/4"	12	18	6,5	17,5	29	23,5	5	22	PI14-06-14-P-0-360
	8	G1/8"	14	15	5	15	25,5	22,5	4	14	PI14-08-18-P-0-360
	8	G1/4"	14	18	6,5	17,5	29	24	5	22	PI14-08-14-P-0-360
	8	G3/8"	14	23	7	19,5	32,5	26	6	35	PI14-08-38-P-0-360
	10	G1/4"	16,5	18	6,5	17,5	29	26	5	23	PI14-10-14-P-0-360
	10	G3/8"	16,5	23	7	19,5	32,5	28	6	36	PI14-10-38-P-0-360

PI21C Vrtljiva T-vijačna priključna spojka - Navoj stožčast


	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	R1/8"	9,7	7,5	17	15,7	10	7,5	PI21C-04-18-P-T-360
	4	R1/4"	9,7	11	20,5	15,7	14	13,8	PI21C-04-14-P-T-360
	6	R1/8"	12	7,5	18,8	20,2	12	10,1	PI21C-06-18-P-T-360
	6	R1/4"	12	11	23,3	20,2	14	15,2	PI21C-06-14-P-T-360
	8	R1/8"	14	7,5	19,5	21,7	14	11,2	PI21C-08-18-P-T-360
	8	R1/4"	14	11	24	21,7	14	16,4	PI21C-08-14-P-T-360
	8	R3/8"	14	11,5	24,5	21,7	17	21,4	PI21C-08-38-P-T-360
	10	R1/4"	16,5	11	25,5	24	16	19,9	PI21C-10-14-P-T-360
	10	R3/8"	16,5	11,5	26,5	24	17	27	PI21C-10-38-P-T-360




PI21 Vrtljiva T-vijačna priključna spojka - Navoj cilindričen

	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	M5x0,8	9,7	4	14,8	15,7	9	5,6	PI21-04-M5-P-0-360
	4	G1/8"	9,7	5	15	15,7	13	8,2	PI21-04-18-P-0-360
	4	G1/4"	9,7	6,5	17	15,7	16	12	PI21-04-14-P-0-360
	6	M5x0,8	12	4	15,3	20,2	12	9,2	PI21-06-M5-P-0-360
	6	G1/8"	12	5	17,3	20,2	13	9,8	PI21-06-18-P-0-360
	6	G1/4"	12	6,5	19,3	20,2	16	13,6	PI21-06-14-P-0-360
	8	G1/8"	14	5	18	21,7	14	11,1	PI21-08-18-P-0-360
	8	G1/4"	14	6,5	20	21,7	16	15,1	PI21-08-14-P-0-360
	8	G3/8"	14	7	21,5	21,7	20	23,7	PI21-08-38-P-0-360
	10	G1/4"	16,5	6,5	21,5	24	16	18	PI21-10-14-P-0-360
	10	G3/8"	16,5	7	23,5	24	20	25,2	PI21-10-38-P-0-360

PI24C Vrtljiva T-vijačna priključna spojka - Navoj stožčast


	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	R1/8"	9,7	7,5	17	15,5	10	7,4	PI24C-04-18-P-T-360
	4	M5x0,8	9,7	11	20,5	15,5	14	12,6	PI24C-04-14-P-T-360
	6	R1/8"	12	7,5	18,8	20	12	10,1	PI24C-06-18-P-T-360
	6	R1/4"	12	11	23,5	20	14	15,3	PI24C-06-14-P-T-360
	8	R1/8"	14	7,5	19,5	21,5	14	10,9	PI24C-08-18-P-T-360
	8	R1/4"	14	11	24	21,5	14	16,3	PI24C-08-14-P-T-360
	8	R1/4"	14	11,5	24,5	21,5	17	23,7	PI24C-08-38-P-T-360
	10	R3/8"	16,5	11	25,5	24	16	22,5	PI24C-10-14-P-T-360
	10	R3/8"	16,5	11,5	26,5	24	17	26,7	PI24C-10-38-P-T-360

PI24 Vrtljiva T-vijačna priključna spojka - Navoj cilindričen


	Ø	D1	D2	L1	L2	L3	CH	Teža [g]	Tip
	4	M5x0,8	9,7	4	14,8	15,5	9	5,6	PI24-04-M5-P-0-360
	4	G1/8"	9,7	5	15	15,5	13	8,2	PI24-04-18-P-0-360
	4	G1/4"	9,7	6,5	17	15,5	16	13	PI24-04-14-P-0-360
	6	M5x0,8	12	4	15,3	20	12	10,3	PI24-06-M5-P-0-360
	6	G1/8"	12	5	17,3	20	13	9,9	PI24-06-18-P-0-360
	6	G1/4"	12	6,5	19,3	20	16	14	PI24-06-14-P-0-360
	8	G1/8"	14	5	18	21,5	14	10,8	PI24-08-18-P-0-360
	8	G1/4"	14	6,5	20	21,5	16	14,8	PI24-08-14-P-0-360
	8	G3/8"	14	7	21,5	21,5	20	27,4	PI24-08-38-P-0-360
	10	G1/4"	16,5	6,5	21,5	24	16	20	PI24-10-14-P-0-360
	10	G3/8"	16,5	7	23,5	24	20	2	PI24-10-38-P-0-360




PI13 Ravni spojnik

	Ø 1	Ø 2	D1	L1	Teža [g]	Tip
	4	4	9,7	26,5	2,2	PI13-04-P
	6	6	12	34	3,4	PI13-06-P
	6	4	12	30	4	PI13-06-04-P
	8	8	14	33,5	4,3	PI13-08-P
	8	6	14	33	6	PI13-08-06-P
	10	10	16,5	37,5	5,5	PI13-10-P
	10	8	16,5	36,5	7	PI13-10-08-P
	12	12	19	41	7,6	PI13-12-P
	12	8	19	42	8	PI13-12-08-P-A
	12	10	19	42	8	PI13-12-10-P
	14	14	22,5	49	10	PI13-14-P

PI12 Redukcija

	Ø	D1	D2	L1	Teža [g]	Tip
	4	6	10	31	2	PI12-04-06-P
	4	8	10	32	2	PI12-04-08-P
	4	10	10	37	3	PI12-04-10-P
	6	4	12	33	3	PI12-06-04-P
	6	8	12	36	3	PI12-06-08-P
	6	10	12	36	4	PI12-06-10-P
	6	12	12	40	4	PI12-06-12-P
	8	6	14	33,5	4	PI12-08-06-P
	8	10	14	38,5	5	PI12-08-10-P
	8	12	14	39,5	6	PI12-08-12-P
	10	12	16,5	44	7	PI12-10-12-P


PI35 L-obročni kos

	Ø	D1	D2	D3	L1	L2	Teža [g]	Tip
	4	M5	9,7	9,7	10	17,6	1,9	PI35-04-M5-P
	4	7	9,7	9,7	10	17,6	2,3	PI35-04-M5-P-M*
	4	1/8"	9,7	15	15	19,1	3	PI35-04-18-P
	6	7	12	9,7	10	21,5	3,1	PI35-06-M5-P-M*
	6	1/8"	12	15	15	22,7	3,5	PI35-06-18-P
	6	1/4"	12	18	17	24,3	4,2	PI35-06-14-P
	8	1/8"	14	15	15	23	3,8	PI35-08-18-P
	8	1/4"	14	18	17	24,6	4,6	PI35-08-14-P
	8	3/8"	14	23	20	26,5	6,5	PI35-08-38-P
	10	1/4"	16	18	17	27	5,2	PI35-10-14-P
	10	3/8"	16,5	23	20	28,5	8,4	PI35-10-38-P


*za Dušilni ventil z vrtljivim priključkom in Dušilno nepovratni ventil z vrtljivim priključkom




PI23 Y-spojnik

	Ø	D1	D2	L1	L2	L3	Teža [g]	Tip
	4	9,7	2,7	27	10,7	20,5	5	PI23-04-P
	6	12	3,2	34	13	25	9	PI23-06-P
	8	14	3,2	36	15	29	11	PI23-08-P
	10	16	3,2	41	18	34,5	14	PI23-10-P


PI30 Y-spojnik z vtičnim nastavkom

	Ø	D1	D2	D3	L1	L2	L3	L4	Teža [g]	Tip
	4	4	2,7	9,7	40	25	10,7	20,5	5	PI30-04-P
	4	6	2,7	9,7	43	25	10,7	20,5	6	PI30-04-06-P
	4	8	2,7	9,7	45	25	10,7	20,5	6	PI30-04-08-P
	6	6	3,2	12	50	32	13	25	9	PI30-06-P
	8	8	3,2	14	54	34	15	29	12	PI30-08-P


PI30 Vrtljiva Y-vijačna priključna spojka - Navoj cilindričen

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Teža [g]	Tip
	4	M5x0,8	9,7	2,7	4	34	10,7	20,5	9	9	PI30-04-M5-P-0-360
	4	G1/8"	9,7	2,7	5	34	10,7	20,5	13	10	PI30-04-18-P-0-360
	4	G1/4"	9,7	2,7	6,5	36	10,7	20,5	16	14	PI30-04-14-P-0-360
	6	G1/8"	12	3,2	5	41	13	25	13	15	PI30-06-18-P-0-360
	6	G1/4"	12	3,2	6,5	43	13	25	16	19	PI30-06-14-P-0-360
	8	G1/8"	14	3,2	5	43	15	29	14	20	PI30-08-18-P-0-360
	8	G1/4"	14	3,2	6,5	45	15	29	16	21	PI30-08-14-P-0-360
	8	G3/8"	14	3,2	7	47	15	29	20	29	PI30-08-38-P-0-360

PI38 Priključni nastavek

	D1	L1	L2	Teža [g]	Tip
	4	15	33	0,6	PI38-04-P
	6	18	40	1,3	PI38-06-P
	8	20	45	1,8	PI38-08-P
	10	22	48	3,1	PI38-10-P

PI40 Zaporni zatič

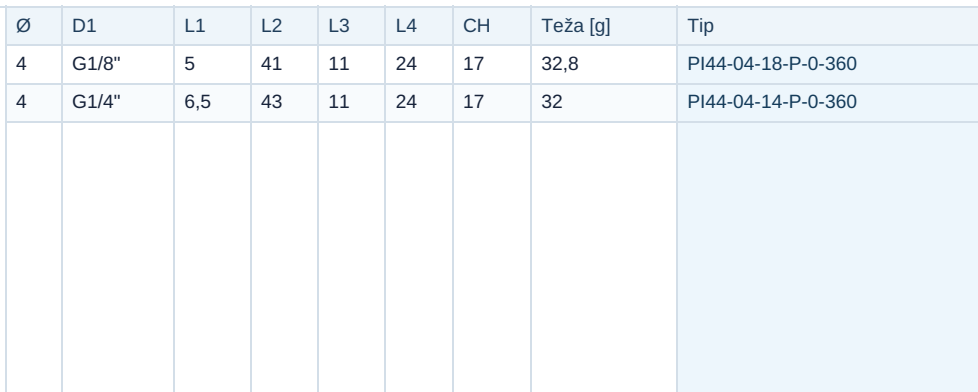
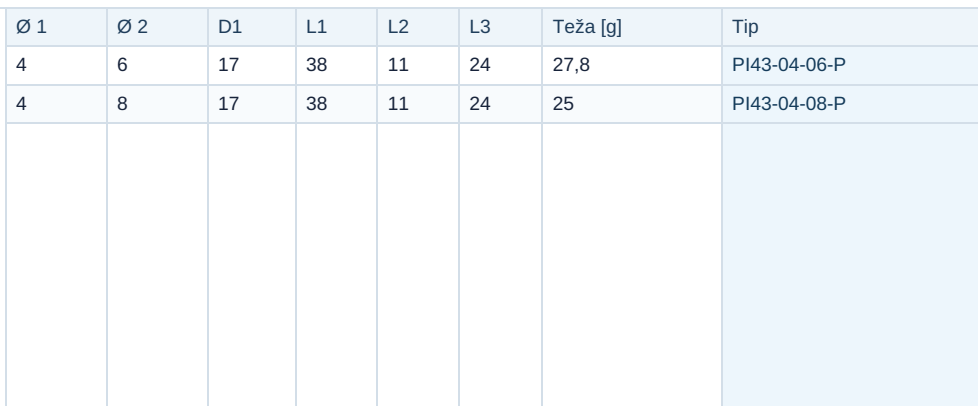
	D1	L1	Teža [g]	Tip
	4	18	0,4	PI40-04-P
	6	22	0,9	PI40-06-P
	8	25	1,3	PI40-08-P
	10	26	1,3	PI40-10-P




PI14 Vrtljiva kotna vijačna priključna spojka - Navoj cilindričen




PI44 Dvojni Y-vijačni priključek - Navoj cilindričen - vrtljiv



PI20 Vrtljiv Križni spojnik


	Ø	L1	L2	D	Teža [g]	Tip
	4	14	31	9,7	9,2	PI20-04-P-360
	6	17	39	12	11,9	PI20-06-P-360
	8	19,5	42	14	14,2	PI20-08-P-360
	10	23	47	16	25,8	PI20-10-P-360

PI48 Kotna pregradna spojka - vrtljiv

	Ø	L1 max	L2	L3	D1	D2	CH	Teža [g]	Tip
	4	6	27,1	15,5	M12x0,75	9,7	15	18	PI48-04-P-360
	6	6	33	20	M14x1	12	18	32,8	PI48-06-P-360
	8	8	35,7	21,5	M16x1	14	20	39,6	PI48-08-P-360
	10	9,5	40,3	24	M18x1	16	22	52,9	PI48-10-P-360
	12	10	44,5	28,5	M20x1	19	24	71,5	PI48-12-P-360

DI-PI430406P

PI16 Kotno priključno koleno z vtičnim nastavkom

	Ø	D1	D2	L1	L2	Teža [g]	Tip
	4	4	9,7	21,5	15,5	1,8	PI16-04-P
	6	6	12	25,5	20	3,3	PI16-06-P
	8	8	14	28,5	21,5	3,8	PI16-08-P

Ilustracije nezavezujoče

Pridržujemo si pravico do konstrukcijskih, dimenzijskih in materialnih sprememb

Pnevmatika / Vezni elementi in spojke / Vtični cevni priključki / Vtični cevni priključki - POM tlak -0,99...18bar

